

TRACCIA



Scan the QR-code for the latest information


■ GR-11 / Anodised grey / Matt

Series of reduced depth in-ground luminaires, comprising:


- Extruded anodised aluminium housing
- EPDM sealing gasket
- Technopolymer anti-glare grid
- Toughened, glass diffuser, silk-screened on the inside
- Through-wiring designed
- IP-rated external socket-plug fast connector (QUICK), complete with factory pre-wired cable
- Built-in driver
- Stainless steel locking hardware
- Recessed box to be ordered separately
- High heat-dissipating aluminium gear tray for increased inner components lifespan
- Integral unique device for field adjustable beam orientation (0° - 30°)
- Stand-alone or seamless linear compositions (up to 80 m) mounting options
- Static ON/OFF or dimmable DALI options available
- TRIMLESS options available. Consult factory




Fisherman monument - Egmond aan Zee - Netherlands



TRACCIA
500




TRACCIA
1000



TRACCIA
1500

Identifying and classifying our optics

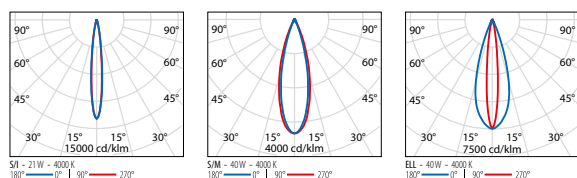

TRACCIA 500

IP67 - IK10 - 850 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	LENGTH (mm)	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz												
21	I	-	80	4000	S/I	12°	2000	1769	■	525	305311	✓
21	I	-	80	4000	S/M	30°	2000	1759	■	525	305312	✓
21	I	-	80	4000	ELL	13°x36°	2000	1573	■	525	305313	✓
21	I	-	80	3000	S/I	12°	1900	1530	■	525	305308	✓
21	I	-	80	3000	S/M	30°	1900	1522	■	525	305309	✓
21	I	-	80	3000	ELL	13°x36°	1900	1362	■	525	305310	✓

Power LED - dimmable DALI 220-240 V 50/60 Hz

21	I	-	80	4000	S/I	12°	2000	1769	■	525	3107556	✓
21	I	-	80	4000	S/M	30°	2000	1759	■	525	3107557	✓
21	I	-	80	4000	ELL	13°x36°	2000	1573	■	525	3107558	✓
21	I	-	80	3000	S/I	12°	1900	1530	■	525	3107553	✓
21	I	-	80	3000	S/M	30°	1900	1522	■	525	3107554	✓
21	I	-	80	3000	ELL	13°x36°	1900	1362	■	525	3107555	✓



TRACCIA 1000

IP67 - IK10 - 850 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	LENGTH (mm)	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz												
42	I	-	80	4000	S/I	12°	4000	3274	■	1025	305323	✓
42	I	-	80	4000	S/M	30°	4000	3257	■	1025	305324	✓
42	I	-	80	4000	ELL	13°x36°	4000	2906	■	1025	305325	✓
42	I	-	80	3000	S/I	12°	3800	2832	■	1025	305320	✓
42	I	-	80	3000	S/M	30°	3800	2817	■	1025	305321	✓
42	I	-	80	3000	ELL	13°x36°	3800	2513	■	1025	305322	✓



TRACCIA 1500


IP67 - IK10 - 850 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	LENGTH (mm)	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz												
63	I	-	80	4000	S/I	12°	5700	5197	■	1525	305335	✓
63	I	-	80	4000	S/M	30°	5700	5170	■	1525	305336	✓
63	I	-	80	4000	ELL	13°x36°	5700	4614	■	1525	305337	✓
63	I	-	80	3000	S/I	12°	5450	4496	■	1525	305332	✓
63	I	-	80	3000	S/M	30°	5450	4472	■	1525	305333	✓
63	I	-	80	3000	ELL	13°x36°	5450	3991	■	1525	305334	✓



Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
TRACCIA			
Recessed fixing Kit Traccia L500		310525	✓
Recessed fixing Kit Traccia L1000		310526	✓
Recessed fixing Kit Traccia L1500		310527	✓



310525
310526
310527



Complete unit
1A+1B = please order 2 codes

	components
A	gear body
B	recessed fixing kit

Optional accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
TRACCIA			
Wire for continuous power supply 3x1.5 mm		310569	✓



310569