


MIMIK 30

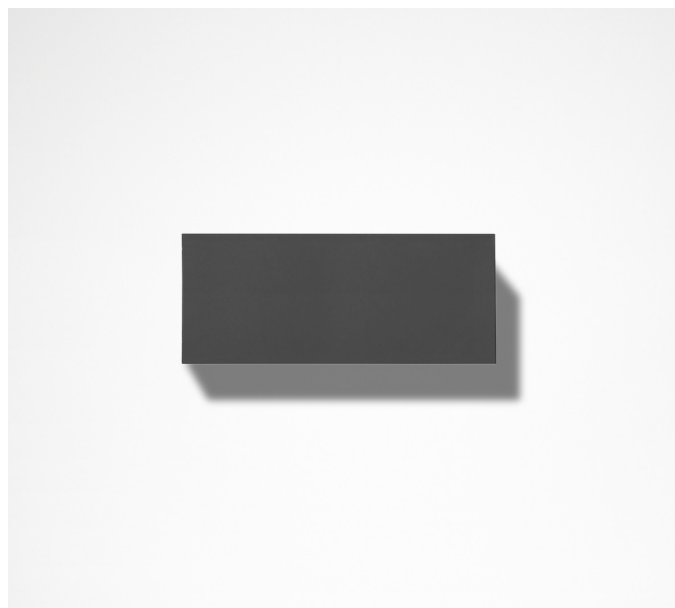


Scan the QR-code for the latest information


- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Wall-mounted LED luminaire, comprising:


- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Anti-ageing custom moulded silicone sealing gasket(s)
- Built-in driver
- Microprismatic, toughened, flat glass diffuser, silk-screened on the inside (MIMIK FLAT versions)
- Extra-clear, toughened, flat glass diffuser, silk-screened on the inside (MIMIK models)
- MIMIK models are equipped with high-transmittance polycarbonate optics with different light distributions to meet a large variety of lighting schemes
- Optimised asymmetric distribution for wide spacing and lighting-class levels matching (CP options)
- Stainless steel locking hardware
- Openable and maintainable luminaire (future-proof)

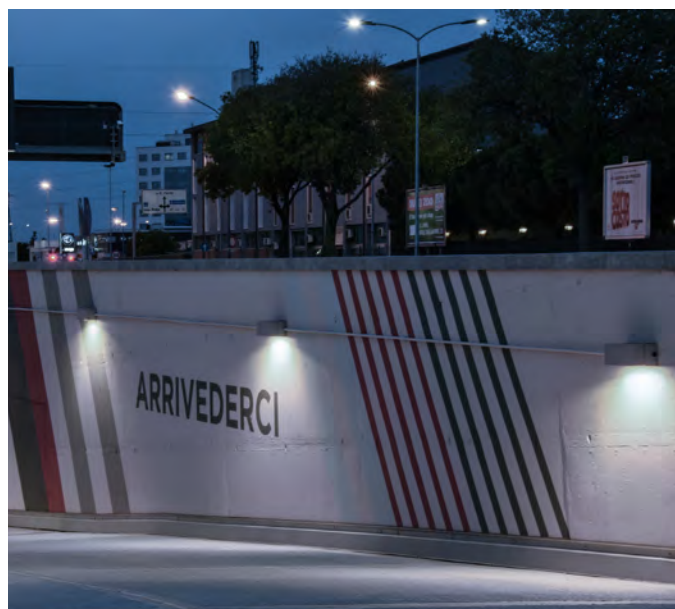


Adigeo Shopping Centre - Verona - Italy




MIMIK 10



MIMIK 10 POST




MIMIK 30
FLAT



MIMIK 30


Identifying and classifying our optics

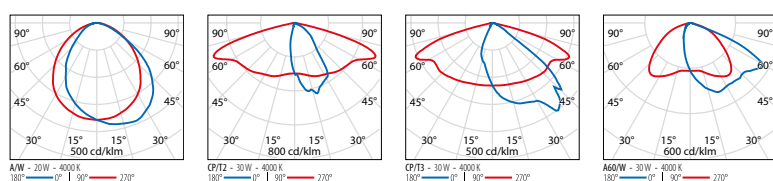

MIMIK 30 FLAT

IP65 - IK06


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
18.5	I	-	80	4000	A/W	-	2736	1803		303798	✓
18.5	I	-	80	3000	A/W	-	2644	1764		303800	✓
18.5	I	-	80	4000	A/W	-	2736	1803		303799	✓
18.5	I	-	80	3000	A/W	-	2644	1764		303801	✓
18.5	I	-	80	4000	A/W	-	2736	1803		303843	✓
18.5	I	-	80	3000	A/W	-	2644	1764		303844	✓



MIMIK 30 CP/T2

IP65 - IK06


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
30	I	✓	70	4000	CP/T2	-	4480	2700		303802	✓
30	I	✓	70	3000	CP/T2	-	4160	2506		303804	✓
30	I	✓	70	4000	CP/T2	-	4480	2700		303803	✓
30	I	✓	70	3000	CP/T2	-	4160	2506		303805	✓
30	I	✓	70	4000	CP/T2	-	4480	2700		303845	✓
30	I	✓	70	3000	CP/T2	-	4160	2506		303846	✓



MIMIK 30 CP/T3

IP65 - IK06


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
30	I	✓	70	4000	CP/T3	-	4480	2755		303806	✓
30	I	✓	70	3000	CP/T3	-	4160	2558		303808	✓
30	I	✓	70	4000	CP/T3	-	4480	2755		303807	✓
30	I	✓	70	3000	CP/T3	-	4160	2558		303809	✓
30	I	✓	70	4000	CP/T3	-	4480	2755		303847	✓
30	I	✓	70	3000	CP/T3	-	4160	2558		303848	✓



MIMIK 30 A60/W


IP65 - IK06

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
30	I	✓	70	4000	A60/W	-	4480	2558		303810	✓
30	I	✓	70	3000	A60/W	-	4160	2373		303812	✓
30	I	✓	70	4000	A60/W	-	4480	2558		303811	✓
30	I	✓	70	3000	A60/W	-	4160	2373		303813	✓
30	I	✓	70	4000	A60/W	-	4480	2558		303849	✓
30	I	✓	70	3000	A60/W	-	4160	2373		303850	✓




Optional accessories


DESCRIPTION	COLOR	PART NUMBER	UKCA
MIMIK FLAT			
FLAT Customising ring / Facade Accessory		310446	✓
FLAT Customising ring / Facade Accessory		310447	✓
FLAT Customising ring / Facade Accessory		310448	✓



310446



310447



310448