



Muse

**A NEW RHYTHM OVER ALL THINGS,
SETTING THE WORLD TO SPIN IN A GRACEFUL DANCE**

A new concept of outdoor lamp, a modular system that offers the possibility of modeling and changing even over time, based on the needs of the user.

Composed of 3 main emission sources: CAPSULE, in anodized aluminum, is proposed as an elegant light source with a modern design which evolves into STILLA, more decorative and easy, and finally SPOT, a projector for more technical installations.

The combination of these three light sources with the various installation accessories offers multiple lighting solutions.

Una nuova concezione di lampada per esterni, un sistema modulare che offre la possibilità di modellarsi e cambiare anche nel tempo sulla base delle esigenze del fruitore.

Composta da 3 fonti emissive principali: CAPSULE, in alluminio anodizzato si propone come una fonte luminosa elegante e dal design moderno per poi evolversi in STILLA, più decorativa e d'atmosfera e per finire SPOT, un proiettore per installazioni più tecniche.


La combinazione di queste tre fonti luminose con i vari accessori per l'installazione offre molteplici soluzioni illuminotecniche.







Muse Stilla Wall



Available finishes:



black

Light Source	mid power led
Supply	24V
Dimmer	PWM
CRI	≥90
Electrical Class	III
IP rating	65
Application	wall
Diffuser	sandblasted glass


Power	24V 1,5Wled
Led Colour temp.	2700/3000K




		lm	black
2700K 1,5Wled	24V	245	902032637
			black
3000K 1,5Wled	24V	255	902012637



Muse Stilla Decò Copper

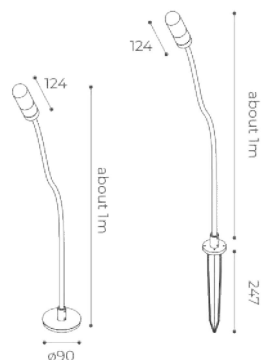

Available finishes:



Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥90
Electrical Class III
IP rating 65
Application floor, ground
Diffuser sandblasted glass

Power 24V 1,5Wled
Led Colour temp. 2700/3000K



			lm	black	bronze
2700K 1,5Wled	24V	with base	245	902032657	902032659
		with spike	245	902031657	902031659
			lm	black	bronze
3000K 1,5Wled	24V	with base	255	902012657	902012659
		with spike	255	902011657	902011659



Muse Stilla Decò Bend-Shape

h500 / h800

Available finishes:



black

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

mid power led

24V / 220-240V

only 24V (PWM)

≥90

II, III

65

floor, ground

sandblasted glass


Power

24V 1,5Wled

220-240V 1,5Wled 1,4We

Led Colour temp.

2700/3000K

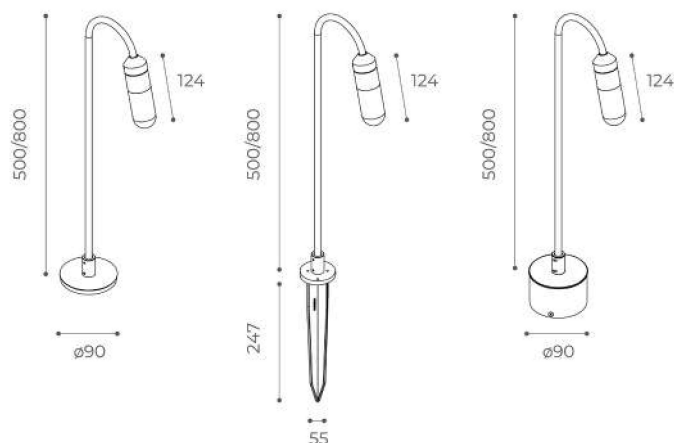

h500

				lm	black
2700K	24V	III	with base	245	902032667
1,5Wled			with spike	245	902032677
1,5We					
1,5Wled	220-240V	II	with base	245	902031667
2,4We					

				lm	black
3000K	24V	III	with base	255	902012667
1,5Wled			with spike	255	902012677
1,5We					
1,5Wled	220-240V	II	with base	255	902011667
2,4We					

h800

				lm	black
2700K	24V	III	with base	245	902032687
1,5Wled			with spike	245	902032697
1,5We					
1,5Wled	220-240V	II	with base	245	902031687
2,4We					

				lm	black
3000K	24V	III	with base	255	902012687
1,5Wled			with spike	255	902012697
1,5We					
1,5Wled	220-240V	II	with base	255	902011687
2,4We					



Muse Stilla Decò Stem

h500 / h800

Available finishes:



black

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

mid power led

24V / 220-240V

only 24V (PWM)

≥90

II, III

65

floor, ground, roof

sandblasted glass




Power

Led Colour temp.

24V 1,5Wled

220-240V 1,5Wled 1,4We

2700/3000K

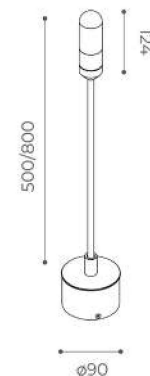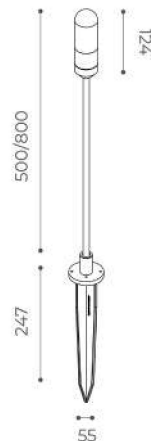

h500

				lm	black
2700K	24V	III	with base	245	902032707
1,5Wled			with spike	245	902032717
1,5We					
1,5Wled	220-240V	II	with base	245	902031707
2,4We					


				lm	black
3000K	24V	III	with base	255	902012707
1,5Wled			with spike	255	902012717
1,5We					
1,5Wled	220-240V	II	with base	255	902011707
2,4We					

h800

				lm	black
2700K	24V	III	with base	245	902032727
1,5Wled			with spike	245	902032737
1,5We					
1,5Wled	220-240V	II	with base	245	902031727
2,4We					


				lm	black
3000K	24V	III	with base	255	902012727
1,5Wled			with spike	255	902012737
1,5We					
1,5Wled	220-240V	II	with base	255	902011727
2,4We					



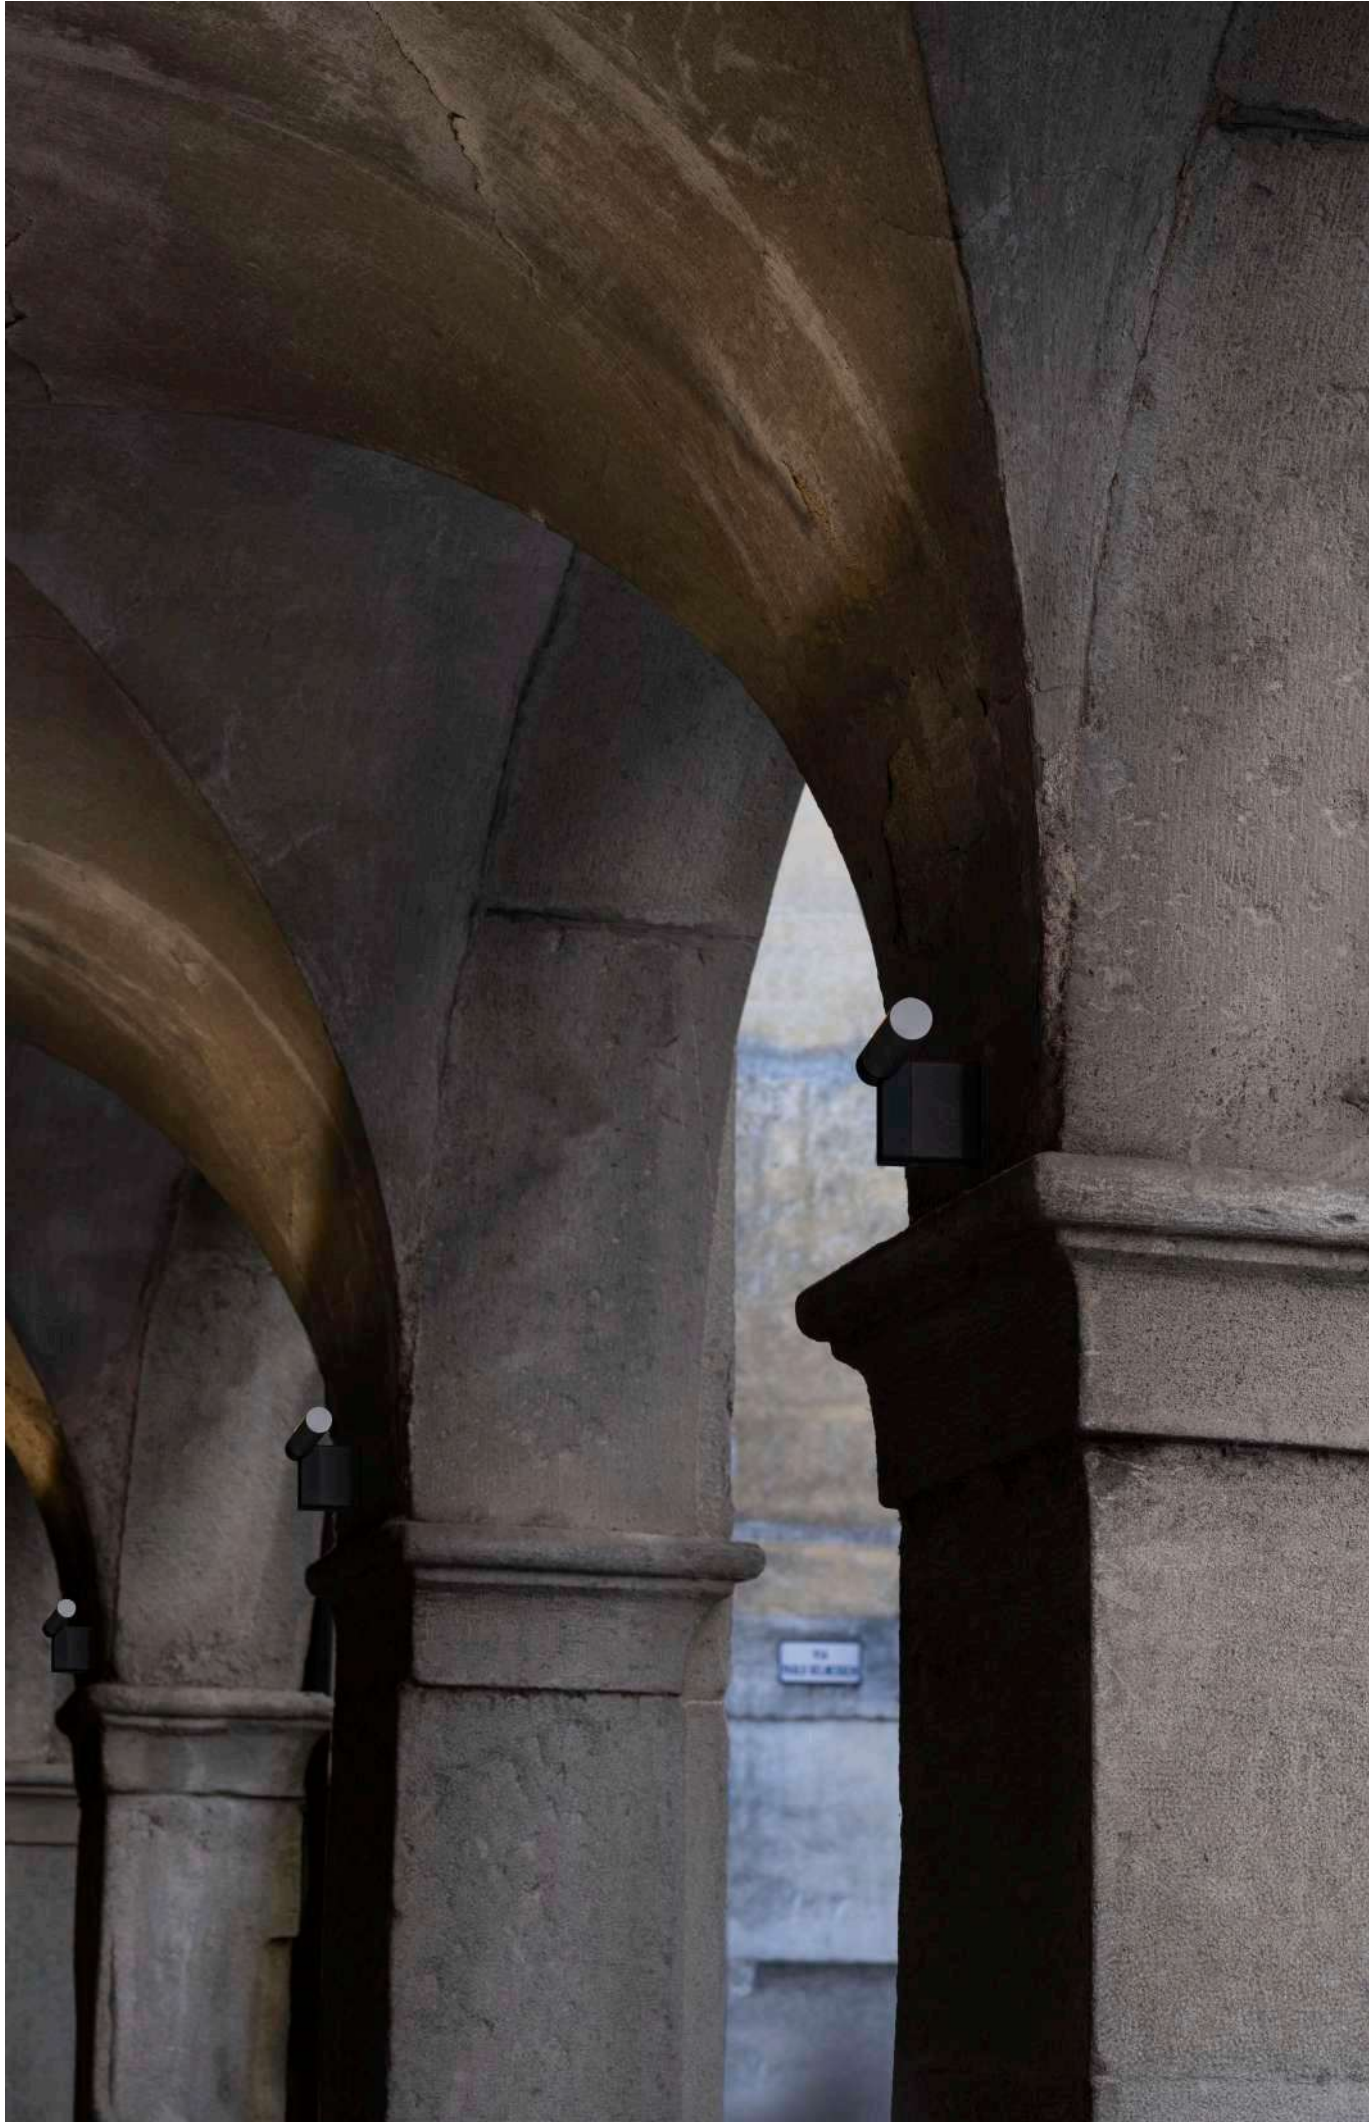


Muse Capsule Wall

mono/double emission



Available finishes:



Light Source mid power led
Supply 24V
Dimmer PWM
CRI ≥80
Electrical Class III
IP rating 65
Application wall
Diffuser polyurethane opal resin

Power 24V 4Wled / 2x4Wled
Led Colour temp. 2700/2800K - 3000/3100K

SUPPORT ONLY:



			lm	black	aluminium	bronze
2700/2800K	24V					
4Wled-4We		mono emission	570	902032747	902032746	902032749
2x4Wled-2x4We		double emission	2x570	902032757	902032756	902032759


			lm	black	aluminium	bronze
3000/3100K	24V					
4Wled-4We		mono emission	600	902012747	902012746	902012749
2x4Wled-2x4We		double emission	2x600	902012757	902012756	902012759

The light colour of this fixture may shift by approximately ±150K due to the protective resin covering the leds.


La tonalità di colore è soggetta ad una variazione di ±150K dovuta all'applicazione di resina protettiva sui led.

Muse Capsule Bollard

h300 / h500 / h800

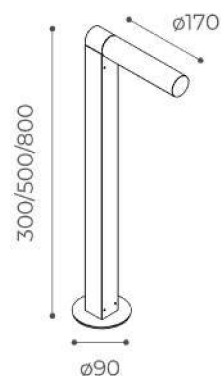

Available finishes:



Light Source mid power led
Supply 24V / 220-240V
Dimmer PWM
CRI ≥80
Electrical Class II, III
IP rating 65
Application ground
Diffuser polyurethane opal resin

Power 24V 4Wled
 220-240 4Wled 5We
Led Colour temp. 2700/2800K - 3000/3100K

SUPPORT ONLY:



h300

			lm	black	aluminium	bronze
2700/2800K						
4Wled-4We	24V	III	570	902032767	902032766	902032769
4Wled 5,2We	220-240V	II	570	902031767	902031766	902031769
			lm	black	aluminium	bronze
3000/3100K						
4Wled-4We	24V	III	600	902012767	902012766	902012769
4Wled 5,2We	220-240V	II	600	902011767	902011766	902011769

h500

			lm	black	aluminium	bronze
2700/2800K						
4Wled-4We	24V	III	570	902032777	902032776	902032779
4Wled 5,2We	220-240V	II	570	902031777	902031776	902031779
			lm	black	aluminium	bronze
3000/3100K						
4Wled-4We	24V	III	600	902012777	902012776	902012779
4Wled 5,2We	220-240V	II	600	902011777	902011776	902011779


h800

			lm	black	aluminium	bronze
2700/2800K						
4Wled-4We	24V	III	570	902032787	902032786	902032789
4Wled 5,2We	220-240V	II	570	902031787	902031786	902031789
			lm	black	aluminium	bronze
3000/3100K						
4Wled-4We	24V	III	600	902012787	902012786	902012789
4Wled 5,2We	220-240V	II	600	902011787	902011786	902011789



Muse Spot 01

small box



Available finishes:



Light Source cob led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application wall, ground, roof
Diffuser transparent tempered glass

Power 12Wled/15We
Led Colour temp. 2700/3000K




		lm			white	sand	aluminium	black
2700K 12Wled 15We	220-240V	▲ 15°		with honeycomb	902031792	902031793	902031795	902031791
		▲ 15°	1237	without honeycomb	902031802	902031803	902031805	902031801
		▲ 26°		with honeycomb	902031812	902031813	902031815	902031811
		▲ 26°	1182	without honeycomb	902031822	902031823	902031825	902031821
		▲ 36°		with honeycomb	902031832	902031833	902031835	902031831
		▲ 36°	1182	without honeycomb	902031842	902031843	902031845	902031841
		▲ 60°	1098	without honeycomb	902031852	902031853	902031855	902031851

		lm			white	sand	aluminium	black
3000K 12Wled 15We	220-240V	▲ 15°		with honeycomb	902011792	902011793	902011795	902013791
		▲ 15°	1288	without honeycomb	902011802	902011803	902011805	902011801
		▲ 26°		with honeycomb	902011812	902011813	902011815	902011811
		▲ 26°	1230	without honeycomb	902011822	902011823	902011825	902011821
		▲ 36°		with honeycomb	902011832	902011833	902011835	902011831
		▲ 36°	1230	without honeycomb	902011842	902011843	902011845	902011841
		▲ 60°	1144	without honeycomb	902011852	902011853	902011855	902011851



Muse Spot 01

big box




Available finishes:



Light Source	cob led
Supply	220-240V
Dimmer	yes
CRI	≥80
Electrical Class	II
IP rating	65
Application	wall, ground, roof
Diffuser	transparent tempered glass

Power	12Wled/15We
Led Colour temp.	2700/3000K




		lm			white	sand	aluminium	black
2700K	220-240V	▲ 15°	1237	with honeycomb	902036792	902036793	902036795	9020367911
12Wled		▲ 15°		without honeycomb	902036802	902036803	902036805	9020368011
15We		▲ 26°	1182	with honeycomb	902036812	902036813	902036815	9020368111
Dali		▲ 26°		without honeycomb	902036822	902036823	902036825	902036811
		▲ 36°	1182	with honeycomb	902036832	902036833	902036835	9020368311
		▲ 36°		without honeycomb	902036842	902036843	902036845	9020368411
		▲ 60°	1098	without honeycomb	902036852	902036853	902036855	9020368511

		lm			white	sand	aluminium	black
3000K	220-240V	▲ 15°	1288	with honeycomb	902016792	902016793	902016795	9020167911
12Wled		▲ 15°		without honeycomb	902016802	902016803	902016805	9020168011
15We		▲ 26°	1230	with honeycomb	902016812	902016813	902016815	9020168111
Dali		▲ 26°		without honeycomb	902016822	902016823	902016825	902016811
		▲ 36°	1230	with honeycomb	902016832	902016833	902016835	9020168311
		▲ 36°		without honeycomb	902016842	902016843	902016845	9020168411
		▲ 60°	1144	without honeycomb	902016852	902016853	902016855	9020168511



Muse Spot 01 Bollard

h300




Available finishes:



Light Source cob led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 12Wled/15We
Led Colour temp. 2700/3000K

SUPPORT ONLY:




			lm		white	sand	aluminium	black
2700K 12Wled 15We	220-240V	▲ 15°		with honeycomb	902031862	902031863	902031865	9020318611
		▲ 15°	1237	without honeycomb	902031872	902031873	902031875	9020318711
		▲ 26°		with honeycomb	902031882	902031883	902031885	9020318811
		▲ 26°	1182	without honeycomb	902031892	902031893	902031895	9020318911
		▲ 36°		with honeycomb	902031902	902031903	902031905	9020319011
		▲ 36°	1182	without honeycomb	902031912	902031913	902031915	9020319111
		▲ 60°	1098	without honeycomb	902031922	902031923	902031925	9020319211

			lm		white	sand	aluminium	black
3000K 12Wled 15We	220-240V	▲ 15°		with honeycomb	902011862	902011863	902011865	9020118611
		▲ 15°	1288	without honeycomb	902011872	902011873	902011875	9020118711
		▲ 26°		with honeycomb	902011882	902011883	902011885	9020118811
		▲ 26°	1230	without honeycomb	902011892	902011893	902011895	9020118911
		▲ 36°		with honeycomb	902011902	902011903	902011905	9020119011
		▲ 36°	1230	without honeycomb	902011912	902011913	902011915	9020119111
		▲ 60°	1144	without honeycomb	902011922	902011923	902011925	9020119211

Muse Spot 01 Bollard

h500

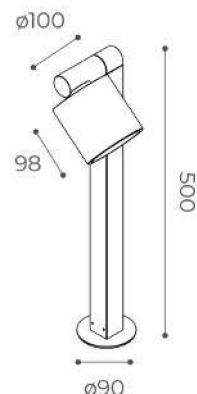


Available finishes:



Light Source cob led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser transparent tempered glass

Power 12Wled/15We
Led Colour temp. 2700/3000K

SUPPORT ONLY:




			lm		white	sand	aluminium	black
2700K	220-240V	▲ 15°		with honeycomb	902031932	902031933	902031935	9020319311
12Wled		▲ 15°	1237	without honeycomb	902031942	902031943	902031945	9020319411
15We		▲ 26°		with honeycomb	902031952	902031953	902031955	9020319511
		▲ 26°	1182	without honeycomb	902031962	902031963	902031965	9020319611
		▲ 36°		with honeycomb	902031972	902031973	902031975	9020319711
		▲ 36°	1182	without honeycomb	902031982	902031983	902031985	9020319811
		▲ 60°	1098	without honeycomb	902031992	902031993	902031995	9020319911

			lm		white	sand	aluminium	black
3000K	220-240V	▲ 15°		with honeycomb	902011932	902011933	902011935	9020119311
12Wled		▲ 15°	1288	without honeycomb	902011942	902011943	902011945	9020119411
15We		▲ 26°		with honeycomb	902011952	902011953	902011955	9020119511
		▲ 26°	1230	without honeycomb	902011962	902011963	902011965	9020119611
		▲ 36°		with honeycomb	902011972	902011973	902011975	9020119711
		▲ 36°	1230	without honeycomb	902011982	902011983	902011985	9020119811
		▲ 60°	1144	without honeycomb	902011992	902011993	902011995	9020119911

Muse Spot 01 Bollard

h800

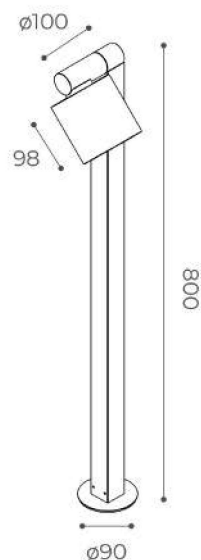

Available finishes:



Light Source cob led
Supply 220-240V
CRI ≥80
Electrical Class II
IP rating 65
Application ground
Diffuser transparent tempered glass


Power 12Wled/15We
Led Colour temp. 2700/3000K

SUPPORT ONLY:



			lm		white	sand	aluminium	black
2700K	220-240V	▲ 15°		with honeycomb	9020311002	9020311003	9020311005	90203110011
12Wled		▲ 15°	1237	without honeycomb	9020311012	9020311013	9020311015	90203110111
15We		▲ 26°		with honeycomb	9020311022	9020311023	9020311025	90203110211
		▲ 26°	1182	without honeycomb	9020311032	9020311033	9020311035	90203110311
		▲ 36°		with honeycomb	9020311042	9020311043	9020311045	90203110411
		▲ 36°	1182	without honeycomb	9020311052	9020311053	9020311055	90203110511
		▲ 60°	1098	without honeycomb	9020311062	9020311063	9020311065	90203110611

			lm		white	sand	aluminium	black
3000K	220-240V	▲ 15°		with honeycomb	9020111002	9020111003	9020111005	90201110011
12Wled		▲ 15°	1288	without honeycomb	9020111012	9020111013	9020111015	90201110111
15We		▲ 26°		with honeycomb	9020111022	9020111023	9020111025	90201110211
		▲ 26°	1230	without honeycomb	9020111032	9020111033	9020111035	90201110311
		▲ 36°		with honeycomb	9020111042	9020111043	9020111045	90201110411
		▲ 36°	1230	without honeycomb	9020111052	9020111053	9020111055	90201110511
		▲ 60°	1144	without honeycomb	9020111062	9020111063	9020111065	90201110611

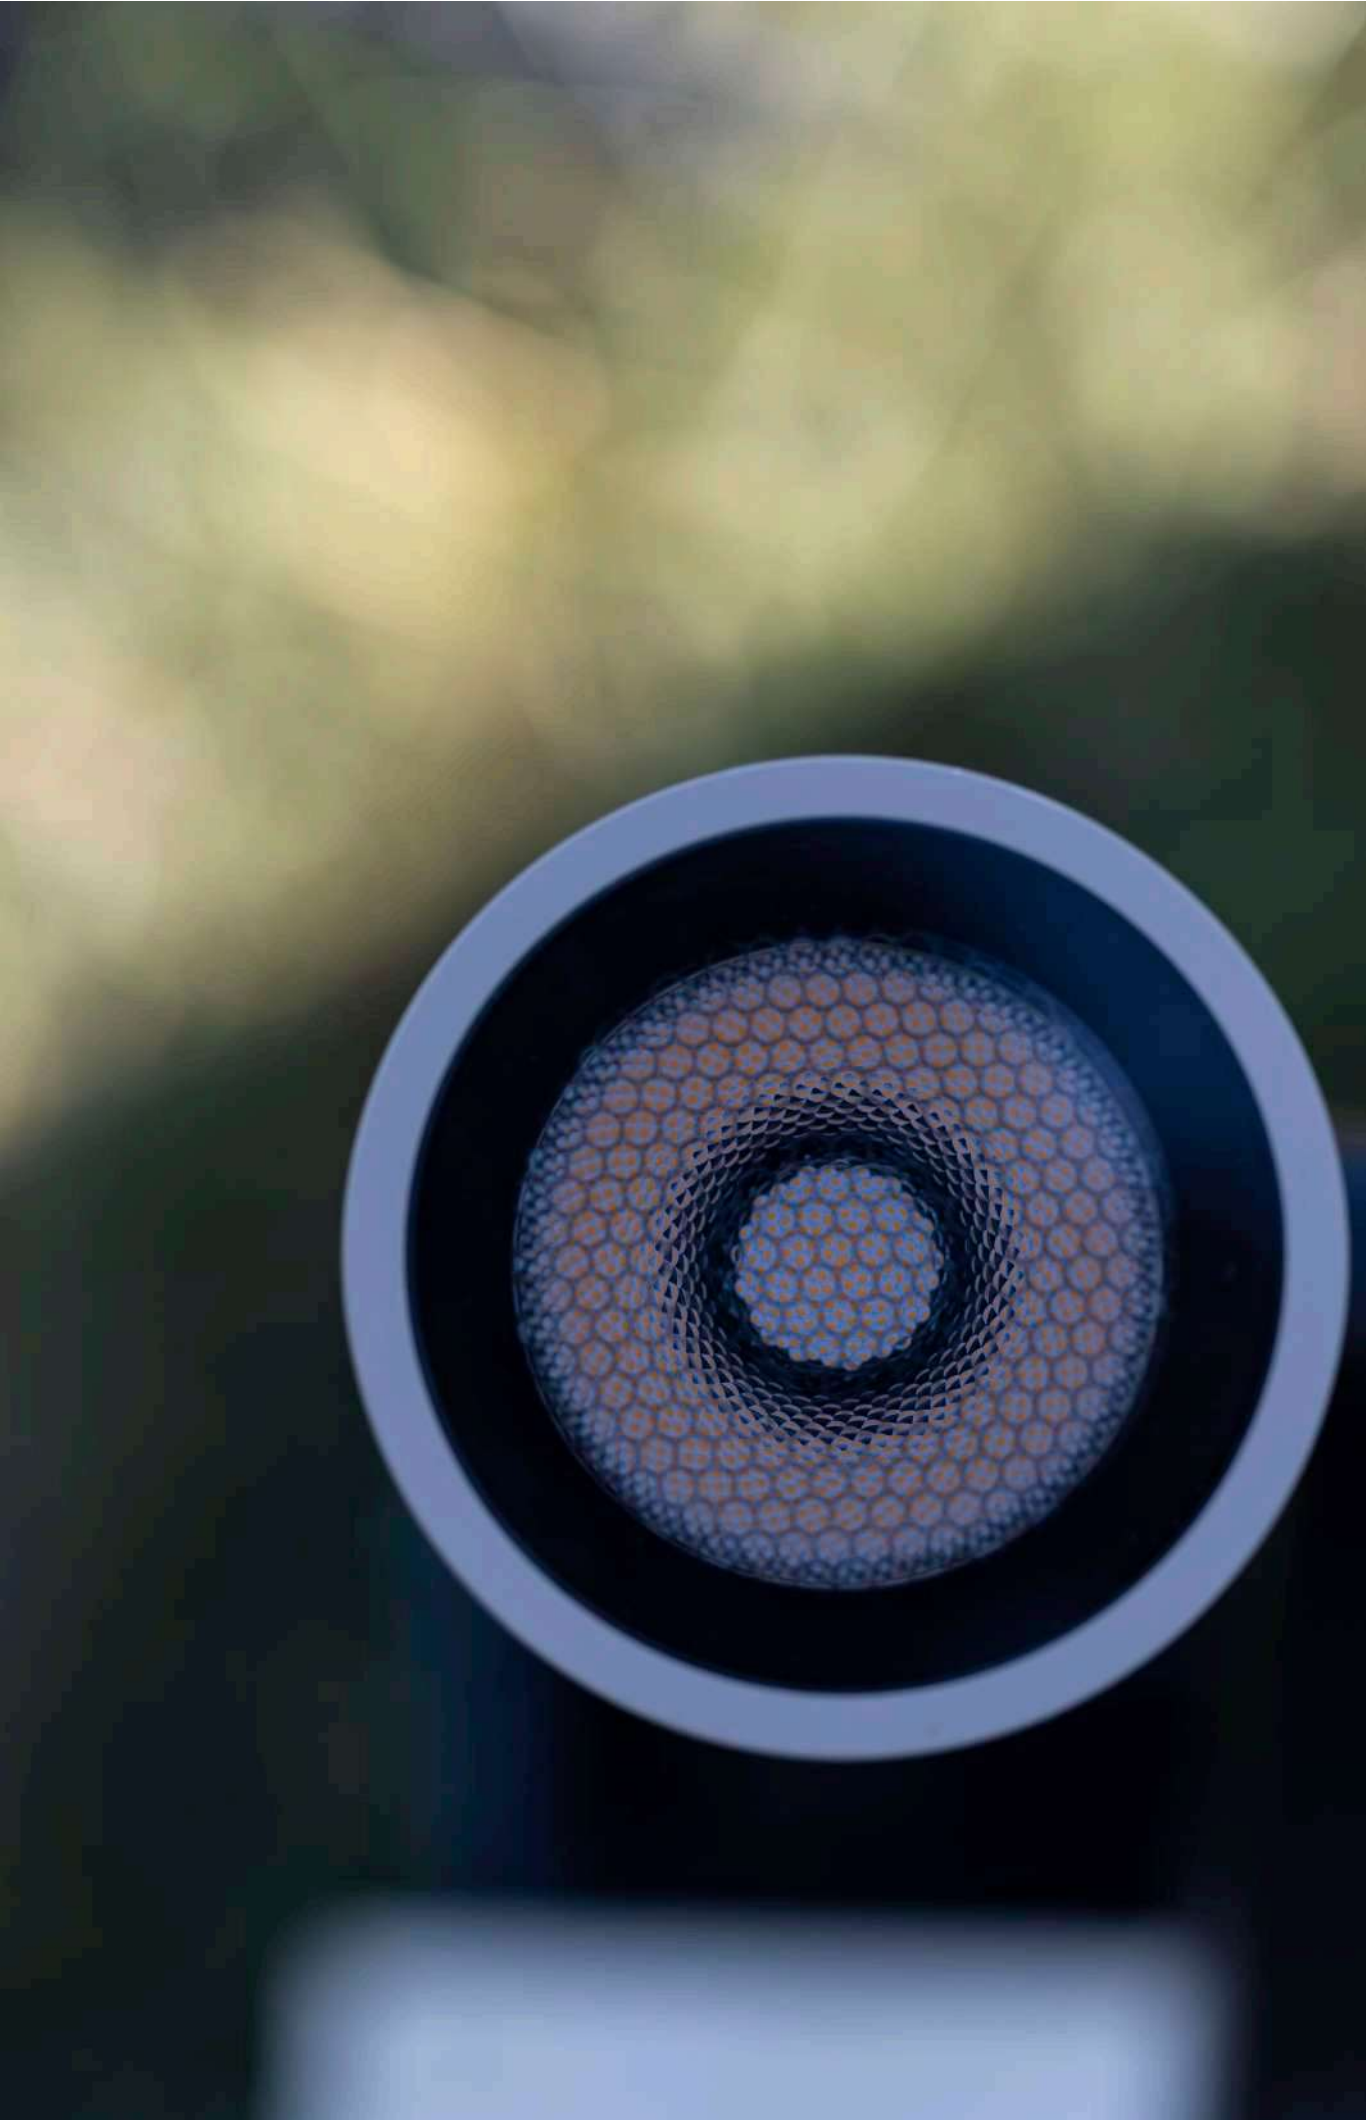






Muse Turn Box

Spot 02



Available finishes:



black

Light Source

Supply

CRI

Electrical Class

IP rating

Application

Diffuser

power led

220-240V

≥80

II

65

wall, ground, roof


transparent tempered glass

Power

Led Colour temp.

220-240V 2Wled - 2,8We

2700/3000K




			lm		black
2700K	220-240V	 18°	98	with honeycomb	9020311111
2Wled		 18°	103	without honeycomb	9020311211
2,8We		 36°	74	with honeycomb	9020311311
		 36°	222	without honeycomb	9020311411
			lm		black
3000K	220-240V	 18°	103	with honeycomb	9020111111
2Wled		 18°	178	without honeycomb	9020111211
2,8We		 36°	78	with honeycomb	9020111311
		 36°	234	without honeycomb	9020111411



Muse Turn Box

Spot 03

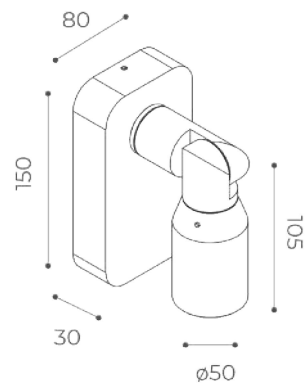

Available finishes:



black

Light Source

power led

Supply

220-240V

CRI

≥80

Electrical Class

II

IP rating

65

Application

wall, ground, roof

Diffuser


transparent tempered glass

Power

220-240V 5,8Wled - 8,6We

Led Colour temp.

2700/3000K



				lm	black
2700K	220-240V	10°	with honeycomb	243	90203110711
5,8Wled		10°	without honeycomb	405	90203110811
8,6We		26°	with honeycomb	251	9020311511
		26°	without honeycomb	432	9020311611
		52°	with honeycomb	135	9020311711
		52°	without honeycomb	409	9020311811

				lm	black
3000K	220-240V	10°	with honeycomb	253	90201110711
5,8Wled		10°	without honeycomb	422	90201110811
8,6We		26°	with honeycomb	264	9020111511
		26°	without honeycomb	455	9020111611
		52°	with honeycomb	142	9020111711
		52°	without honeycomb	431	9020111811








Muse Spot 04

bollard h300



Available finishes:



black

Light Source power led
Supply 24V / 220-240V
Dimmer only 24V (PWM)
CRI ≥80
Electrical Class II, III
IP rating 65
Application ground
Diffuser transparent tempered glass


Power 24V 5,8Wled - 6,3We
 220-240V 5,8Wled - 8,6We
Led Colour temp. 2700/3000K



					lm	black	
2700K 5,8Wled 8,6We	220-240V	II		10°	243	with honeycomb	90203110911
				10°	405	without honeycomb	90203111011
				26°	251	with honeycomb	9020311911
				26°	432	without honeycomb	9020312011
				52°	135	with honeycomb	9020312111
				52°	409	without honeycomb	9020312211
					lm	black	
2700K 5,8Wled 6,3We	24V	III		10°	243	with honeycomb	90203210911
				10°	405	without honeycomb	90203211011
				26°	251	with honeycomb	9020321911
				26°	432	without honeycomb	9020322011
				52°	135	with honeycomb	9020322111
				52°	409	without honeycomb	9020322211
					lm	black	
3000K 5,8Wled 8,6We	220-240V	II		10°	253	with honeycomb	90201110911
				10°	422	without honeycomb	90201111011
				26°	264	with honeycomb	9020111911
				26°	455	without honeycomb	9020112011
				52°	142	with honeycomb	9020112111
				52°	431	without honeycomb	9020112211
					lm	black	
3000K 5,8Wled 6,3We	24V	III		10°	253	with honeycomb	90201210911
				10°	422	without honeycomb	90201211011
				26°	264	with honeycomb	9020121911
				26°	455	without honeycomb	9020122011
				52°	142	with honeycomb	9020122111
				52°	431	without honeycomb	9020122211

Muse Spot 04

bollard h500

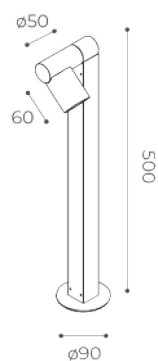

Available finishes:



black

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

power led

24V / 220-240V

only 24V (PWM)

≥80

II, III

65

ground

transparent tempered glass

Power

24V 5,8Wled - 6,3We

220-240V 5,8Wled - 8,6We

Led Colour temp.


2700/3000K



				lm	black	
2700K 5,8Wled 8,6We	220-240V	II	10°	243	with honeycomb	9020311111
			10°	405	without honeycomb	9020311121
			26°	251	with honeycomb	9020312311
			26°	432	without honeycomb	9020312411
			52°	135	with honeycomb	9020312511
			52°	409	without honeycomb	9020312611
				lm	black	
2700K 5,8Wled 6,3We	24V	III	10°	243	with honeycomb	9020321111
			10°	405	without honeycomb	9020321121
			26°	251	with honeycomb	9020322311
			26°	432	without honeycomb	9020322411
			52°	135	with honeycomb	9020322511
			52°	409	without honeycomb	9020322611
				lm	black	
3000K 5,8Wled 8,6We	220-240V	II	10°	253	with honeycomb	9020111111
			10°	422	without honeycomb	9020111121
			26°	264	with honeycomb	9020112311
			26°	455	without honeycomb	9020112411
			52°	142	with honeycomb	9020112511
			52°	431	without honeycomb	9020112611
				lm	black	
3000K 5,8Wled 6,3We	24V	III	10°	253	with honeycomb	9020121111
			10°	422	without honeycomb	9020121121
			26°	264	with honeycomb	9020122311
			26°	455	without honeycomb	9020122411
			52°	142	with honeycomb	9020122511
			52°	431	without honeycomb	9020122611

Muse Spot 04

bollard h800

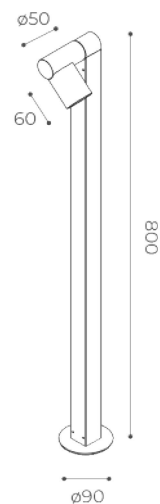

Available finishes:



black

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

power led

24V / 220-240V

only 24V (PWM)

≥80

II, III

65

ground

transparent tempered glass

Power

24V 5,8Wled - 6,3We

220-240V 5,8Wled - 8,6We

Led Colour temp.

2700/3000K



				lm	black	
2700K 5,8Wled 8,6We	220-240V	II	10°	243	with honeycomb	90203111311
			10°	405	without honeycomb	90203111411
			26°	251	with honeycomb	9020312711
			26°	432	without honeycomb	9020312811
			52°	135	with honeycomb	9020312911
			52°	409	without honeycomb	9020313011

				lm	black	
2700K 5,8Wled 6,3We	24V	III	10°	243	with honeycomb	90203211311
			10°	405	without honeycomb	90203211411
			26°	251	with honeycomb	9020322711
			26°	432	without honeycomb	9020322811
			52°	135	with honeycomb	9020322911
			52°	409	without honeycomb	9020323011

				lm	black	
3000K 5,8Wled 8,6We	220-240V	II	10°	253	with honeycomb	90201111311
			10°	422	without honeycomb	90201111411
			26°	264	with honeycomb	9020112711
			26°	455	without honeycomb	9020112811
			52°	142	with honeycomb	9020112911
			52°	431	without honeycomb	9020113011


				lm	black	
3000K 5,8Wled 6,3We	24V	III	10°	253	with honeycomb	90201211311
			10°	422	without honeycomb	90201211411
			26°	264	with honeycomb	9020122711
			26°	455	without honeycomb	9020122811
			52°	142	with honeycomb	9020122911
			52°	431	without honeycomb	9020123011





Muse Spot 02 Bend-Shape Stem

h500

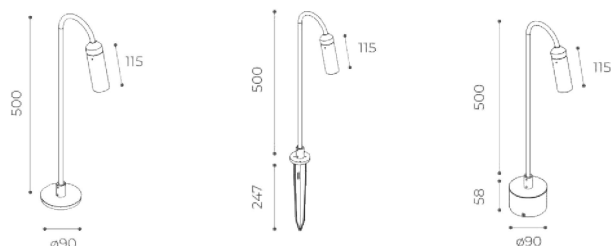

Available finishes:



black

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

power led

24V / 220-240V

only 24V (PWM)

≥80

II, III

65

ground

transparent tempered glass

Power

Led Colour temp.

24V 2Wled- 3We

220-240V 2Wled - 2,8We

2700/3000K



WITH BASE

WITH BASE				lm	black	
2700K	24V	III	 18°	98	with honeycomb	9020323111
2Wled			 18°	169	without honeycomb	9020323211
3We			 36°	75	with honeycomb	9020323511
			 36°	224	without honeycomb	9020323611

				lm	black	
2700K	220-240V	II	 18°	98	with honeycomb	9020313111
2Wled			 18°	169	without honeycomb	9020313211
2,8We			 36°	75	with honeycomb	9020313511
			 36°	224	without honeycomb	9020313611

				lm	black	
3000K	24V	III	 18°	103	with honeycomb	9020123111
2Wled			 18°	178	without honeycomb	9020123211
3We			 36°	79	with honeycomb	9020123511
			 36°	236	without honeycomb	9020123611

				lm	black	
3000K	220-240V	II	 18°	103	with honeycomb	9020113111
2Wled			 18°	178	without honeycomb	9020113211
2,8We			 36°	79	with honeycomb	9020113511
			 36°	236	without honeycomb	9020113611


WITH SPIKE

WITH SPIKE				lm	black	
2700K	24V	III	18°	98	with honeycomb	9020323311
2Wled			18°	169	without honeycomb	9020323411
3We			 36°	75	with honeycomb	9020323711
			 36°	224	without honeycomb	9020323811

					lm	black	
3000K	24V	III		18°	103	with honeycomb	9020123311
2Wled				18°	178	without honeycomb	9020123411
3We				36°	79	with honeycomb	9020123711
				36°	236	without honeycomb	9020123811

Muse Spot 02 Bend-Shape Stem

h800

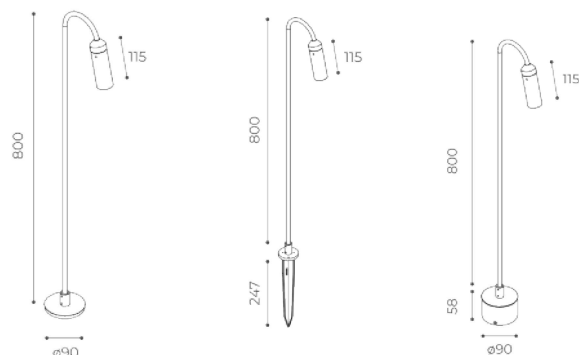

Available finishes:



black

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

power led

24V / 220-240V

only 24V (PWM)

≥80

II, III

65

ground

transparent tempered glass

Power

24V 2Wled- 3We

220-240V 2Wled - We

Led Colour temp.

2700/3000K



WITH BASE

					lm		black
2700K	24V	III	▲	18°	98	with honeycomb	9020323911
2Wled			▲	18°	169	without honeycomb	9020324011
3We			▲	36°	75	with honeycomb	9020324311
			▲	36°	224	without honeycomb	9020324411

					lm		black
2700K	220-240V	II	▲	18°	98	with honeycomb	9020313911
2Wled			▲	18°	169	without honeycomb	9020314011
2,8We			▲	36°	75	with honeycomb	9020314311
			▲	36°	224	without honeycomb	9020314411

					lm		black
3000K	24V	III	▲	18°	103	with honeycomb	9020123911
2Wled			▲	18°	178	without honeycomb	9020124011
3We			▲	36°	79	with honeycomb	9020124311
			▲	36°	236	without honeycomb	9020124411

					lm		black
3000K	220-240V	II	▲	18°	103	with honeycomb	9020113911
2Wled			▲	18°	178	without honeycomb	9020114011
2,8We			▲	36°	79	with honeycomb	9020114311
			▲	36°	236	without honeycomb	9020114411


WITH SPIKE

					lm		black
2700K	24V	III	▲	18°	98	with honeycomb	9020324111
2Wled			▲	18°	169	without honeycomb	9020324211
3We			▲	36°	75	with honeycomb	9020324511
			▲	36°	224	without honeycomb	9020324611

					lm		black
3000K	24V	III	▲	18°	103	with honeycomb	9020124111
2Wled			▲	18°	178	without honeycomb	9020124211
3We			▲	36°	79	with honeycomb	9020124511
			▲	36°	236	without honeycomb	9020124611

Muse Spot 03 Bend-Shape Stem

h500

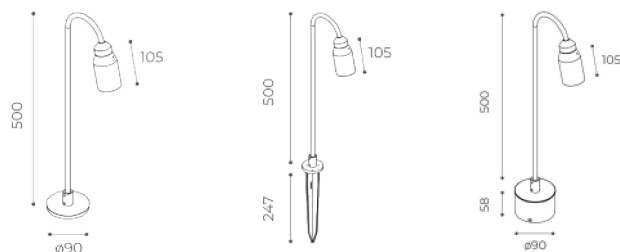

Available finishes:



black

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

power led

24V / 220-240V

only 24V (PWM)

≥80

II, III

65

ground

transparent tempered glass

Power

24V 5,8Wled- 6,3We

220-240V 5,8Wled - 8,6We

Led Colour temp.

2700/3000K



WITH BASE


WITH BASE				lm		black
2700K 5,8Wled 6,3We	24V	III	 10°	243	with honeycomb	90203211511
			 10°	405	without honeycomb	90203211611
			 26°	251	with honeycomb	9020324711
			 26°	432	without honeycomb	9020324811
			 52°	135	with honeycomb	9020325111
			 52°	409	without honeycomb	9020325211
2700K 5,8Wled 6,3We	220-240V	II	 10°	243	with honeycomb	90203111511
			 10°	405	without honeycomb	90203111611
			 26°	251	with honeycomb	9020314711
			 26°	432	without honeycomb	9020314811
			 52°	135	with honeycomb	9020315111
			 52°	409	without honeycomb	9020315211
3000K 5,8Wled 6,3We	24V	III	 10°	253	with honeycomb	90201211511
			 10°	422	without honeycomb	90201211611
			 26°	264	with honeycomb	9020124711
			 26°	455	without honeycomb	9020124811
			 52°	142	with honeycomb	9020125111
			 52°	431	without honeycomb	9020125211
3000K 5,8Wled 6,3We	220-240V	II	 10°	253	with honeycomb	90201111511
			 10°	422	without honeycomb	90201111611
			 26°	264	with honeycomb	9020114711
			 26°	455	without honeycomb	9020114811
			 52°	142	with honeycomb	9020115111
			 52°	431	without honeycomb	9020115211

WITH SPIKE

WITH SPIRE				lm	black	
2700K 5,8Wled 6,3We	24V	III	 10°	243	with honeycomb	90203211711
			 10°	405	without honeycomb	90203211811
			 26°	251	with honeycomb	9020324911
			 26°	432	without honeycomb	9020325011
			 52°	135	with honeycomb	9020325311
			 52°	409	without honeycomb	9020325411
3000K 5,8Wled 6,3We	24V	II	 10°	253	with honeycomb	90201211711
			 10°	422	without honeycomb	90201211811
			 26°	264	with honeycomb	9020124911
			 26°	455	without honeycomb	9020125011
			 52°	142	with honeycomb	9020125311
			 52°	431	without honeycomb	9020125411

Muse Spot 03 Bend-Shape Stem

h800

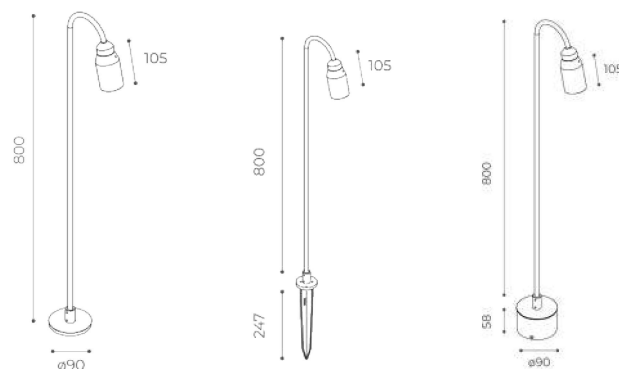

Available finishes:



black

Light Source

Supply

Dimmer

CRI

Electrical Class

IP rating

Application

Diffuser

power led

24V / 220-240V

only 24V (PWM)

≥80

II, III

65

ground

transparent tempered glass

Power

24V 5,8Wled- 6,3We

220-240V 5,8Wled - 8,6We

Led Colour temp.

2700/3000K



WITH BASE


WITH BASE				lm	black	
2700K 5,8Wled 6,3We	24V	III	 10°	243	with honeycomb	90203211911
			 10°	405	without honeycomb	90203212011
			 26°	251	with honeycomb	9020325511
			 26°	432	without honeycomb	9020325611
			 52°	135	with honeycomb	9020325911
			 52°	409	without honeycomb	9020326011
2700K 5,8Wled 6,3We	220-240V	II	 10°	243	with honeycomb	90203111911
			 10°	405	without honeycomb	90203112011
			 26°	251	with honeycomb	9020315511
			 26°	432	without honeycomb	9020315611
			 52°	135	with honeycomb	9020315911
			 52°	409	without honeycomb	9020316011
3000K 5,8Wled 6,3We	24V	III	 10°	253	with honeycomb	90201211911
			 10°	422	without honeycomb	90201212011
			 26°	264	with honeycomb	9020125511
			 26°	455	without honeycomb	9020125611
			 52°	142	with honeycomb	9020125911
			 52°	431	without honeycomb	9020126011
3000K 5,8Wled 6,3We	220-240V	II	 10°	253	with honeycomb	90201111911
			 10°	422	without honeycomb	90201112011
			 26°	264	with honeycomb	9020115511
			 26°	455	without honeycomb	9020115611
			 52°	142	with honeycomb	9020115911
			 52°	431	without honeycomb	9020116011

WITH SPIKE

WITH SPIRE				lm		black
2700K 5,8Wled 6,3We	24V	III	 10°	243	with honeycomb	90203212111
			 10°	405	without honeycomb	90203212211
			 26°	251	with honeycomb	9020315711
			 26°	432	without honeycomb	9020325811
			 52°	135	with honeycomb	9020326111
			 52°	409	without honeycomb	9020326211
3000K 5,8Wled 6,3We	24V	III	 10°	253	with honeycomb	90201212111
			 10°	422	without honeycomb	90201212211
			 26°	264	with honeycomb	9020125711
			 26°	455	without honeycomb	9020125811
			 52°	142	with honeycomb	9020126111
			 52°	431	without honeycomb	9020126211




ACCESSORIES




Power supply 8V 110-2240V IP54
44x46x26mm

code **9037**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




Power supply 24V 16Watt IP20
118x52x26mm

code **9006**




Power supply 24V DC 150W IP67
267x79x52mm

code **9057**




Power supply 24V 20Watt IP20
103x67x21mm

code **9007**



Anchor bolts
Ø88x165mm

code **9062**



Power supply 24V 50Watt IP20
190x60x36mm

code **9008**

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9049 / 9057 / 9062**