



QUASAR 30

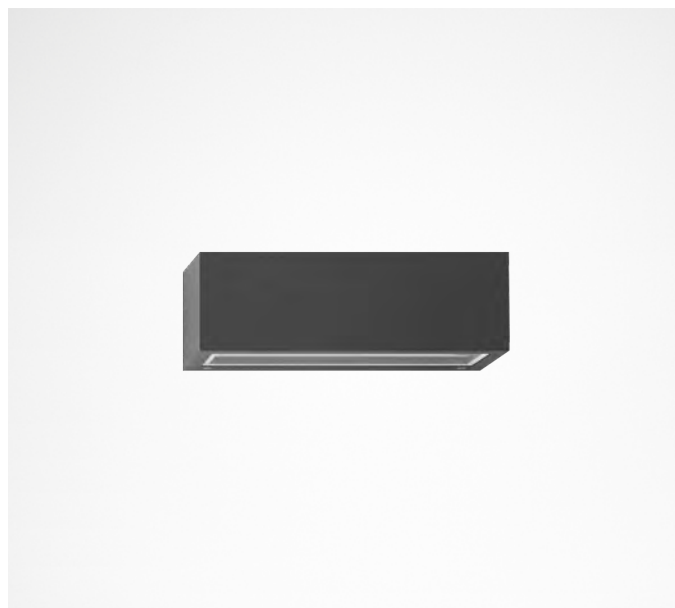

Scan the QR-code for
the latest information


- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured

Wall-mounted LED luminaire, comprising:


- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Toughened flat glass diffuser, internally coated, for homogeneous light distribution
- Microprismatic, toughened, flat glass diffuser, silk-screened on the inside (TECH versions)
- Satin finish pure aluminium reflector (Al 99.98)
- Built-in driver
- Anti-ageing custom moulded silicone sealing gasket(s)
- EM/3P LED versions feature an additional LED that is used for emergency lighting
- EM/3P version is designed for multipurpose 3 hours sustained emergency lighting
- EM/3P LED versions are equipped with 3.6V 2Ah, Ni MH batteries
- Openable and maintainable luminaire (future-proof)
- Versions with dimmable 1-10 V or DALI drivers available. Consult factory




Hotel Bergmanns alm beer house - Reden - Germany




M / B



TECH / DOUBLE TECH



QUASAR 30 CEILING




QUASAR 30

QUASAR 30 M

IP65 - IK06


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
20	I	✓	80	4000	S/EW	-	2712	995		303559	✓
20	I	✓	80	3000	S/EW	-	2584	936		303560	✓
20	I	✓	80	4000	S/EW	-	2712	995		303557	✓
20	I	✓	80	3000	S/EW	-	2584	936		303558	✓
20	I	✓	80	4000	S/EW	-	2712	995		303555	✓
20	I	✓	80	3000	S/EW	-	2584	936		303556	✓



QUASAR 30 TECH

IP65 - IK07

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
20	I	✓	80	4000	A30/M	30°	2712	1606		303553	✓
20	I	✓	80	3000	A30/M	30°	2584	1557		303554	✓
20	I	✓	80	4000	A30/M	30°	2712	1606		303551	✓
20	I	✓	80	3000	A30/M	30°	2584	1557		303552	✓
20	I	✓	80	3000	A30/M	30°	2584	1557		30355290105	✓
20	I	✓	80	4000	A30/M	30°	2712	1606		303549	✓
20	I	✓	80	3000	A30/M	30°	2584	1557		303550	✓



QUASAR 30 B

IP65 - IK06


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
32	I	✓	80	4000	S/EW	-	4800	1148		303565	✓
32	I	✓	80	3000	S/EW	-	4572	1532		303566	✓
32	I	✓	80	4000	S/EW	-	4800	1615		303563	✓
32	I	✓	80	3000	S/EW	-	4572	1532		303564	✓
32	I	✓	80	4000	S/EW	-	4800	1615		303561	✓
32	I	✓	80	3000	S/EW	-	4572	1532		303562	✓



QUASAR 30 DOUBLE TECH

IP65 - IK07

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
32	I	✓	80	4000	A30/M	-	4800	2489		304106	✓
32	I	✓	80	3000	A30/M	-	4572	2427		304103	✓
32	I	✓	80	4000	A30/M	-	4800	2489		304107	✓
32	I	✓	80	3000	A30/M	-	4572	2427		304104	✓
32	I	✓	80	3000	A30/M	-	4572	2427		30410490102	✓
32	I	✓	80	4000	A30/M	-	4800	2489		304105	✓
32	I	✓	80	3000	A30/M	-	4572	2427		304102	✓



QUASAR 30 TECH EM/3P

IP65 - IK07

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - Emergency 3h - 220-240 V 50/60 Hz											
20	I	-	80	4000	A30/M	-	2712	1606		304346	✓
20	I	-	80	3000	A30/M	-	2584	1557		304345	✓
20	I	-	80	4000	A30/M	-	2712	1606		304197	✓
20	I	-	80	3000	A30/M	-	2584	1557		304196	✓
20	I	-	80	4000	A30/M	-	2712	1606		304348	✓
20	I	-	80	3000	A30/M	-	2584	1557		304347	✓

