

STILO

Bollard da esterno adatto per installazione a terreno/pavimento per l'illuminazione di percorsi pedonali, aree carrabili e spazi verdi. Corpo testa palo in alluminio pressofuso e struttura paletto in alluminio estruso ad elevata resistenza all'ossidazione, verniciati con polveri termoindurenti poliestere anticorrosione, colore bianco, grigio, corten ed antracite. Disponibile in due tipologie di ottiche con lenti in PMMA ad alto rendimento di flusso, antiabbagliamento ed antiriflesso e riflettore in alluminio satinato: ottica monoemissione asimmetrica 45° con distribuzione luminosa a 120° ed ottica biemissione asimmetrica 45° con distribuzione luminosa a 120°.

Outdoor Bollard suitable for ground/floor installation for lighting pedestrian paths, driveways and green spaces. Die-cast aluminum pole head body and extruded aluminum pole structure with high resistance to oxidation, painted with anti-corrosion polyester thermosetting powders, color white, gray, corten and anthracite. Available in two types of optics with high flux efficiency, anti-glare and anti-reflective PMMA lenses and satin aluminum reflector: 45° asymmetrical single-emission optics with 120° light distribution and 45° asymmetrical bi-emission optics with 120° light distribution

CARATTERISTICHE / MAIN FEATURES



Class 1



CE



IP 66



IK 08



7 WARRANTY



CRI >80



L80-B50
75.000h



Mac Adams 3



RG0
RG1



Bordo
Mare



Prewired



Bianco
White



Grigio
Grey



Corten



Antracite
Anthracite



CODIFICA CODICE / CODING

Art.	+	Mod.	+	°K (CRI)	+	W. tot.	+	Options	Options
7024		AM		27 = 2700°K (CRI >80) *		5		B1 = 500 mm ○ Bianco opaco	C1 = 500 mm ● Corten
		AB		30 = 3000°K (CRI >80)		10		B2 = 1000 mm ○ Bianco opaco	C2 = 1000 mm ● Corten
				40 = 4000°K (CRI >80)		15		B3 = 1500 mm ○ Bianco opaco	C3 = 1500 mm ● Corten
						20		G1 = 500 mm ○ Grigio opaco	N1 = 500 mm ● Antracite
						30		G2 = 1000 mm ○ Grigio opaco	N2 = 1000 mm ● Antracite
								G3 = 1500 mm ○ Grigio opaco	N3 = 1500 mm ● Antracite

* disponibilità su richiesta / * available on request

Δ LUMEN

	°K	CRI	% Lm
27	2700	> 80	-5,30%
30	3000	> 80	-0,80%
40	4000	> 80	standard

DOTAZIONE / STANDARD EQUIPMENT

- Cavo in neoprene H05RN-F 3x1mm² precablato lunghezza 1000 mm.	- 1000 mm long H05RN-F 3x1mm² neoprene cable.
- Valvola osmotica anticondensa integrata.	- Anti-condensation osmotic valve.
- Alimentazione diretta AC con dimmerazione a taglio di fase.	- AC direct led board with phase cut dimming.

ACCESSORI / ACCESSORIES



ACC221



ACC241



ACC339

ACC221 Connettore a T per cablaggio passante IP68. Connessione a 5 poli.
5-poles IP68 T-connector for through wiring.

ACC241 Dimmer universale con uscita a taglio di fase 230Vac.
Universal dimmer with 230Vac phase cut output.

ACC339 Dima, tirafondi e viteria per fissaggio del basamento al terreno
Template, tie rods and screws for ground base fixing.

INSTALLAZIONE / INSTALLATION

Apparecchio adatto per installazione a terra.

Floor installation.



Mod. AM

Ottica

Ottica a monoemissione asimmetrica 45° in con distribuzione luminosa a 120°, con lenti in PMMA ad alto rendimento di flusso, antiabbagliamento ed antiriflesso. Diffusore in vetro piano temperato extrachiaro spessore 4 mm.

Corpo

Corpo testa palo in alluminio pressofuso anticorrosione e struttura paletto in alluminio estruso ad elevata resistenza all'ossidazione, verniciati con polveri termoindurenti poliestere anticorrosione, colore bianco, grigio, corten ed antracite.

Optic



45° asymmetric single-emission optics in with 120° light distribution, with PMMA lenses with high flux efficiency, anti-glare and anti-reflection. Extra-clear tempered flat glass diffuser 4 mm thick.

Body

Anti-corrosion die-cast aluminum pole head body and extruded aluminum pole structure with high oxidation resistance, painted with anti-corrosion polyester thermosetting powders, color white, gray, corten and anthracite.

ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF
E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

Code	W	°K	CRI	Lm OUTPUT	LxPxH (mm)	Col.
7024AM4005B1	5	4000	≥80	581	95 x 165 x 500	○
7024AM4010B1	10	4000	≥80	1163	95 x 165 x 500	○
7024AM4015B1	15	4000	≥80	1744	95 x 165 x 500	○
7024AM4005B2	5	4000	≥80	581	95 x 165 x 1000	○
7024AM4010B2	10	4000	≥80	1163	95 x 165 x 1000	○
7024AM4015B2	15	4000	≥80	1744	95 x 165 x 1000	○
7024AM4005B3	5	4000	≥80	581	95 x 165 x 1500	○
7024AM4010B3	10	4000	≥80	1163	95 x 165 x 1500	○
7024AM4015B3	15	4000	≥80	1744	95 x 165 x 1500	○

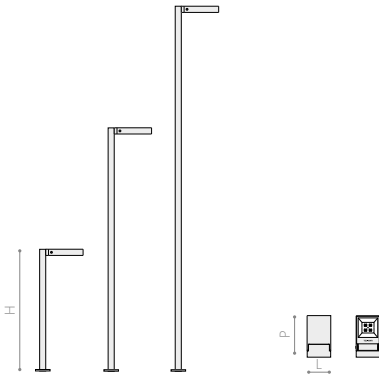

ARCH. ESTERNO

Mod. AB

Ottica

Ottica a biemissione asimmetrica 45° in con distribuzione luminosa a 120°, con lenti in PMMA ad alto rendimento di flusso, antiabbagliamento ed antiriflesso. Diffusore in vetro piano temperato extrachiaro spessore 4 mm.

Corpo

Corpo testa palo in alluminio pressofuso anticorrosione e struttura paletto in alluminio estruso ad elevata resistenza all'ossidazione, verniciati con polveri termoindurenti poliestere anticorrosione, colore bianco, grigio, corten ed antracite.

Optic

45° asymmetrical bi-emission optics in with 120° light distribution, with high flux efficiency, anti-glare and anti-reflection PMMA lenses. Extra-clear tempered flat glass diffuser 4 mm thick.

Body

Anti-corrosion die-cast aluminum pole head body and extruded aluminum pole structure with high oxidation resistance, painted with anti-corrosion polyester thermosetting powders, color white, gray, corten and anthracite.

ESEMPIO CODIFICA CODICE 4000K - CRI>80 - ON/OFF
E.G. ARTICLE REFERENCE 4000K - CRI>80 - ON/OFF

Code	W	°K	CRI	Lm OUTPUT	LxPxH (mm)	Col.
7024AB4010B1	10	4000	≥80	1163	95 x 305 x 500	○
7024AB4020B1	20	4000	≥80	2325	95 x 305 x 500	○
7024AB4030B1	30	4000	≥80	3487	95 x 305 x 500	○
7024AB4010B2	10	4000	≥80	1163	95 x 305 x 1000	○
7024AB4020B2	20	4000	≥80	2325	95 x 305 x 1000	○
7024AB4030B2	30	4000	≥80	3487	95 x 305 x 1000	○
7024AB4010B3	10	4000	≥80	1163	95 x 305 x 1500	○
7024AB4020B3	20	4000	≥80	2325	95 x 305 x 1500	○
7024AB4030B3	30	4000	≥80	3487	95 x 305 x 1500	○

