


NORMA+



Scan the QR-code for the latest information


■ GR-RAL7035 / Grey RAL7035 / Matt

Weatherproof LED luminaire, comprising:

- UV stabilised co-extruded polycarbonate body with double finish; satin-finish for the optical compartment and matte finish for the auxiliary electrical compartment
- Technopolpolymer end caps
- Anti-ageing custom moulded silicone sealing gasket(s)
- Tool-less bayonet opening polycarbonate cap for mains connection
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Aluminium heat sink
- Stainless steel springs for quick installation
- The CL (Continuous Line) versions are suitable for through wiring continuous line installations (5x2,5 mm²)
- EM versions are complete with emergency device that can operate on battery for 1 hour. Product can be used for general or emergency lighting



ABI BV production facilities- Haarlem - Netherlands

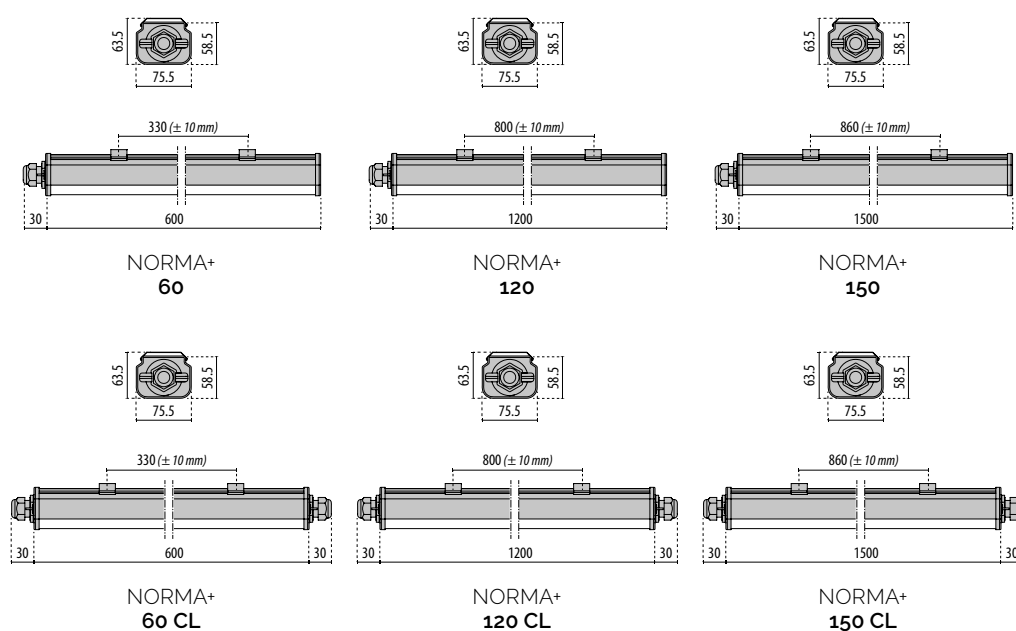

NORMA+ 60

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	LENGTH [mm]	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz												
23	I	-	80	4000	S/EW	-	4662	3300	■	630	305949	✓
16	I	-	80	4000	S/EW	-	3261	2836	■	630	305948	✓



NORMA+ 60 CL

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	LENGTH [mm]	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz												
23	I	-	80	4000	S/EW	-	4662	3300	■	660	305941	✓
16	I	-	80	4000	S/EW	-	3261	2836	■	660	305940	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz												
23	I	-	80	4000	S/EW	-	4662	3300	■	660	305989	✓
16	I	-	80	4000	S/EW	-	3261	2836	■	660	305988	✓



NORMA+ 120

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	LENGTH [mm]	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz												
34	I	-	80	4000	S/EW	-	6153	5215	■	1230	305952	✓
25	I	-	80	4000	S/EW	-	3775	3002	■	1230	305950	✓
25	I	-	80	4000	S/EW	-	4315	3753	■	1230	305951	✓

PRO versions are available on web



NORMA+ 120 CL

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	LENGTH [mm]	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz												
34	I	-	80	4000	S/EW	-	5996	5215	■	1260	305944	✓
25	I	-	80	4000	S/EW	-	3775	3002	■	1260	305942	✓
25	I	-	80	4000	S/EW	-	4315	3752	■	1260	305943	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz												
34	I	-	80	4000	S/EW	-	6153	5215	■	1260	305992	✓
25	I	-	80	4000	S/EW	-	3775	3002	■	1260	305990	✓
25	I	-	80	4000	S/EW	-	4428	3752	■	1260	305991	✓
Power LED - emergency 1h - 220-240 V 50/60 Hz												
34	I	-	80	4000	S/EW	-	6153	5215	■	1260	306000	✓
25	I	-	80	4000	S/EW	-	3261	2836	■	1260	305998	✓
25	I	-	80	4000	S/EW	-	4428	3752	■	1260	305999	✓

PRO versions are available on web



NORMA+ 150

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	LENGTH (mm)	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz												
76	I	-	80	4000	S/EW	-	12977	10998	■	1500	3122630	✓
50	I	-	80	4000	S/EW	-	8768	7625	■	1530	305954	✓

PRO and 6500 K versions are available on web

76 W models available from July 2024



NORMA+ 150 CL

IP65 - IK09 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	LENGTH (mm)	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz												
76	I	-	80	4000	S/EW	-	12977	10998	■	1560	3122533	✓
59	I	-	80	4000	S/EW	-	10742	9104	■	1560	305947	✓
50	I	-	80	4000	S/EW	-	8768	7625	■	1560	305946	✓
29	I	-	80	4000	S/EW	-	5285	4295	■	1560	305945	✓

Power LED - dimmable DALI 220-240 V 50/60 Hz

76	I	-	80	4000	S/EW	-	12977	10998	■	1560	3122534	✓
59	I	-	80	4000	S/EW	-	10742	9104	■	1560	305995	✓
50	I	-	80	4000	S/EW	-	8768	7625	■	1560	305994	✓
29	I	-	80	4000	S/EW	-	5285	4295	■	1560	305993	✓

Power LED - emergency 1h - 220-240 V 50/60 Hz

76	I	-	80	4000	S/EW	-	12977	10998	■	1560	3122535	✓
59	I	-	80	4000	S/EW	-	10742	9103	■	1560	306003	✓
50	I	-	80	4000	S/EW	-	8768	7625	■	1560	306002	✓
29	I	-	80	4000	S/EW	-	5285	4295	■	1560	306001	✓

PRO and 6500 K versions are available on web

76 W models available from July 2024





Palaleonessa - Brescia - Italy