


WIN PRO 40




Scan the QR-code for the latest information

■ GR-94 / Metallic grey / Textured


High-powered LED floodlight for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra clear, toughened, flat glass diffuser
- High-transparency polycarbonate optics
- Anti-ageing custom moulded silicone sealing gasket(s) with resilient elastic return capacity
- Tempered glass hinged to the housing by polyester powder coat finish die-cast aluminium brackets ISO 9227/12944 - ISO 9223 (C5)
- Cable gland M20x1.5 for cables Ø 6 - Ø 13 mm
- Supplied with 0,5 m pre-wired H07RN-F 3G2,5 mm² cable
- Stainless steel locking hardware
- Powder-coated steel tilttable bracket
- All WIN PRO 40 power consumption includes power unit losses
- Integral graduated goniometer for aiming purposes
- Openable and maintainable luminaire (future-proof)
- For WIN PRO 40, use only the power supply units available as accessories (ordered separately)
- IP66-rated power control gears are available in RPA, DALI and DMX-RDM. Maximum distance of 50 m cable length between control gear and luminaire (1CH)
- Standard supplied with two stainless steel brackets allowing the control gear to be fixed directly to the back of the luminaire
- The power supply groups are made up of drivers with protection against mains power surges of up to 10 kV (CM/DM)
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory
- For up lighting installation, consult factory



WIN PRO 40

Identifying and classifying our optics

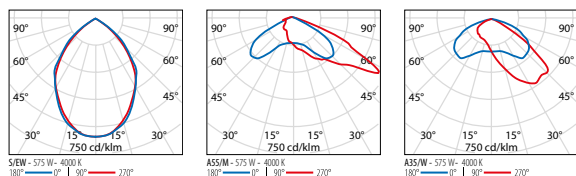

WIN PRO 40 S/EW

IP66 - IK08 - 960 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED											
575	I	-	70	5700	S/EW	-	94568	86052		3118174	✓
575	I	-	70	4000	S/EW	-	97382	85140		3118173	✓
575	I	-	70	3000	S/EW	-	92264	81981		3118172	✓
392	I	-	70	5700	S/EW	-	62982	57825		3118165	✓
392	I	-	70	4000	S/EW	-	64856	57195		3118164	✓
392	I	-	70	3000	S/EW	-	61447	55073		3118163	✓



WIN PRO 40 A/M

IP66 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED											
575	I	-	70	5700	A55/M	-	94568	84112		3118168	✓
575	I	-	70	4000	A55/M	-	97382	83322		3118167	✓
575	I	-	70	3000	A55/M	-	92264	80133		3118166	✓
392	I	-	70	5700	A55/M	-	62982	54848		3118159	✓
392	I	-	70	4000	A55/M	-	64856	54251		3118158	✓
392	I	-	70	3000	A55/M	-	61447	52238		3118157	✓



WIN PRO 40 A/W

IP66 - IK08 - 960 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED											
575	I	-	70	5700	A35/W	-	94568	80318		3118171	✓
575	I	-	70	4000	A35/W	-	97382	79472		3118170	✓
575	I	-	70	3000	A35/W	-	92264	76511		3118169	✓
392	I	-	70	5700	A35/W	-	62982	53586		3118162	✓
392	I	-	70	4000	A35/W	-	64856	53006		3118161	✓
392	I	-	70	3000	A35/W	-	61447	51039		3118160	✓



Control gear


DESCRIPTION	COLOR	PART NUMBER	UKCA
WIN PRO 40			
DRIVER BOX 600 W - 2 A - 1 CH - RPA		3118130	✓
DRIVER BOX 600 W - 2 A - 1 CH - DALI		3118131	✓
DRIVER BOX 600 W - 2 A - 1 CH - DMX		3118132	✓




3118130
3118131
3118132

Optional accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
WIN PRO 40			
Louvre WIN PRO 40 - 5°		3118121	✓
Louvre WIN PRO 40 - 10°		3118182	✓
Connection Kit 5P Ø 8÷17 mm - IP68		3115887	✓
Strengthening bracket. Suitable for one floodlight single point fixing M20 screw in centre of the bracket		3118332	✓



3118121



3118182



3115887



3118332