


GUELL ZERO




Scan the QR-code for the latest information

■ GR-94 / Metallic grey / Textured


■ BK-RAL9005 / Black RAL9005 / Glossy

LED floodlight for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra clear, toughened, flat glass diffuser
- Glazing diffuser permanently sealed to the housing through high-temperature resistant silicone
- Extra pure polished aluminium reflector
- Stainless steel locking hardware
- Stainless steel locking springs for the glass
- Powder-coated steel tiltable bracket
- Complete with 1 m factory pre-wired cable H05RN-F 3G1 mm²
- Versions of GUELL ZERO KIT are complete with 0.5 m arm with integrated connection box, suitable for through wiring
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory
- Design by GIORGIO LODI




GUELL ZERO



GUELL ZERO
KIT

Identifying and classifying our optics

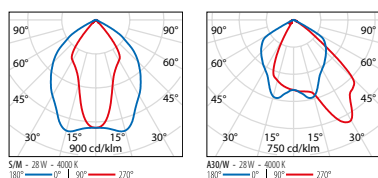

GUELL ZERO S/M

IP66 - IK06 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
28	I	-	80	4000	S/M	-	3461	3162		306514	✓
28	I	-	80	3000	S/M	-	3296	3014		306511	✓
28	I	-	80	4000	S/M	-	3461	3162		306512	✓
28	I	-	80	3000	S/M	-	3296	3014		306509	✓
15	I	-	80	4000	S/M	-	1888	1603		06115394	✓
15	I	-	80	3000	S/M	-	1888	1464		06151494	✓
15	I	-	80	4000	S/M	-	1888	1603		06149080	✓
15	I	-	80	3000	S/M	-	1840	1464		06152280	✓



GUELL ZERO A/W

IP66 - IK06 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
28	I	-	80	4000	A30/W	-	3461	3167		306523	✓
28	I	-	80	3000	A30/W	-	3296	3005		306520	✓
28	I	-	80	4000	A30/W	-	3461	3167		306521	✓
28	I	-	80	3000	A30/W	-	3296	3005		306518	✓
15	I	-	80	4000	A30/W	-	1888	1589		06115794	✓
15	I	-	80	3000	A30/W	-	1840	1488		06151294	✓
15	I	-	80	4000	A30/W	-	1888	1589		06148680	✓
15	I	-	80	3000	A30/W	-	1840	1488		06152080	✓



GUELL ZERO KIT S/M

IP66 - IK06 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
28	I	-	80	4000	S/M	-	3461	3162		306541	✓
28	I	-	80	3000	S/M	-	3296	3014		306539	✓
15	I	-	80	4000	S/M	-	1888	1603		06124980	✓
15	I	-	80	3000	S/M	-	1840	1464		06150980	✓



Optional accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
GUELL ZERO			
500 mm arm completes with connection base GUELL ZERO		14453380	✓
1000 mm arm completes with connection base GUELL ZERO		14453480	✓



14453380



14453480