


GUELL 2



Church of St. George in Braida - Verona - Italy

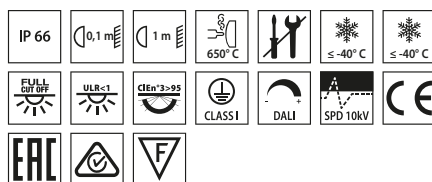


■ GR-94 / Metallic grey / Textured




Scan the QR-code for the latest information

LED floodlight for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra clear, toughened, flat glass diffuser
- High-performance polished, oxidised, iridescence-free, aluminium reflector (Al 99.99)
- Anti-ageing custom moulded silicone sealing gasket(s)
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- High asymmetrical distributions low-glare optic options available (A50/W versions)
- Stainless steel locking hardware
- Fully integrated stainless steel aluminium spring clips
- Powder-coated steel tilttable bracket
- Openable and maintainable luminaire (future-proof)
- Dimmable ballast available. Consult factory
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory
- For integral surge protection device (SPD) against mains overvoltages up to 10 kV (CM/DM) consult factory
- Design by GIORGIO LODI







GUELL 2



GUELL 2
C/I

Identifying and classifying our optics



GUELL 2 S/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
149	I	-	80	4000	S/W	-	25350	20335	■	3112391	✓
149	I	-	80	3000	S/W	-	24089	19324	■	3112388	✓
103	I	-	80	4000	S/W	-	16198	13233	■	3115110	✓
103	I	-	80	3000	S/W	-	15320	12830	■	3115111	✓
74	I	-	80	4000	S/W	-	12148	10463	■	3115115	✓
74	I	-	80	3000	S/W	-	11196	10150	■	3115116	✓

Power LED - dimmable DALI 220-240 V 50/60 Hz

149	I	-	80	4000	S/W	-	25350	20343	■	3116909	✓
149	I	-	80	3000	S/W	-	24089	19331	■	3116910	✓
103	I	-	80	4000	S/W	-	16198	13233	■	3115113	✓
103	I	-	80	3000	S/W	-	15320	12830	■	3115114	✓
74	I	-	80	4000	S/W	-	12148	10463	■	3115118	✓



GUELL 2 A/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
149	I	-	80	4000	A40/W	-	25350	20323	■	3112390	✓
149	I	-	80	3000	A40/W	-	24089	19312	■	3112387	✓
103	I	-	80	4000	A40/W	-	16198	13006	■	3115119	✓
103	I	-	80	3000	A40/W	-	15320	12619	■	3115120	✓
74	I	-	80	4000	A40/W	-	12148	10030	■	3115125	✓
74	I	-	80	3000	A40/W	-	11196	9605	■	3115126	✓

Power LED - dimmable DALI 220-240 V 50/60 Hz

149	I	-	80	4000	A40/W	-	25350	20329	■	3116911	✓
149	I	-	80	3000	A40/W	-	24089	19318	■	3116912	✓
103	I	-	80	4000	A40/W	-	16198	13006	■	3115122	✓
103	I	-	80	3000	A40/W	-	15320	12619	■	3115123	✓
74	I	-	80	4000	A40/W	-	12148	10030	■	3115128	✓
74	I	-	80	3000	A40/W	-	11196	9605	■	3115129	✓



GUELL 2 A50/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
80	I	-	80	4000	A50/W	-	12085	10032	■	3115103	✓
80	I	-	80	3000	A50/W	-	10182	9396	■	3115102	✓



GUELL 2 C/I

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
101	I	-	80	4000	C/I	-	14552	11930	■	3115108	✓
101	I	-	80	3000	C/I	-	14118	11471	■	3115107	✓
72	I	-	80	4000	C/I	-	11116	9470	■	3115105	✓
72	I	-	80	3000	C/I	-	10784	9105	■	3115104	✓



Optional accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
GUELL 2			
Protective grid GUELL 2		14173502	✓
Connection box IP 66		14174220	✓
Wall support 500 mm/19.69" GUELL 1/2	■	14173394	✓
Wall support 1000 mm/39.37" GUELL 1/2	■	14173494	✓
Single pole top support GUELL 2	■	14174094	✓
Double pole top support GUELL 2	■	14174194	✓
Reinforcing bracket GUELL 2 in painted steel. Used to fasten the floodlight with a single screw in the centre of the bracket	■	14460594	✓
GUELL 2 S/W			
Louvre GUELL 2 Symmetrical		14173720	✓
GUELL 2 S/W - GUELL 2 A/W			
Soft glass GUELL 2	■	14173994	✓
GUELL 2 A/W			
Cover GUELL 2 Asymmetrical	■	14173694	✓
Louvre GUELL 2 Asymmetrical		14173820	✓
GUELL 2 C/I			
GUELL 2/C frosted glass		14476794	✓





Timing sport center - Brescia - Italy