



MASK+



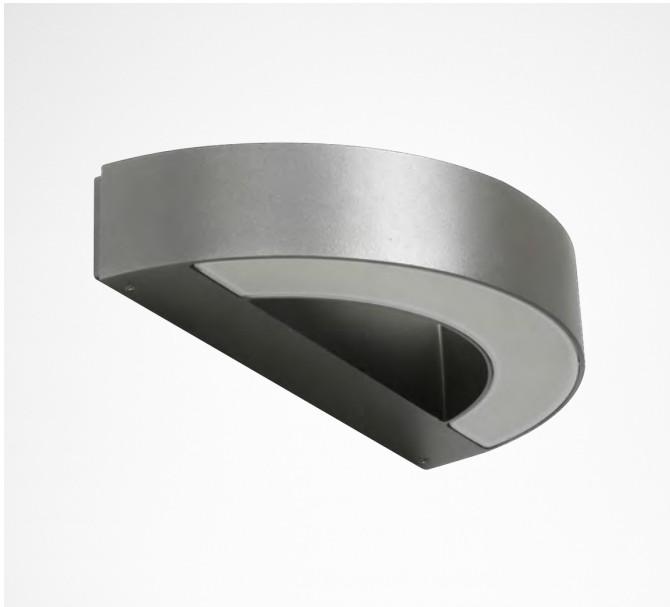


- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Scan the QR-code for the latest information

Wall-mounted LED luminaire, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Toughened flat glass diffuser, internally coated, for homogeneous light distribution
- Anti-ageing custom moulded silicone sealing gasket(s)
- Single (M) and dual (B) emission versions available
- Single emission models suitable for either upwards or downwards mounting (M options)
- Built-in driver
- Stainless steel locking hardware
- EM/1P are maintained emergency versions (1h)
- Dimmable DALI options available. Consult factory
- Design by ROBERTO FIORATO



MASK+ ROUND

MASK+


MASK+ M

IP65 - IK06 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
12.5	I	-	80	4000	S/EW	-	1668	971	■	3100765	✓
12.5	I	-	80	3000	S/EW	-	1552	914	■	3100763	✓
12.5	I	-	80	4000	S/EW	-	1668	971	□	3100766	✓
12.5	I	-	80	3000	S/EW	-	1552	914	□	3100764	✓

Power LED - emergency 1h - 220-240 V 50/60 Hz

12.5	I	-	80	4000	S/EW	-	1668	971	■	3101062	✓
12.5	I	-	80	3000	S/EW	-	1552	914	■	3101060	✓
12.5	I	-	80	4000	S/EW	-	1668	971	□	3101063	✓
12.5	I	-	80	3000	S/EW	-	1552	914	□	3101061	✓



MASK+ B

IP65 - IK06 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
24	I	-	80	4000	S/EW	-	3336	1879	■	3100769	✓
24	I	-	80	3000	S/EW	-	3104	1770	■	3100767	✓
24	I	-	80	4000	S/EW	-	3336	1879	□	3100770	✓
24	I	-	80	3000	S/EW	-	3104	1770	□	3100768	✓

