

AMON MAXI



■ AN-96 / Anthracite gray / Textured

Scan the QR-code for the latest information

Series of lighting columns, comprising:

- Extruded aluminium column, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra-clear, toughened, flat glass diffuser, silk-screened on the inside
- UV stabilised polycarbonate opal diffuser (SOFT versions)
- Coated die-cast aluminium optical compartment
- Optical unit made of high transmittance technopolymer optics or polished and oxidised pure aluminium according to models
- Anti-ageing custom moulded silicone sealing gasket(s)
- Electrical connection via junction box
- Die-cast aluminium inspection access door included
- Built-in driver
- Stainless steel locking hardware
- Coated die-cast aluminium cabling compartment
- Integral surge protection device (SPD) against mains overvoltages up to 10 kV (CM/DM)
- Floor mounting steel base plate included
- Heavy-duty die-cast aluminium base cover available as accessory (ordered separately)
- Stainless steel bolt-on root for concrete anchoring available as accessory (ordered separately)
- Dimmable DALI options available. Consult factory
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory




New building electrical wholesaler Robri - Wekerom - Netherlands



AMON WALL




AMON MINI

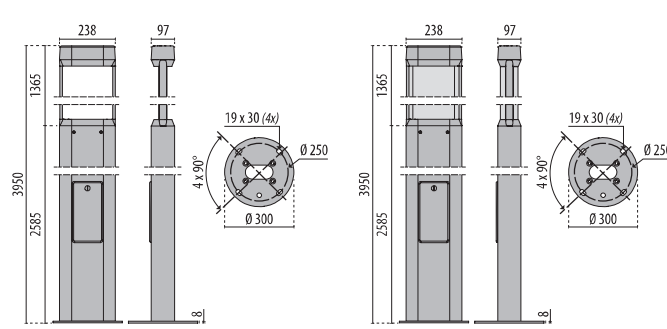

AMON MAXI

AMON MAXI
SOFT

Identifying and classifying our optics

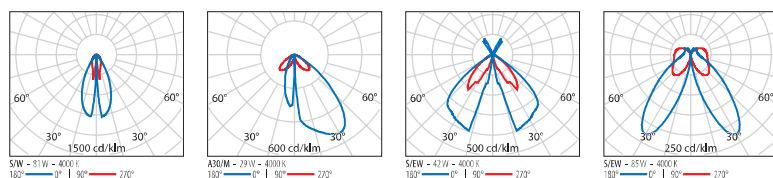

AMON MAXI S/W

IP65 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED dimmable 1-10 V 220-240 V 50/60 Hz											
76	I	-	80	4000	S/W	-	10092	3707	■	306063	✓
76	I	-	80	3000	S/W	-	9770	3596	■	306072	✓



AMON MAXI A/M

IP65 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED dimmable 1-10 V 220-240 V 50/60 Hz											
29	I	-	80	3000	A30/M	-	2850	1396	■	306074	✓
27	I	-	80	4000	A17/M	-	3120	1527	■	306064	✓
27	I	-	80	4000	A30/M	-	3120	1518	■	306065	✓
27	I	-	80	3000	A17/M	-	2850	1405	■	306073	✓



AMON MAXI S/EW

IP65 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED dimmable 1-10 V 220-240 V 50/60 Hz											
44	I	-	80	4000	S/EW	-	4992	2096	■	306066	✓
44	I	-	80	3000	S/EW	-	4512	1894	■	306075	✓



AMON MAXI SOFT S/EW


IP65 - IK07 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED dimmable 1-10 V 220-240 V 50/60 Hz											
88	I	-	80	4000	S/EW	-	7046	4145	■	306067	✓
88	I	-	80	3000	S/EW	-	5885	3938	■	306076	✓



Optional accessories


DESCRIPTION	COLOR	PART NUMBER	UKCA
AMON MAXI			
AMON groundplate cover	■	310921	✓
Flange plate with fixing rod		310922	✓
Steel bolt-on root		310923	✓



310921



310922



310923