

INSERT+ 3



Scan the QR-code for the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured


- Solid and hollow wall recessed luminaire, for indoor and outdoor, comprising :
- Die-cast aluminium housing and trim, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
 - Extra-clear toughened flat glass diffuser (A26/W versions)
 - Inner satin toughened flat glass diffuser
 - Anti-ageing custom moulded silicone sealing gasket(s)
 - IP-rated external socket-plug fast connector (QUICK), complete with factory pre-wired cable
 - Electrical connector for cables Ø 7 - Ø 12 mm
 - Built-in driver
 - Stainless steel locking hardware
 - Recessed box to be ordered separately
 - Supplied with 0,5 m pre-wired H07RN-F cable
 - Anti-tampering locking kit available as accessory
 - Available for through wiring as accessories. Connectors fit Ø 7 - Ø 10,5 mm and Ø 14 - Ø 17 mm cables



INSERT+3 A/W




INSERT+3 A26/W



INSERT+ 3

Identifying and classifying our optics

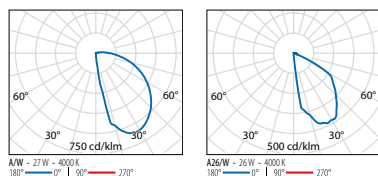

INSERT+ 3 A/W

IP66 - IK10

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
27	I	-	80	4000	A/W	-	4140	1592		3100879	✓
27	I	-	80	3000	A/W	-	4020	1502		3100877	✓
27	I	-	80	4000	A/W	-	4140	1592		3100878	✓
27	I	-	80	3000	A/W	-	4020	1502		3100876	✓



INSERT+ 3 A26/W

IP66 - IK10

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
26	I	-	70	4000	A26/W	-	3585	1399		3100875	✓
26	I	-	70	3000	A26/W	-	3450	1388		3100881	✓
26	I	-	70	4000	A26/W	-	3585	1399		3100882	✓
26	I	-	70	3000	A26/W	-	3450	1388		3100880	✓



Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
INSERT+3			
Recessed box INSERT+3		3100883	✓



3100883

Optional accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
INSERT+ 3			
Stainless steel, anti-tamper locking screws		3100992	✓
Connection Kit Y 3-way Ø 14-17 mm IP68		310495	✓
Connection Kit Y 3-way Ø 7-10.5 mm IP68		310496	✓



3100992



**310495
310496**