

CRICKET+ 15



- AN-96 / Anthracite gray / Textured
- INOX / Stainless steel / Matt



Scan the QR-code for the latest information

Series of reduced depth in-ground luminaires, comprising:


- Black painted anodised die-cast aluminium housing
- Aluminium heat sink
- High-transparency polycarbonate optics
- Anti-ageing custom moulded silicone sealing gasket(s) with resilient elastic return capacity
- Extra clear, toughened, flat glass diffuser
- Die-cast aluminium trim powder-coated
- Die-cast aluminium trim, powder-coated, covered with AISI 316 stainless steel (stainless steel options)
- Mains connection through waterproof connection system (WATER-STOP)
- Technopolymer recessed box with reinforcing bars for driveability and integral WATER-DRAIN system available as accessory (ordered separately)
- Stainless steel locking hardware
- Floor mounted luminaires are usually subject to harsh conditions. For proper use and safety, they must be correctly installed by qualified personnel and according to the manual instructions
- Do not install luminaires in sunken areas



Hotel Don Carlos - Márbella - Spain




CRICKET+ 15



CRICKET+ 15
(3111136)

Identifying and classifying our optics

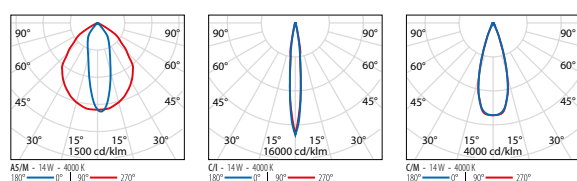

CRICKET+ 15 A/M

IP67 - IK09 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
14	I	-	90	2700	A5/M	-	1065	588	■	3111894	✓
14	I	-	90	2700	A5/M	-	1065	588	■	3111891	✓
14	I	-	80	4000	A5/M	-	1403	717	■	3108365	✓
14	I	-	80	3000	A5/M	-	1300	671	■	3108366	✓
14	I	-	80	4000	A5/M	-	1403	717	■	3108359	✓
14	I	-	80	3000	A5/M	-	1300	671	■	3108360	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
14	I	-	90	2700	A5/M	-	1065	588	■	3118704	✓
14	I	-	90	2700	A5/M	-	1065	588	■	3118701	✓
14	I	-	80	4000	A5/M	-	1403	717	■	3118695	✓
14	I	-	80	3000	A5/M	-	1300	671	■	3118696	✓
14	I	-	80	4000	A5/M	-	1403	717	■	3118689	✓
14	I	-	80	3000	A5/M	-	1300	671	■	3118690	✓



CRICKET+ 15 C/I

IP67 - IK09 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
14	I	-	90	2700	C/I	-	1065	1000,8	■	3111895	✓
14	I	-	90	2700	C/I	-	1065	1000,8	■	3111892	✓
14	I	-	80	4000	C/I	-	1403	1069	■	3108369	✓
14	I	-	80	3000	C/I	-	1300	1000	■	3108370	✓
14	I	-	80	4000	C/I	-	1403	1069	■	3108363	✓
14	I	-	80	3000	C/I	-	1300	1000	■	3108364	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
14	I	-	90	2700	C/I	-	1065	1000,8	■	3118705	✓
14	I	-	90	2700	C/I	-	1065	1000,8	■	3118702	✓
14	I	-	80	4000	C/I	-	1403	1069	■	3118699	✓
14	I	-	80	3000	C/I	-	1300	1000	■	3118700	✓
14	I	-	80	4000	C/I	-	1403	1069	■	3118693	✓
14	I	-	80	3000	C/I	-	1300	1000	■	3118694	✓



CRICKET+ 15 C/M


IP67 - IK09 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
14	I	-	90	2700	C/M	-	1065	986	■	3111896	✓
14	I	-	90	2700	C/M	-	1065	986	■	3111893	✓
14	I	-	80	4000	C/M	-	1403	1203	■	3108367	✓
14	I	-	80	3000	C/M	-	1300	1125	■	3108368	✓
14	I	-	80	4000	C/M	-	1403	1203	■	3108361	✓
14	I	-	80	3000	C/M	-	1300	1125	■	3108362	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
14	I	-	90	2700	C/M	-	1065	986	■	3118706	✓
14	I	-	90	2700	C/M	-	1065	986	■	3118703	✓
14	I	-	80	4000	C/M	-	1403	1203	■	3118697	✓
14	I	-	80	3000	C/M	-	1403	1125	■	3118698	✓
14	I	-	80	4000	C/M	-	1403	1203	■	3118691	✓
14	I	-	80	3000	C/M	-	1300	1125	■	3118692	✓



Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
CRICKET+ 15			
Recessed fixing kit		3111136	✓



3111136