

CRICKET+ 10



Cantina Valetti - Bardolino - Italy




- AN-96 / Anthracite gray / Textured
- INOX / Stainless steel / Matt


Scan the QR-code for the latest information

Series of reduced depth in-ground luminaires, comprising:

- Black painted anodised die-cast aluminium housing
- High-transparency polycarbonate optics
- Anti-ageing custom moulded silicone sealing gasket(s) with resilient elastic return capacity
- Extra clear, toughened, flat glass diffuser
- Extra-clear toughened flat safety glass with acid-etched finish (C/EW versions)
- Die-cast aluminium trim powder-coated
- Closing ring in AISI 316 stainless steel with satin finish (stainless steel versions)
- Mains connection through waterproof connection system (WATER-STOP)
- Technopolymer recess box to be ordered separately
- Stainless steel locking hardware
- Floor mounted luminaires are usually subject to harsh conditions. For proper use and safety, they must be correctly installed by qualified personnel and according to the manual instructions
- Do not install luminaires in sunken areas
- RGBW and Tunable White versions to be powered with SELV drivers 48V DC, available as accessories to be ordered separately. Colour management through DMX interface
- DMX signal generator for RGBW and Tunable White versions to be ordered separately

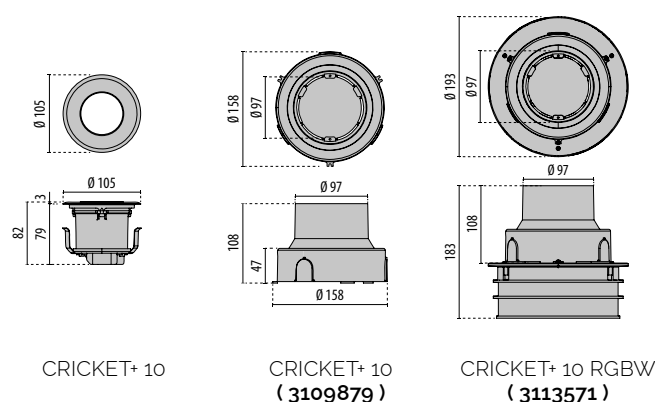

Identifying and classifying our optics

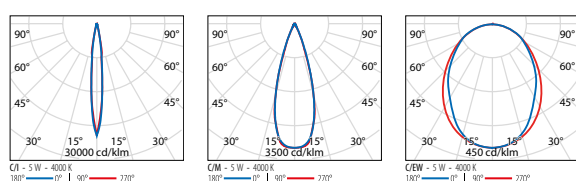

CRICKET+ 10 C/I

IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
5	I	-	90	2700	C/I	-	355	363	■	3111887	✓
5	I	-	90	2700	C/I	-	355	363	■	3111884	✓
5	I	-	80	4000	C/I	-	475	446	■	3109824	✓
5	I	-	80	3000	C/I	-	440	415	■	3109825	✓
5	I	-	80	4000	C/I	-	475	446	■	3109818	✓
5	I	-	80	3000	C/I	-	440	415	■	3109819	✓



CRICKET+ 10 C/M

IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
5	I	-	90	2700	C/M	-	355	355,5	■	3111886	✓
5	I	-	90	2700	C/M	-	355	355,5	■	3111883	✓
5	I	-	80	4000	C/M	-	475	436	■	3109822	✓
5	I	-	80	3000	C/M	-	440	406	■	3109823	✓
5	I	-	80	4000	C/M	-	475	436	■	3109816	✓
5	I	-	80	3000	C/M	-	440	406	■	3109817	✓



CRICKET+ 10 RGBW C/M

IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
RGBW LED											
3.5	III	-	80	rgbw 4000	C/M	30°	130	100	■	3112274	✓
3.5	III	-	80	rgbw 4000	C/M	30°	130	100	■	3112273	✓



CRICKET+ 10 TW C/M

IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
TunableWhite Power LED											
6	III	-	80	tw 2700-5700	C/M	30°	440	310	■	3112277	✓
6	III	-	80	tw 2700-5700	C/M	30°	440	310	■	3112276	✓



CRICKET+ 10 C/EW

IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
5	I	-	90	2700	C/EW	-	355	106	■	3111885	✓
5	I	-	90	2700	C/EW	-	355	106	■	3111882	✓
5	I	-	80	4000	C/EW	-	475	278	■	3109820	✓
5	I	-	80	3000	C/EW	-	440	130	■	3109821	✓
5	I	-	80	4000	C/EW	-	475	142	■	3109814	✓
5	I	-	80	3000	C/EW	-	440	130	■	3109815	✓



Control gear

DESCRIPTION	COLOR	PART NUMBER	UKCA
CRICKET+ 10 RGBW / CRICKET+ 10 TW			
Driver - CV 500 W - 48 V kit		310951	✓
Driver - CV 100 W - 48 V kit		310950	✓
Controller DMX touch white		3117844	✓
Controller DMX touch black		3117845	✓
USB key EcoEcco		3115612	✓



310951



310950



3117844




3117845




3115612

Mandatory accessories


DESCRIPTION	COLOR	PART NUMBER	UKCA
CRICKET+ 10			
Recessed box CRICKET+ 10		3109879	✓
CRICKET+ 10 RGBW			
Recessed box CRICKET+ 10 RGBW/TW		3113571	✓



3109879



3113571

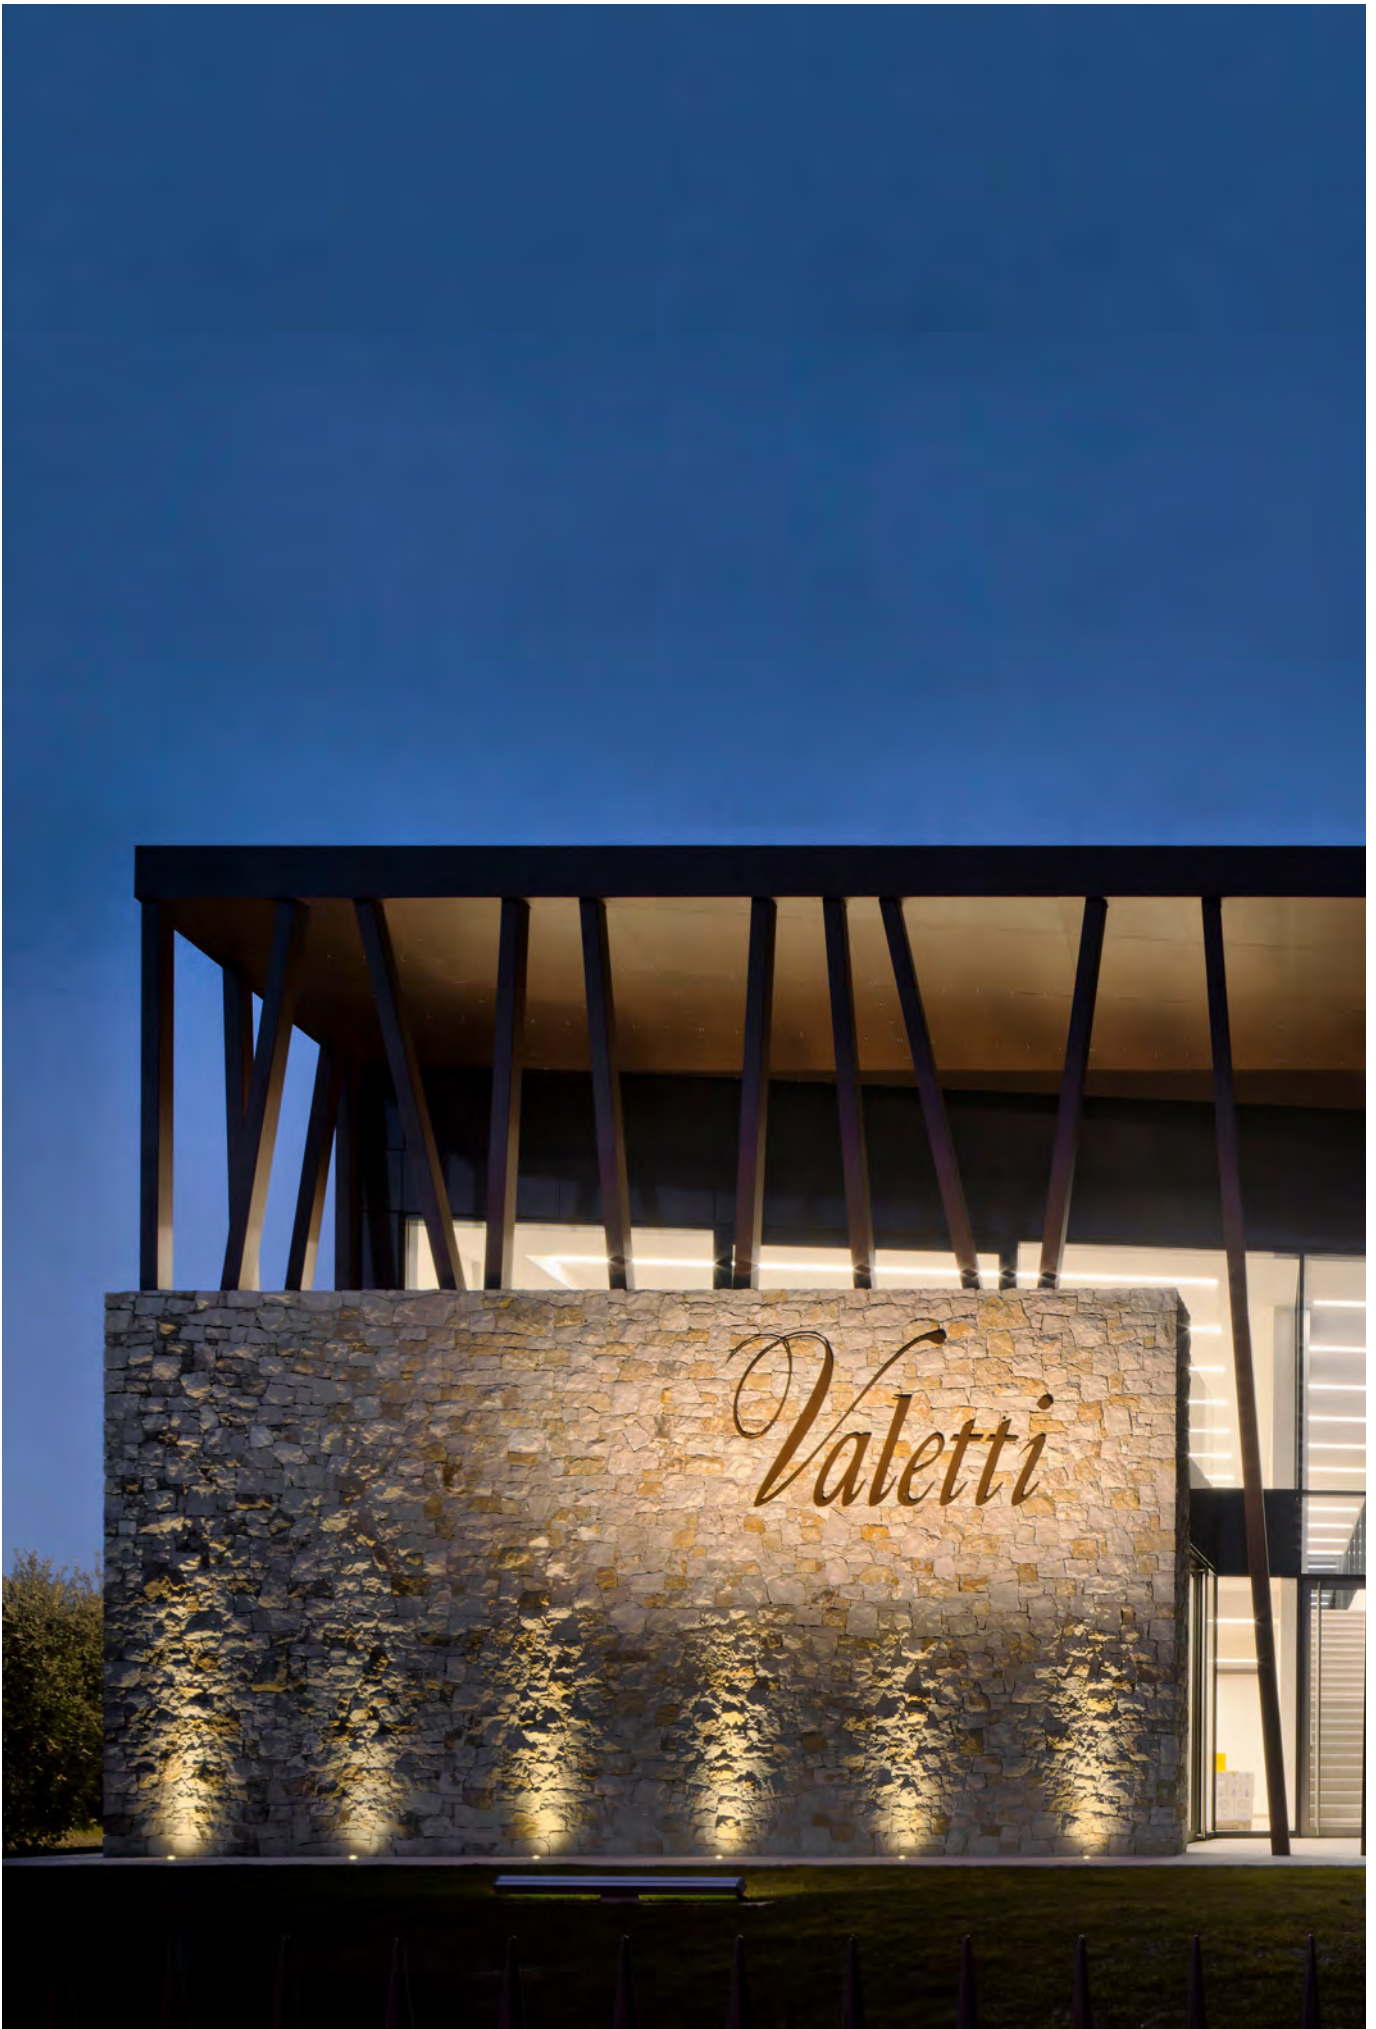

Cantina Valetti - Bardolino - Italy