


WIN PRO 30



■ GR-94 / Metallic grey / Textured

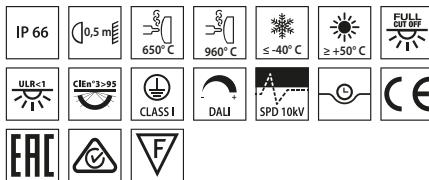


Scan the QR-code for the latest information

LED floodlight for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra clear, toughened, flat glass diffuser
- High-transparency polycarbonate optics
- Anti-ageing custom moulded silicone sealing gasket(s) with resilient elastic return capacity
- Fully integrated PA66 fiberglass reinforced technopolymer trim hinged to the housing
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Stainless steel locking hardware
- Powder-coated steel tiltable bracket
- Built-in driver
- Integral surge protection device (SPD) against mains overvoltages up to 10 kV (CM/DM)
- Openable and maintainable luminaire (future-proof)
- Complete with ZHAGA socket positioned on the upper part of the luminaire (UP position) and D4i driver. Ready for "radio frequency node" smart, twilight and other compatible solutions (ZHAGA options). Consult factory for more options
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory
- Complete with integral, powder-coated, die-cast aluminium trim and 1 m factory pre-wired cable (WIN PRO+ versions)




Timing sport center - Brescia - Italy



WIN PRO 30

Identifying and classifying our optics

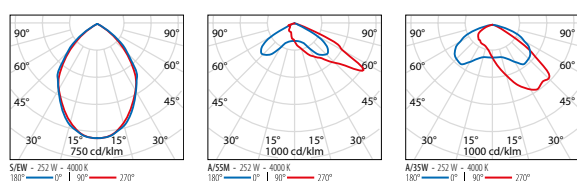

WIN PRO 30 S/EW

IP66 - IK08 - 960 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
252	I	-	70	4000	S/EW	-	42232	39388	■	3114613	✓
252	I	-	70	3000	S/EW	-	40613	37879	■	3114612	✓
195	I	-	70	4000	S/EW	-	35586	31320	■	3114577	✓
195	I	-	70	3000	S/EW	-	34221	30120	■	3114576	✓
130	I	-	70	4000	S/EW	-	23712	21371	■	3114541	✓
130	I	-	70	3000	S/EW	-	22803	20552	■	3114540	✓

Power LED - dimmable DALI 220-240 V 50/60 Hz

252	I	-	70	4000	S/EW	-	42232	39388	■	3114616	✓
252	I	-	70	3000	S/EW	-	40613	37879	■	3114615	✓
195	I	-	70	4000	S/EW	-	35586	31320	■	3114580	✓
195	I	-	70	3000	S/EW	-	34221	30120	■	3114579	✓
130	I	-	70	4000	S/EW	-	23712	21371	■	3114544	✓
130	I	-	70	3000	S/EW	-	22803	20552	■	3114543	✓

Power LED - with automatic power reduction 220-240 V 50/60 Hz

252	I	-	70	4000	S/EW	-	42232	39388	■	3114619	✓
252	I	-	70	3000	S/EW	-	40613	37879	■	3114618	✓
195	I	-	70	4000	S/EW	-	35586	31320	■	3114583	✓
195	I	-	70	3000	S/EW	-	34221	30120	■	3114582	✓
130	I	-	70	4000	S/EW	-	23712	21371	■	3114547	✓
130	I	-	70	3000	S/EW	-	22803	20552	■	3114546	✓

5700 K and PRO+ (Aluminium Ring / 1 m cabel) versions are available on web



WIN PRO 30 S/EW ZHAGA

IP66 - IK08 - 960 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - dimmable D4i with ZHAGA socket UP - 220-240 V 50/60 Hz											
252	I	-	70	4000	S/EW	-	42232	39388	■	3114622	✓
252	I	-	70	3000	S/EW	-	40613	37879	■	3114621	✓
195	I	-	70	4000	S/EW	-	35586	31320	■	3114586	✓
195	I	-	70	3000	S/EW	-	34221	30120	■	3114585	✓
130	I	-	70	4000	S/EW	-	23712	21371	■	3114550	✓
130	I	-	70	3000	S/EW	-	22803	20552	■	3114549	✓

5700 K and PRO+ (Aluminium Ring / 1 m cabel) versions are available on web



WIN PRO 30 A/M

IP66 - IK08 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
252	I	-	70	4000	A55/M	-	42232	37262	■	3114589	✓
252	I	-	70	3000	A55/M	-	40613	35834	■	3114588	✓
195	I	-	70	4000	A55/M	-	35586	29468	■	3114553	✓
195	I	-	70	3000	A55/M	-	34221	28338	■	3114552	✓
130	I	-	70	4000	A55/M	-	23712	20174	■	3114517	✓
130	I	-	70	3000	A55/M	-	22803	19401	■	3114516	✓

Power LED - dimmable DALI 220-240 V 50/60 Hz

252	I	-	70	4000	A55/M	-	42232	37262	■	3114592	✓
252	I	-	70	3000	A55/M	-	40613	35834	■	3114591	✓
195	I	-	70	4000	A55/M	-	35586	29468	■	3114556	✓
195	I	-	70	3000	A55/M	-	34221	28338	■	3114555	✓
130	I	-	70	4000	A55/M	-	23712	20174	■	3114520	✓
130	I	-	70	3000	A55/M	-	22803	19401	■	3114519	✓

Power LED - with automatic power reduction 220-240 V 50/60 Hz

252	I	-	70	4000	A55/M	-	42232	37262	■	3114595	✓
252	I	-	70	3000	A55/M	-	40613	35834	■	3114594	✓
195	I	-	70	4000	A55/M	-	35586	29468	■	3114559	✓
195	I	-	70	3000	A55/M	-	34221	28338	■	3114558	✓
130	I	-	70	4000	A55/M	-	23712	20174	■	3114523	✓
130	I	-	70	3000	A55/M	-	22803	19401	■	3114522	✓

5700 K and PRO+ (Aluminium Ring / 1 m cabel) versions are available on web



WIN PRO 30 A/M ZHAGA

IP66 - IK08 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - dimmable D4i with ZHAGA socket UP - 220-240 V 50/60 Hz											
252	I	-	70	4000	A55/M	-	42232	37262	■	3114598	✓
252	I	-	70	3000	A55/M	-	40613	35834	■	3114597	✓
195	I	-	70	4000	A55/M	-	35586	29468	■	3114562	✓
195	I	-	70	3000	A55/M	-	34221	28338	■	3114561	✓
130	I	-	70	4000	A55/M	-	23712	20174	■	3114526	✓
130	I	-	70	3000	A55/M	-	22803	19401	■	3114525	✓

5700 K and PRO+ (Aluminium Ring / 1 m cabel) versions are available on web



WIN PRO 30 A/W

IP66 - IK08 - 960 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
252	I	-	70	4000	A35/W	-	42232	36010	■	3114601	✓
252	I	-	70	3000	A35/W	-	40613	34630	■	3114600	✓
195	I	-	70	4000	A35/W	-	35586	28685	■	3114565	✓
195	I	-	70	3000	A35/W	-	34221	27856	■	3114564	✓
130	I	-	70	4000	A35/W	-	23712	19626	■	3114529	✓
130	I	-	70	3000	A35/W	-	22803	18874	■	3114528	✓

Power LED - dimmable DALI 220-240 V 50/60 Hz

252	I	-	70	4000	A35/W	-	42232	36010	■	3114604	✓
252	I	-	70	3000	A35/W	-	40613	34630	■	3114603	✓
195	I	-	70	4000	A35/W	-	35586	28685	■	3114568	✓
195	I	-	70	3000	A35/W	-	34221	27856	■	3114567	✓
130	I	-	70	4000	A35/W	-	23712	19626	■	3114532	✓
130	I	-	70	3000	A35/W	-	22803	18874	■	3114531	✓

Power LED - with automatic power reduction 220-240 V 50/60 Hz

252	I	-	70	4000	A35/W	-	42232	36010	■	3114607	✓
252	I	-	70	3000	A35/W	-	40613	34630	■	3114606	✓
195	I	-	70	4000	A35/W	-	35586	28685	■	3114571	✓
195	I	-	70	3000	A35/W	-	34221	27856	■	3114570	✓
130	I	-	70	4000	A35/W	-	23712	19626	■	3114535	✓
130	I	-	70	3000	A35/W	-	22803	18874	■	3114534	✓

5700 K and WIN PRO+ 30 (Aluminium Ring / 1 m cable) versions are available on web



WIN PRO 30 A/W ZHAGA

IP66 - IK08 - 960 °C


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - dimmable D4i with ZHAGA socket UP - 220-240 V 50/60 Hz											
252	I	-	70	4000	A35/W	-	42232	36010	■	3114610	✓
252	I	-	70	3000	A35/W	-	40613	34630	■	3114609	✓
195	I	-	70	4000	A35/W	-	35586	28685	■	3114574	✓
195	I	-	70	3000	A35/W	-	34221	27856	■	3114573	✓
130	I	-	70	4000	A35/W	-	23712	19626	■	3114538	✓
130	I	-	70	3000	A35/W	-	22803	18874	■	3114537	✓

5700 K and WIN PRO+ 30 (Aluminium Ring / 1 m cable) versions are available on web




Optional accessories


DESCRIPTION	COLOR	PART NUMBER	UKCA
WIN PRO 30			
Louvre WIN PRO 30 - 5°	■	3116517	✓
Louvre WIN PRO 30 - 10°	■	3116518	✓
External steel cowl painted aluminium grey	■	14045794	✓
External anti-glare louvre painted aluminium grey	■	14045694	✓
Connection Kit 5P Ø 8÷17 mm - IP68		3115887	✓
Strengthening bracket. Suitable for one floodlight single point fixing			
M12 screw in centre of the bracket	■	14046120	✓
Single pole top mounting, for Ø 60-76 mm poles, painted aluminium grey	■	14051294	✓
1000 mm extension arm in heavy gauge steel, painted aluminium grey	■	14048694	✓
Double pole top mounting, Ø 60-76 mm poles, painted aluminium grey	■	14051394	✓
Long bracket for ceiling mounting, painted aluminium grey	■	14057394	✓




3116517



3116518




14045794



14045694




3115887



14046120



14051294



14048694



14051394



14057394