


# ELIA OL

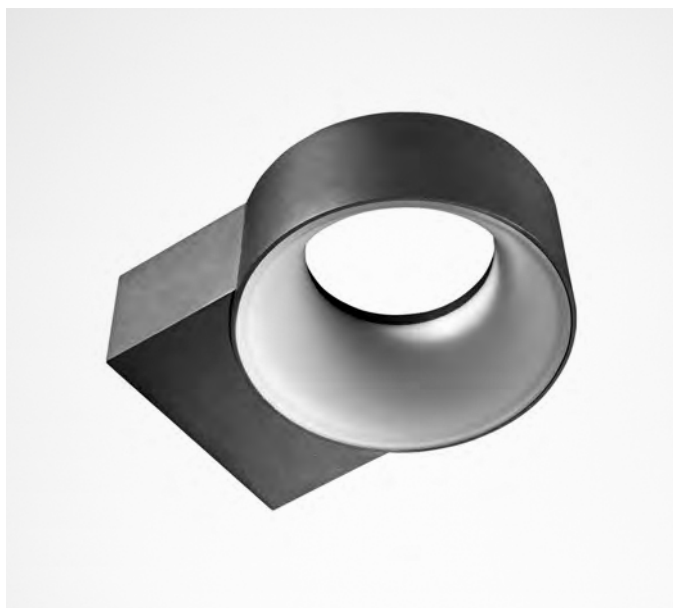


- BK-RAL9005 / Black RAL9005 /
- WH-RAL9016 / White RAL9016 /

Scan the QR-code for  
the latest information

Die-cast aluminum fixture for wall mounting, ideal for indoor and outdoor architectural lighting such as: stairs, passageways or facades, quick and easy to install, with a clean and essential line:

- Designed in two different finishes (black and white), with double emission diffusing polycarbonate opal screen (top and down) to create a comfortable atmosphere, color temperatures of 3,000K, 4,000 K and 5,700 K and a color rendering index greater than 80
- It has been designed to withstand temperature variations from -20 °C to + 45 °C, water and dust penetration up to IP65 degree and shocks up to IK08 degree
- Light and handy, it is easy to install thanks also to the rear bracket for fixing, the quick-fit terminal placed in the back for the electrical wiring

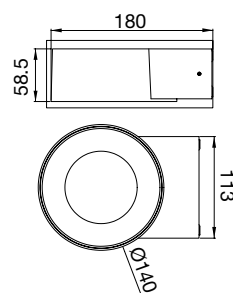

ELIA OL

## ELIA OL

IP65 - IK08 - 750 °C

| LUMINAIRE<br>WATTAGE (W)            | CLASS | ENEC | CRI | KELVIN | OPTIC | BEAM ANGLE | LIGHTSOURCE LUMEN<br>OUTPUT (lm) | LUMINAIRE LUMEN<br>OUTPUT (lm) | COLOUR /<br>FINISH | PART NUMBER         | UKCA |
|-------------------------------------|-------|------|-----|--------|-------|------------|----------------------------------|--------------------------------|--------------------|---------------------|------|
| <b>Power LED 100-240 V 50/60 Hz</b> |       |      |     |        |       |            |                                  |                                |                    |                     |      |
| 8                                   | I     | -    | 80  | 4000   | OPAL  | -          | -                                | 650                            | ■                  | <b>GWF2100FR840</b> | ✓    |
| 8                                   | I     | -    | 80  | 3000   | OPAL  | -          | -                                | 650                            | ■                  | <b>GWF2100FR830</b> | ✓    |
| 8                                   | I     | -    | 80  | 4000   | OPAL  | -          | -                                | 650                            | □                  | <b>GWF2110FR840</b> | ✓    |
| 8                                   | I     | -    | 80  | 3000   | OPAL  | -          | -                                | 650                            | □                  | <b>GWF2110FR830</b> | ✓    |

