



DX

HIGHLIGHTING AND ILLUMINATING SPACES

The Dx projector family stands out for its extraordinary versatility, thanks to a range of accessories that make it ideal for various applications. Dx projectors are suitable for installations on solid surfaces, such as floors, ceilings, and walls, as well as for ground installations using stakes.

Made from high-quality aluminum, turned, anodized, and painted with a diffusing glass fixed with silicone adhesive to ensure IP protection, they are equipped with power LEDs.

Their adjustability, combined with low-luminance lighting and refined finishes, guarantees excellent aesthetic and functional performance in any setting.

Both the 38 mm and 54 mm models can be used as projectors, by directly attaching the bracket or available in the versions with a stem.

The DX 38 is the smallest spot projector, powered by 24V low voltage, and is available in 3 different heights (60 mm, 160 mm, 500 mm) for installation on solid surfaces with a base, or in the ground with the spike version. It is also offered with an integrated power supply in the specific version with a base (92x59 mm).

The DX54 is available in the 24V version or with an integrated 220-240V power supply and in 3 heights (70 mm, 170 mm, 510 mm); for installation on solid surfaces with the version with a base or on the ground with the spike version.

La famiglia di proiettori Dx si distingue per la sua straordinaria versatilità, grazie a una gamma di accessori che la rende ideale per diverse applicazioni.

I proiettori Dx sono adatti per installazioni su superfici solide, come pavimenti, soffitti e pareti, oltre che per installazioni a terra grazie all'uso del picchetto.

Realizzato in alluminio di primaria qualità, tornito, anodizzato e verniciato con vetro diffusore fissato con collante silconico a garantirne la tenuta IP, equipaggiato da power led.


La loro orientabilità, combinata con un'illuminazione a bassa luminanza e le raffinate finiture, garantisce un'eccellente resa estetica e funzionale in qualsiasi contesto. Sia il modello 38mm che il 54mm sono utilizzabili come proiettore, fissando direttamente la staffa oppure disponibili nelle versioni su stelo.

DX 38 è lo spot più piccolo, alimentato 24V bassa tensione è disponibile in 3 altezze differenti (h.60mm, h.160mm, h.500mm) per installazione su superfici solide nella versione con base o nel terreno per la versione con picchetto.

Proposto anche con alimentatore integrato nella versione specifica con base (92x59mm).

DX54 disponibile in versione 24V o con alimentatore integrato nel corpo 220-240V e in 3 altezze (h.70mm, h.170mm, h.510mm); per installazione su superfici solide nella versione con base o nel terreno la versione con picchetto.



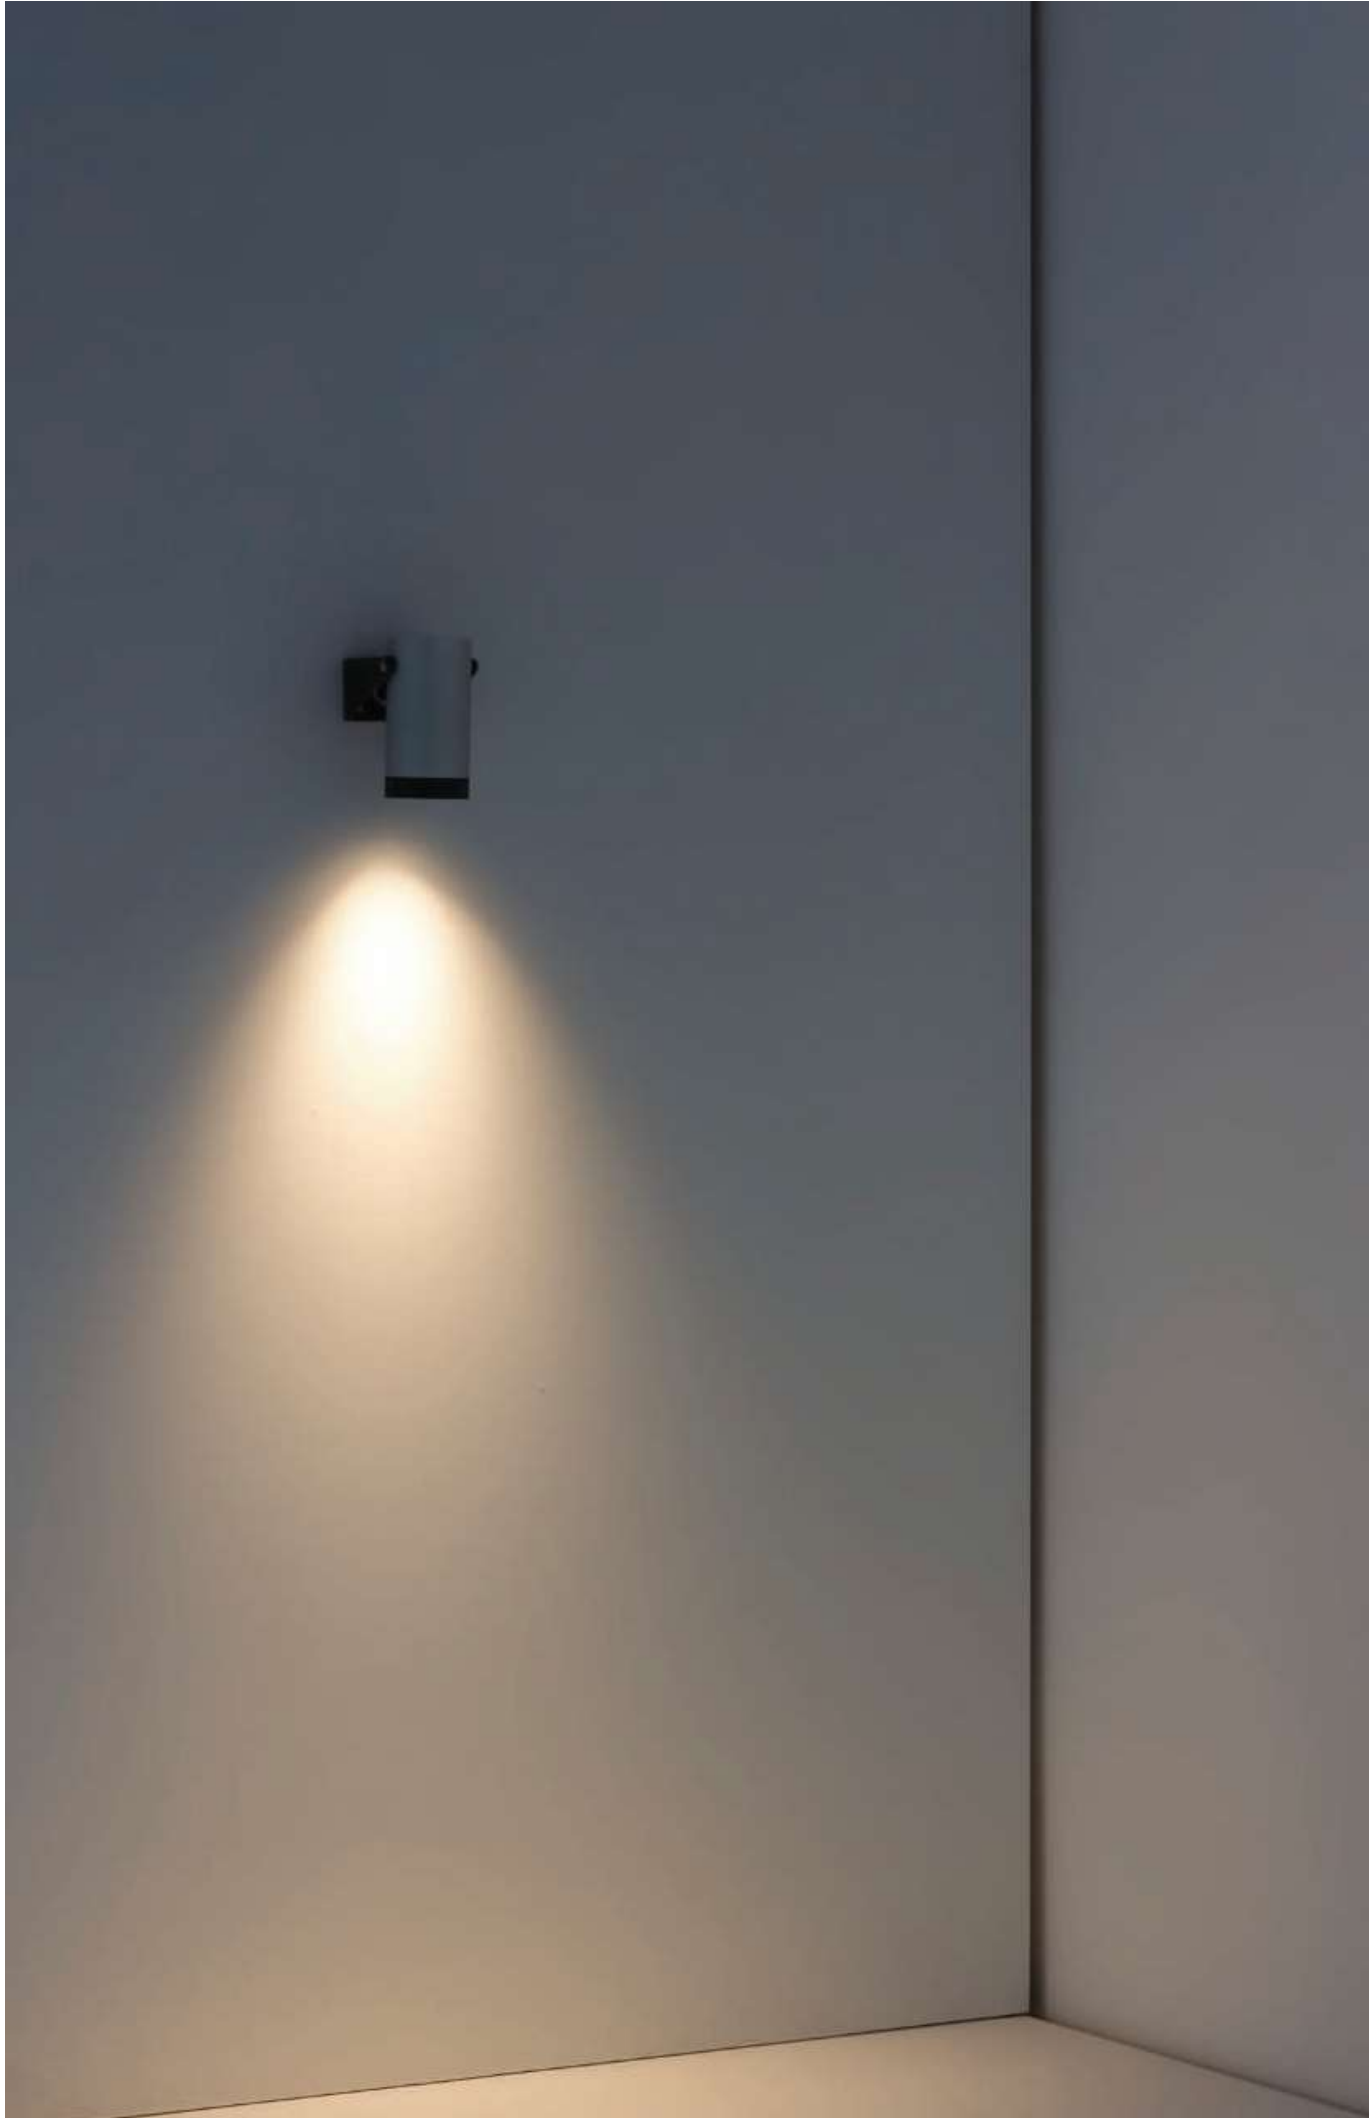










Dx Ø38

18° | 36°



Available finishes:

- aluminium
- bronze
- black

Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application wall, ground, roof
Diffuser transparent glass


Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black
2700K	24V	▲ 18° with honeycomb	98	900432006	900432009	900432007
2Wled		▲ 36° with honeycomb	74	900432016	900432019	900432017
3We		▲ 18° without honeycomb	103	900432186	900432189	900432187
		▲ 36° without honeycomb	222	900432196	900432199	900432197
		fascio	lm	aluminium	bronze	black
3000K	24V	▲ 18° with honeycomb	103	900412006	900412009	900412007
2Wled		▲ 36° with honeycomb	78	900412016	900412019	900412017
3We		▲ 18° without honeycomb	178	900412186	900412189	900412187
		▲ 36° without honeycomb	234	900412196	900412199	900412197

Dx Ø38 Stem Spike h.60

18° | 36°



Available finishes:



aluminium

bronze

black

Light Source

Supply

Dimmer

CRI

IP rating

Electrical Class

Application

Diffuser

power led

24V

PWM

≥80

IP65

III

ground

transparent glass

Power

Led Colour temp.

24V 2Wled - 3We

2700K / 3000K



		fascio	lm	aluminium	bronze	black
2700K	24V	▲ 18° with honeycomb	98	900432056	900432059	900432057
2Wled		▲ 36° with honeycomb	74	900432086	900432089	900432087
3We		▲ 18° without honeycomb	103	900432246	900432249	900432247
		▲ 36° without honeycomb	222	900432276	900432279	900432277

		fascio	lm	aluminium	bronze	black
3000K	24V	▲ 18° with honeycomb	103	900412056	900412059	900412057
2Wled		▲ 36° with honeycomb	78	900412086	900412089	900412087
3We		▲ 18° without honeycomb	178	900412246	900412249	900412247
		▲ 36° without honeycomb	234	900412276	900412279	900412277


Dx Ø38 Stem Spike h.160

18° | 36°

Available finishes:

- aluminium
- bronze
- black

Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application ground
Diffuser transparent glass




Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black
2700K	24V	🔆 18° with honeycomb	98	900432066	900432069	900432067
2Wled		🔆 36° with honeycomb	74	900432096	900432099	900432097
3We		🔆 18° without honeycomb	103	900432256	900432259	900432257
		🔆 36° without honeycomb	222	900432286	900432289	900432287
		fascio	lm	aluminium	bronze	black
3000K	24V	🔆 18° with honeycomb	103	900412066	900412069	900412067
2Wled		🔆 36° with honeycomb	78	900412096	900412099	900412097
3We		🔆 18° without honeycomb	178	900412256	900412259	900412257
		🔆 36° without honeycomb	234	900412286	900412289	900412287

Dx Ø38 Stem Spike h.500

18° | 36°

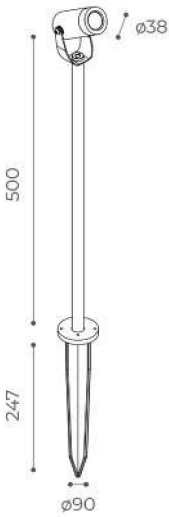

Available finishes:

- aluminium
- bronze
- black

Light Source power led
Supply 24V
Dimmer PWM
CRI ≥80
IP rating IP65
Electrical Class III
Application ground
Diffuser transparent glass


Power 24V 2Wled - 3We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black
2700K	24V	▲ 18° with honeycomb	98	900432076	900432079	900432077
2Wled		▲ 36° with honeycomb	74	900432106	900432109	900432107
3We		▲ 18° without honeycomb	103	900432266	900432269	900432267
		▲ 36°	222	900432296	900432299	900432297
		fascio	lm	aluminium	bronze	black
3000K	24V	▲ 18° with honeycomb	103	900412076	900412079	900412077
2Wled		▲ 36° with honeycomb	78	900412106	900412109	900412107
3We		▲ 18° without honeycomb	178	900412266	900412269	900412267
		▲ 36° without honeycomb	234	900412296	900412299	900412297

Dx Ø38 Stem Base h.60

18° | 36°



Available finishes:



Light Source power led
Supply 220-240V
Dimmer not
CRI ≥80
IP rating IP65
Electrical Class II
Application ground
Diffuser transparent glass


Power 220-240V 2Wled - 3,5We
Led Colour temp. 2700K / 3000K




		fascio	lm	aluminium	bronze	black
2700K 2Wled 3,5We	220-240V	🔆 18° with honeycomb	98	900431436	900431439	900431437
		🔆 36° with honeycomb	74	900431496	900431499	900431497
		🔆 18° without honeycomb	103	900431466	900431469	900431467
		🔆 36° without honeycomb	222	900431526	900431529	900431527
		fascio	lm	aluminium	bronze	black
3000K 2Wled 3,5We	220-240V	🔆 18° with honeycomb	103	900411436	900411439	900411437
		🔆 36° with honeycomb	78	900411496	900411499	900411497
		🔆 18° without honeycomb	178	900411466	900411469	900411467
		🔆 36° without honeycomb	234	900411526	900411529	900411527

Dx Ø38 Stem Base h.160

18° | 36°



Available finishes:



Light Source power led
Supply 220-240V
Dimmer not
CRI ≥80
IP rating IP65
Electrical Class II
Application ground
Diffuser transparent glass

Power 220-240V 2Wled - 3,5We
Led Colour temp. 2700K / 3000K




		fascio	lm	aluminium	bronze	black
2700K	220-240V	▲ 18° with honeycomb	98	900431446	900431449	900431447
2Wled		▲ 36° with honeycomb	74	900431506	900431509	900431507
3,5We		▲ 18° without honeycomb	103	900431476	900431479	900431477
		▲ 36° without honeycomb	222	900431536	900431539	900431537

		fascio	lm	aluminium	bronze	black
3000K	220-240V	▲ 18° with honeycomb	103	900411446	900411449	900411447
2Wled		▲ 36° with honeycomb	78	900411506	900411509	900411507
3,5We		▲ 18° without honeycomb	178	900411476	900411479	900411477
		▲ 36° without honeycomb	234	900411536	900411539	900411537

Dx Ø38 Stem Base h.500

18° | 36°

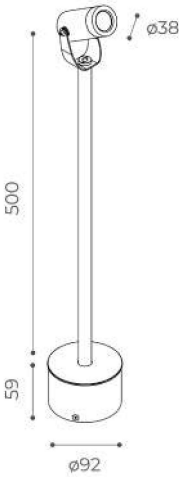

Available finishes:




Light Source power led
Supply 220-240V
Dimmer not
CRI ≥80
IP rating IP65
Electrical Class II
Application ground
Diffuser transparent glass

Power 220-240V 2Wled - 3,5We
Led Colour temp. 2700K / 3000K




		fascio	lm	aluminium	bronze	black
2700K 2Wled 3,5We	220-240V	▲ 18° with honeycomb	98	900431456	900431459	900431457
		▲ 36° with honeycomb	74	900431516	900431519	900431517
		▲ 18° without honeycomb	103	900431486	900431489	900431487
		▲ 36° without honeycomb	222	900431546	900431549	900431547
		fascio	lm	aluminium	bronze	black
3000K 2Wled 3,5We	220-240V	▲ 18° with honeycomb	103	900411456	900411459	900411457
		▲ 36° with honeycomb	78	900411516	900411519	900411517
		▲ 18° without honeycomb	178	900411486	900411489	900411487
		▲ 36° without honeycomb	234	900411546	900411549	900411547

ACCESSORIES




Power supply 8V 110-2240V IP54
44x46x26mm

code **9037**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




Power supply 24V 16Watt IP20
118x52x26mm

code **9006**




Power supply 24V DC 150W IP67
267x79x52mm

code **9057**




Power supply 24V 20Watt IP20
103x67x21mm

code **9007**




SPD CL.1 12KV 320V UC max
40x57x20mm

code **9058**




Power supply 24V 50Watt IP20
190x60x36mm

code **9008**




Tube Frame
Ø38x25mm
colour **Black**

code **90117**



Power supply 16W 110-240V IP65
125x61x31mm

code **9059**



Eyelid Frame
Ø38x39mm
colour **Black**


code **90127**

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9059 / 9049 / 9057 / 9058 / 90117 / 90127**

Dx Ø54

10° | 26° | 52°



Available finishes:



aluminium

bronze

black

Light Source

Supply

Dimmer

CRI

IP rating

Electrical Class

Application

Diffuser

power led

24V / 220-240V

only 24V (PWM)

≥80

IP65

II, III

wall, ground, roof

transparent glass

Power

Led Colour temp.

24V 5,8Wled -6,3We

220-240V 5,8Wled - 6,9We


2700K / 3000K



		fascio	lm	aluminium	bronze	black
2700K	24V III	▲ 10° with honeycomb	243	900432436	900432439	900432437
5,8Wled		▲ 26° with honeycomb	251	900432036	900432039	900432037
6,3We		▲ 52° with honeycomb	135	900432046	900432049	900432047
		▲ 10° without honeycomb	405	900432446	900432449	900432447
		▲ 26° without honeycomb	432	900432206	900432209	900432207
		▲ 52° without honeycomb	409	900432216	900432219	900432217
		fascio	lm	aluminium	bronze	black
3000K	24V III	▲ 10° with honeycomb	253	900412436	900412439	900412437
5,8Wled		▲ 26° with honeycomb	264	900412036	900412039	900412037
6,3We		▲ 52° with honeycomb	142	900412046	900412049	900412047
		▲ 10° without honeycomb	422	900412446	900412449	900412447
		▲ 26° without honeycomb	455	900412206	900412209	900412207
		▲ 52° without honeycomb	431	900412216	900412219	900412217
		fascio	lm	aluminium	bronze	black
2700K	220-240V	▲ 10° with honeycomb	243	900431556	900431559	900431557
5,8Wled		▲ 26° with honeycomb	251	900431006	900431009	900431007
6,9We		▲ 52° with honeycomb	135	900431016	900431019	900431017
		▲ 10° without honeycomb	405	900431566	900431569	900431567
		▲ 26° without honeycomb	432	900431226	900431229	900431227
		▲ 52° without honeycomb	409	900431236	900431239	900431237
		fascio	lm	aluminium	bronze	black
3000K	220-240V	▲ 10° with honeycomb	253	900411556	900411559	900411557
5,8Wled		▲ 26° with honeycomb	264	900411006	900411009	900411007
6,9We		▲ 52° with honeycomb	142	900411016	900411019	900411017
		▲ 10° without honeycomb	422	900411566	900411569	900411567
		▲ 26° without honeycomb	455	900411226	900411229	900411227
		▲ 52° without honeycomb	431	900411236	900411239	900411237

Dx Ø54 Stem Spike h.70

10° | 26° | 52°



Available finishes:



aluminium

bronze

black

Light Source

Supply

Dimmer

CRI

IP rating

Electrical Class

Application

Diffuser

power led

24V / 220-240V

only 24V (PWM)

≥80

IP65

II, III

ground

transparent glass

Power

24V 5,8Wled - 6,3We

220-240V 5,8Wled - 6,9We

Led Colour temp.


2700K / 3000K



		fascio	lm	aluminium	bronze	black
2700K 5,8Wled 6,3We	24V III	▲ 10° with honeycomb	243	900432576	900432579	900432577
		▲ 26° with honeycomb	251	900432116	900432119	900432117
		▲ 52° with honeycomb	135	900432146	900432149	900432147
		▲ 10° without honeycomb	405	900432586	900432589	900432587
		▲ 26° without honeycomb	432	900432306	900432309	900432307
		▲ 52° without honeycomb	409	900432336	900432339	900432337
		fascio	lm	aluminium	bronze	black
3000K 5,8Wled 6,3We	24V III	▲ 10° with honeycomb	253	900412576	900412579	900412577
		▲ 26° with honeycomb	264	900412116	900412119	900412117
		▲ 52° with honeycomb	142	900412146	900412149	900412147
		▲ 10° without honeycomb	422	900412586	900412589	900412587
		▲ 26° without honeycomb	455	900412306	900412309	900412307
		▲ 52° without honeycomb	431	900412336	900412339	900412337
		fascio	lm	aluminium	bronze	black
2700K 5,8Wled 6,9We	220-240V	▲ 10° with honeycomb	243	900431576	900431579	900431577
		▲ 26° with honeycomb	251	900431026	900431029	900431027
		▲ 52° with honeycomb	135	900431056	900431059	900431057
		▲ 10° without honeycomb	405	900431586	900431589	900431587
		▲ 26° without honeycomb	432	900431366	900431369	900431367
		▲ 52° without honeycomb	409	900431396	900431399	900431397
		fascio	lm	aluminium	bronze	black
3000K 5,8Wled 6,9We	220-240V	▲ 10° with honeycomb	253	900411576	900411579	900411577
		▲ 26° with honeycomb	264	900411026	900411029	900411027
		▲ 52° with honeycomb	142	900411056	900411059	900411057
		▲ 10° without honeycomb	422	900411586	900411589	900411587
		▲ 26° without honeycomb	455	900411366	900411369	900411367
		▲ 52° without honeycomb	431	900411396	900411399	900411397

Dx Ø54 Stem Spike h.170

10° | 26° | 52°



Available finishes:



aluminium
bronze
black

Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
24V / 220-240V
only 24V (PWM)
≥80
IP65
II, III
ground
transparent glass

Power


24V 5,8Wled -6,3We
220-240V 5,8Wled - 6,9We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black
2700K 5,8Wled 6,3We	24V III	▲ 10° with honeycomb	243	900432596	900432599	900432597
		▲ 26° with honeycomb	251	900432126	900432129	900432127
		▲ 52° with honeycomb	135	900432156	900432159	900432157
		▲ 10° without honeycomb	405	900432606	900432609	900432607
		▲ 26° without honeycomb	432	900432316	900432319	900432317
		▲ 52° without honeycomb	409	900432346	900432349	900432347
		fascio	lm	aluminium	bronze	black
3000K 5,8Wled 6,3We	24V III	▲ 10° with honeycomb	253	900412596	900412599	900412597
		▲ 26° with honeycomb	264	900412126	900412129	900412127
		▲ 52° with honeycomb	142	900412156	900412159	900412157
		▲ 10° without honeycomb	422	900412606	900412609	900412607
		▲ 26° without honeycomb	455	900412316	900412319	900412317
		▲ 52° without honeycomb	431	900412346	900412349	900412347
		fascio	lm	aluminium	bronze	black
2700K 5,8Wled 6,9We	220-240V	▲ 10° with honeycomb	243	900431596	900431599	900431597
		▲ 26° with honeycomb	251	900431036	900431039	900431037
		▲ 52° with honeycomb	135	900431066	900431069	900431067
		▲ 10° without honeycomb	405	900431606	900431609	900431607
		▲ 26° without honeycomb	432	900431376	900431379	900431377
		▲ 52° without honeycomb	409	900431406	900431409	900431407
		fascio	lm	aluminium	bronze	black
3000K 5,8Wled 6,9We	220-240V	▲ 10° with honeycomb	253	900411596	900411599	900411597
		▲ 26° with honeycomb	264	900411036	900411039	900411037
		▲ 52° with honeycomb	142	900411066	900411069	900411067
		▲ 10° without honeycomb	422	900411606	900411609	900411607
		▲ 26° without honeycomb	455	900411376	900411379	900411377
		▲ 52° without honeycomb	431	900411406	900411409	900411407

Dx Ø54 Stem Spike h.510

10° | 26° | 52°

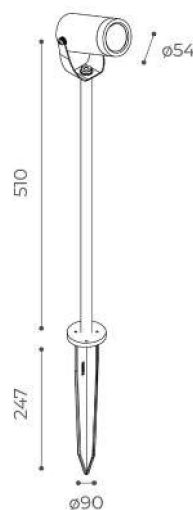

Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
24V / 220-240V
only 24V (PWM)
≥80
IP65
II, III
ground
transparent glass

Power


24V 5,8Wled -6,3We
220-240V 5,8Wled - 6,9We
Led Colour temp. 2700K / 3000K



		fascio	lm	aluminium	bronze	black
2700K 5,8Wled 6,3We	24V III	▲ 10° with honeycomb	243	900432616	900432619	900432617
		▲ 26° with honeycomb	251	900432136	900432139	900432137
		▲ 52° with honeycomb	135	900432166	900432169	900432167
		▲ 10° without honeycomb	405	900432626	900432629	900432627
		▲ 26° without honeycomb	432	900432326	900432329	900432327
		▲ 52° without honeycomb	409	900432356	900432359	900432357
		fascio	lm	aluminium	bronze	black
3000K 5,8Wled 6,3We	24V III	▲ 10° with honeycomb	253	900412616	900412619	900412617
		▲ 26° with honeycomb	264	900412136	900412139	900412137
		▲ 52° with honeycomb	142	900412166	900412169	900412167
		▲ 10° without honeycomb	422	900412626	900412629	900412627
		▲ 26° without honeycomb	455	900412326	900412329	900412327
		▲ 52° without honeycomb	431	900412356	900412359	900412357
		fascio	lm	aluminium	bronze	black
2700K 5,8Wled 6,9We	220-240V	▲ 10° with honeycomb	243	900431616	900431619	900431617
		▲ 26° with honeycomb	251	900431046	900431049	900431047
		▲ 52° with honeycomb	135	900431076	900431079	900431077
		▲ 10° without honeycomb	405	900431626	900431629	900431627
		▲ 26° without honeycomb	432	900431386	900431389	900431387
		▲ 52° without honeycomb	409	900431426	900431429	900431427
		fascio	lm	aluminium	bronze	black
3000K 5,8Wled 6,9We	220-240V	▲ 10° with honeycomb	253	900411616	900411619	900411617
		▲ 26° with honeycomb	264	900411046	900411049	900411047
		▲ 52° with honeycomb	142	900411076	900411079	900411077
		▲ 10° without honeycomb	422	900411626	900411629	900411627
		▲ 26° without honeycomb	455	900411386	900411389	900411387
		▲ 52° without honeycomb	431	900411426	900411429	900411427




ACCESSORIES




Power supply 8V 110-2240V IP54
44x46x26mm

code **9037**




Power supply 24V DC 70W IP67
267x79x52mm

code **9049**




Power supply 24V 16Watt IP20
118x52x26mm

code **9006**




Power supply 24V DC 150W IP67
267x79x52mm

code **9057**




Power supply 24V 20Watt IP20
103x67x21mm

code **9007**




Tube Frame
Ø54x35mm
colour **Black**

code **90157**




Power supply 24V 50Watt IP20
190x60x36mm

code **9008**




Eyelid Frame
Ø54x50mm
colour **Black**

code **90167**




Power supply 16W 110-240V IP65
125x61x31mm

code **9059**




2 way - 3 poles terminal block IP68
Ø23x66mm

code **9004**



SPD CL.I 12KV 320V UC max
40x57x20mm

code **9058**



3-4 way - 4 poles terminal block IP68
53x26x82mm

code **9005**

ACCESSORIES:

code **9037 / 9006 / 9007 / 9008 / 9059 / 9049 / 9057 / 9058 / 90157 / 90167 / 9004 / 9005**