



INSERT+ ZERO



Scan the QR-code for
the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

- Wall recessed luminaire, for indoor and outdoor, comprising:
- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
 - Inner satin toughened flat glass diffuser
 - Anti-ageing custom moulded silicone sealing gasket(s)
 - Built-in driver
 - Stainless steel locking hardware
 - Recessed box (503) included
 - The luminaire is suitable for through-wiring









INSERT+ ZERO


INSERT+ ZERO

IP65 - IK08



LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
4.5	I	-	80	4000	A29/M	-	530	142		304111	✓
4.5	I	-	80	3000	A29/M	-	511	125		304110	✓
4.5	I	-	80	4000	A29/M	-	530	142		304113	✓
4.5	I	-	80	3000	A29/M	-	511	125		304112	✓
4.5	I	-	80	4000	A29/M	-	530	142		304109	✓
4.5	I	-	80	3000	A29/M	-	511	125		304108	✓


INSERT+ ZERO CLIP

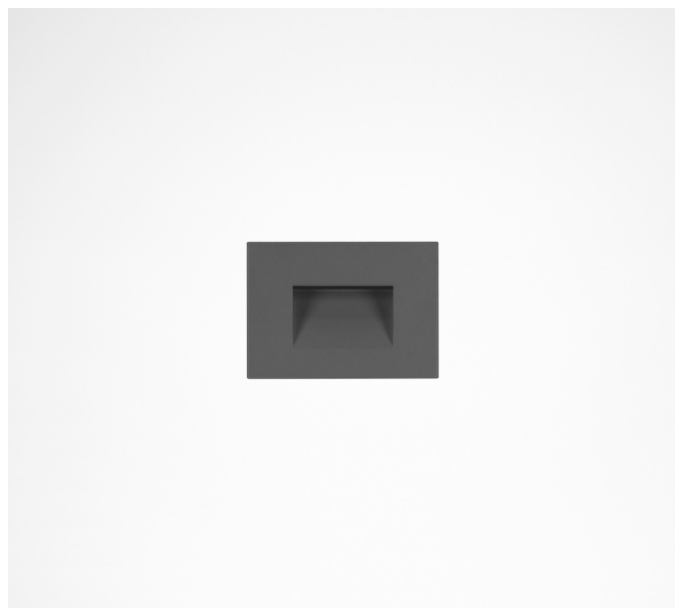




Scan the QR-code for
the latest information

- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

- Wall recessed luminaire, for indoor and outdoor, comprising:
- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
 - Inner satin toughened flat glass diffuser
 - Anti-ageing custom moulded silicone sealing gasket(s)
 - Stainless steel springs for quick connection to recessed box
 - Recessed box (503) included
 - No visible screws
 - The luminaire is suitable for through-wiring

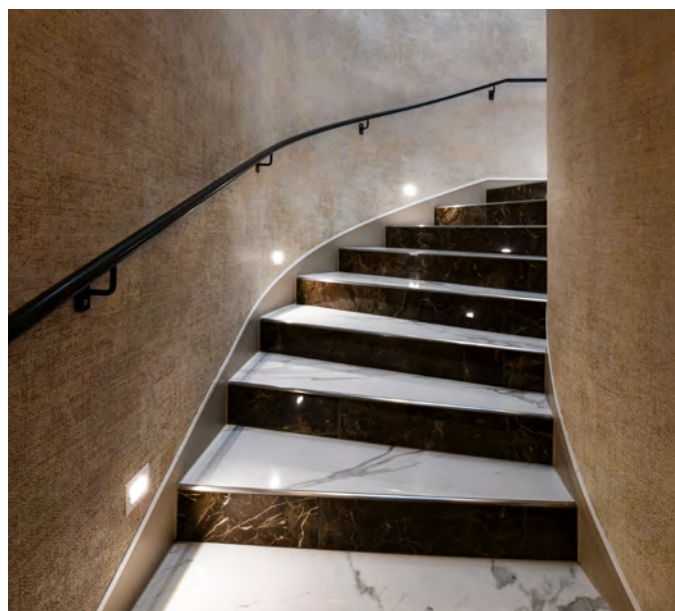

Private villa - Verona - Italy

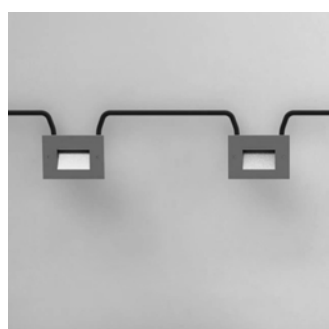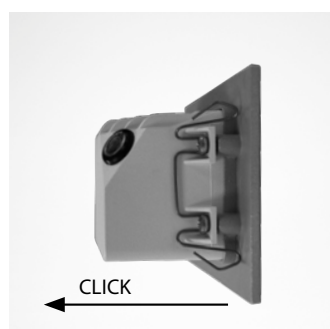







INSERT + ZERO CLIP


INSERT+ ZERO CLIP

IP65 - IK08



LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
4.5	I	-	80	3000	A/M	-	511	142		3100064	✓
4.5	I	-	80	2700	A/M	-	511	152		3115405	✓
4.5	I	-	80	3000	A/M	-	511	142		3100066	✓
4.5	I	-	80	2700	A/M	-	511	152		3111780	✓
4.5	I	-	80	3000	A/M	-	511	142		3100062	✓
4.5	I	-	80	2700	A/M	-	511	152		3115406	✓

INSERT+ ZERO GLASS



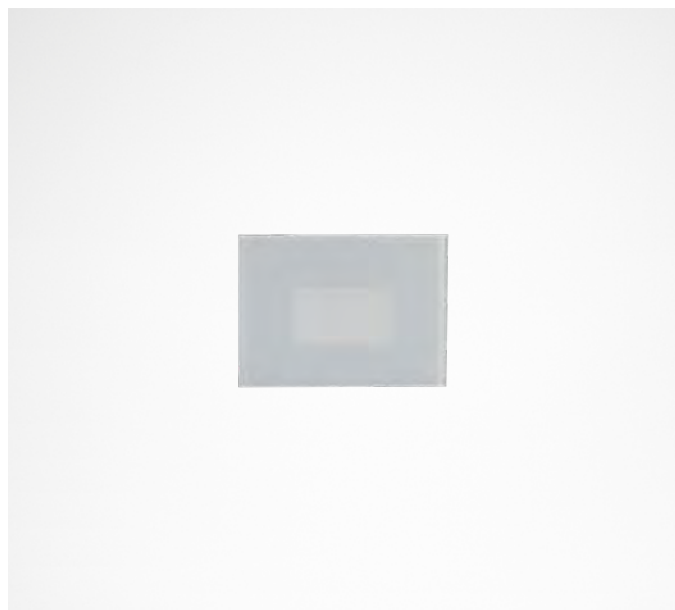


Scan the QR-code for
the latest information

☐ WH-87 / White / Textured

Wall recessed luminaire, for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Inner satin toughened flat glass diffuser
- Anti-ageing custom moulded silicone sealing gasket(s)
- Stainless steel springs for quick connection to recessed box
- Recessed box (503) included
- No visible screws
- The luminaire is suitable for through-wiring
- GLASS versions have a front diffuser in toughened and screen printed glass

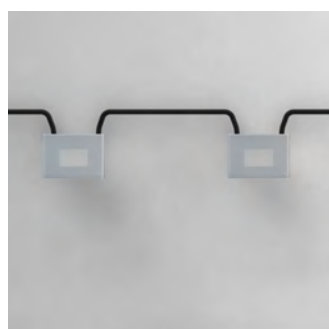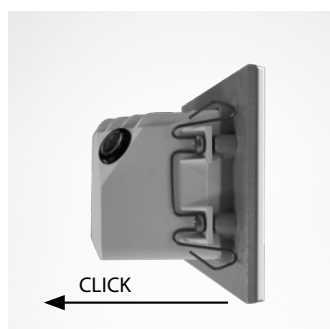

INSERT+ ZERO GLASS