


QUASAR 10

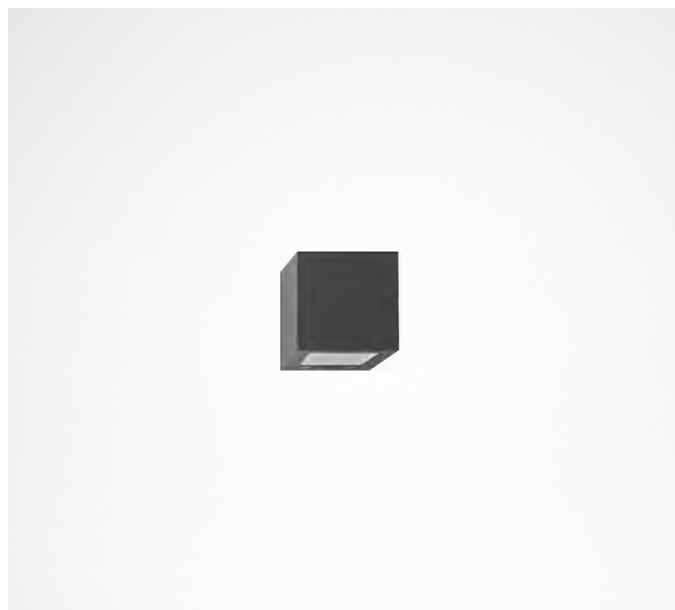

Scan the QR-code for
the latest information


- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured
- WH-87 / White / Textured

Wall-mounted LED luminaire, comprising:


- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Secured diffuser in printed transparent flat glass
- Foam polymer sealing gasket
- Stainless steel locking hardware
- Built-in driver
- Openable and maintainable luminaire (future-proof)



Private house - Andalusia - Spain



QUASAR 10 CEILING




QUASAR 10

QUASAR 10 1WB

IP44 - IK02


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
3.5	I	✓	80	4000	R	-	230	122		303355	✓
3.5	I	✓	80	3000	R	-	150	100		303354	✓
3.5	I	✓	80	4000	R	-	230	122		303357	✓
3.5	I	✓	80	3000	R	-	150	100		303356	✓
3.5	I	✓	80	3000	R	-	150	100		30335690104	✓
3.5	I	✓	80	4000	R	-	230	122		303451	✓
3.5	I	✓	80	3000	R	-	150	100		303450	✓



QUASAR 10 2WB

IP44 - IK02


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
6	I	✓	80	4000	R	-	460	235		303361	✓
6	I	✓	80	3000	R	-	300	192		303360	✓
6	I	✓	80	4000	R	-	460	235		303363	✓
6	I	✓	80	3000	R	-	300	192		303362	✓
6	I	✓	80	3000	R	-	300	192		30336290102	✓
6	I	✓	80	4000	R	-	460	235		303453	✓
6	I	✓	80	3000	R	-	300	192		303452	✓



QUASAR 10 1NB+1WB

IP44 - IK02

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
6	I	✓	80	4000	R	-	460	141		303367	✓
6	I	✓	80	3000	R	-	300	113		303366	✓
6	I	✓	80	4000	R	-	460	141		303369	✓
6	I	✓	80	3000	R	-	300	113		303368	✓
6	I	✓	80	4000	R	-	460	141		303455	✓
6	I	✓	80	3000	R	-	300	113		303454	✓



QUASAR 10 4WB

IP44 - IK02

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
10.5	I	✓	80	4000	R	-	920	402		303349	✓
10.5	I	✓	80	3000	R	-	600	329		303348	✓
10.5	I	✓	80	4000	R	-	920	402		303351	✓
10.5	I	✓	80	3000	R	-	600	329		303350	✓
10.5	I	✓	80	4000	R	-	920	402		303449	✓
10.5	I	✓	80	3000	R	-	600	329		303448	✓

