


# AMON MINI



■ AN-96 / Anthracite gray / Textured

Scan the QR-code for the latest information

Series of bollards, comprising:


- Extruded aluminium profile housing, powder-coated ISO 9227/12944 - ISO 9223 (C5)
- UV stabilised polycarbonate satin diffuser (SOFT versions)
- Extra-clear, toughened, flat glass diffuser, silk-screened on the inside
- Coated die-cast aluminium optical compartment
- Extra pure polished aluminium reflector
- Anti-ageing custom moulded silicone sealing gasket(s)
- Electrical connection via junction box
- Built-in driver
- Stainless steel locking hardware
- Coated die-cast aluminium cabling compartment
- Integral surge protection device (SPD) against mains overvoltages up to 10 kV (CM/DM)
- Floor mounting steel base plate included
- Heavy-duty die-cast aluminium base cover available as accessory (ordered separately)
- Stainless steel bolt-on root for concrete anchoring available as accessory (ordered separately)
- Dimmable DALI options available. Consult factory
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory



AMON WALL





AMON MAXI

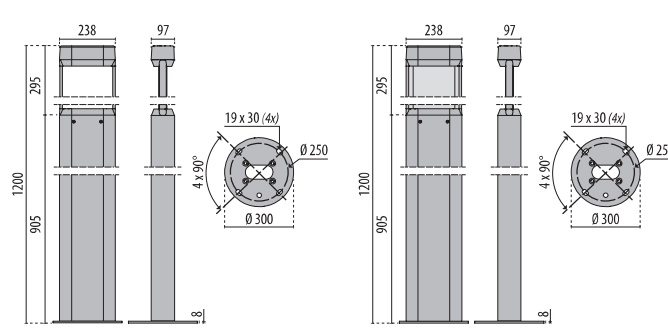

AMON MINI

AMON MINI  
SOFT

Identifying and classifying our optics



## AMON MINI S/W

IP65 - IK09 - 650 °C

| LUMINAIRE<br>WATTAGE [W]                     | CLASS | ENEC | CRI | KELVIN | OPTIC | BEAM ANGLE | LIGHTSOURCE LUMEN<br>OUTPUT [lm] | LUMINAIRE LUMEN<br>OUTPUT [lm] | COLOR/<br>FINISH | PART NUMBER   | UKCA |
|----------------------------------------------|-------|------|-----|--------|-------|------------|----------------------------------|--------------------------------|------------------|---------------|------|
| Power LED dimmable 1-10 V 220-240 V 50/60 Hz |       |      |     |        |       |            |                                  |                                |                  |               |      |
| 40                                           | I     | -    | 80  | 4000   | S/W   | -          | 5046                             | 2021                           | ■                | <b>306059</b> | ✓    |



## AMON MINI SOFT S/EW


IP65 - IK07 - 650 °C

| LUMINAIRE<br>WATTAGE [W]                     | CLASS | ENEC | CRI | KELVIN | OPTIC | BEAM ANGLE | LIGHTSOURCE LUMEN<br>OUTPUT [lm] | LUMINAIRE LUMEN<br>OUTPUT [lm] | COLOR/<br>FINISH | PART NUMBER   | UKCA |
|----------------------------------------------|-------|------|-----|--------|-------|------------|----------------------------------|--------------------------------|------------------|---------------|------|
| Power LED dimmable 1-10 V 220-240 V 50/60 Hz |       |      |     |        |       |            |                                  |                                |                  |               |      |
| 40                                           | I     | -    | 80  | 4000   | S/EW  | -          | 5046                             | 1359                           | ■                | <b>306061</b> | ✓    |



## Optional accessories


| DESCRIPTION                  | COLOR | PART NUMBER   | UKCA |
|------------------------------|-------|---------------|------|
| <b>AMON MINI</b>             |       |               |      |
| AMON groundplate cover       | ■     | <b>310921</b> | ✓    |
| Flange plate with fixing rod |       | <b>310922</b> | ✓    |
| Steel bolt-on root           |       | <b>310923</b> | ✓    |



**310921**



**310922**



**310923**