
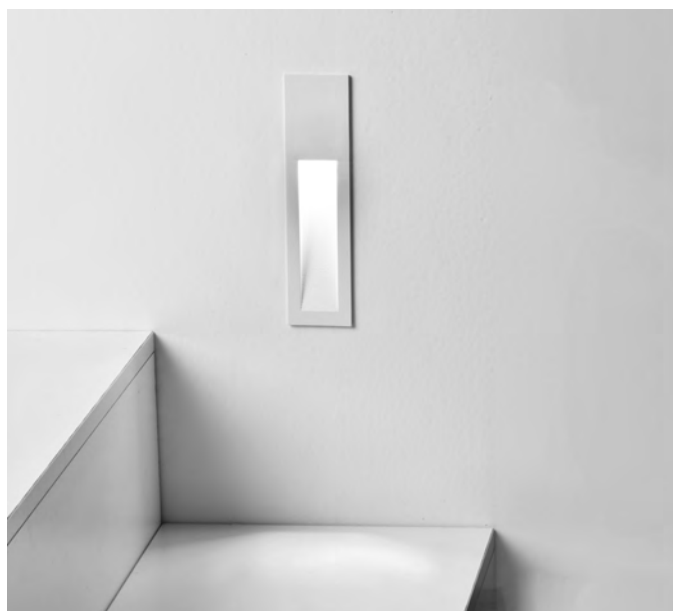


INSERT+ 1/2 V

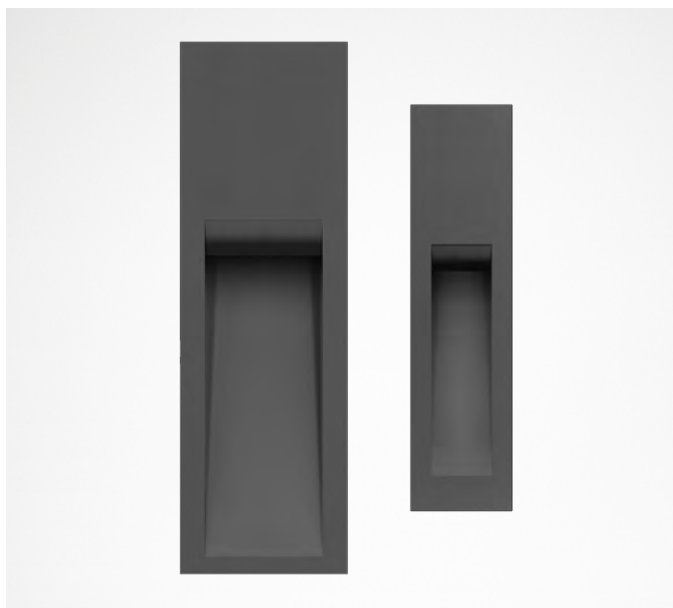


Scan the QR-code for
the latest information


- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Series of wall recessed luminaires for indoor and outdoor ,comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Inner satin toughened flat glass diffuser
- Anti-ageing custom moulded silicone sealing gasket(s)
- Stainless steel springs for quick connection to recessed box
- No visible screws
- Driver On Board 220-240V 50/60Hz LED module protected against surges up to 500 V
- Use of protection against voltage surges that may be on the electrical line is recommended in order to protect the appliances
- Recessed box to be ordered separately
- The recessed box removable cover features two integral spirit levels for installation ease
- Available for thorough wiring as accessories. Connectors fit Ø 7 - Ø 10,5 mm and Ø 14 - Ø 17 mm cables



INSERT+
1 V



INSERT+
2 V

INSERT+ 1 V

IP65 - IK06

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
4	I	-	80	4000	A/EW	-	418	197		3118537	✓
4	I	-	80	3000	A/EW	-	377	184		3118534	✓
4	I	-	80	4000	A/EW	-	418	197		3118536	✓
4	I	-	80	3000	A/EW	-	377	184		3118445	✓
4	I	-	80	4000	A/EW	-	418	197		3118535	✓
4	I	-	80	3000	A/EW	-	377	184		3118444	✓



INSERT+ 2 V

IP65 - IK07

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
9	I	-	80	4000	A/EW	-	1318	634		3118198	✓
9	I	-	80	3000	A/EW	-	1197	592		3118195	✓
9	I	-	80	4000	A/EW	-	1318	634		3118197	✓
9	I	-	80	3000	A/EW	-	1197	592		3118194	✓
9	I	-	80	4000	A/EW	-	1318	634		3118196	✓
9	I	-	80	3000	A/EW	-	1197	592		3118193	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
9	I	-	80	4000	A/EW	-	1318	634		3118204	✓
9	I	-	80	3000	A/EW	-	1197	592		3118201	✓
9	I	-	80	4000	A/EW	-	1318	634		3118203	✓
9	I	-	80	3000	A/EW	-	1197	592		3118200	✓
9	I	-	80	4000	A/EW	-	1318	634		3118202	✓
9	I	-	80	3000	A/EW	-	1197	592		3118199	✓



Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
INSERT+ 1 V			
Recessed box INSERT+ 1		310475	✓
INSERT+ 2 V			
Recessed box Insert + 2		310490	✓



310475



310490

Optional accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
INSERT+ 1/2 V			
Connection Kit Y 3-way Ø 7-10.5 mm IP68		310496	✓
Connection Kit Y 3-way Ø 14-17 mm IP68		310495	✓



310495
310496