


GUELL 3



■ GR-94 / Metallic grey / Textured

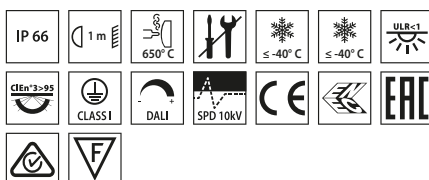


Scan the QR-code for the latest information

LED floodlight for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra clear, toughened, flat glass diffuser
- High-performance polished, oxidised, iridescence-free, aluminium reflector (Al 99.99)
- Anti-ageing custom moulded silicone sealing gasket(s)
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- High asymmetrical distributions low-glare optic options available (A50/W versions)
- Stainless steel locking hardware
- Fully integrated stainless steel aluminium spring clips
- Powder-coated steel tiltable bracket
- Integral surge protection device (SPD) against mains overvoltages up to 10 kV (CM/DM)
- Openable and maintainable luminaire (future-proof)
- Consult factory for dimmable DALI versions with remote supply unit, up to a 50-metre maximum distance (A50 / W models only)
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory
- Design by GIORGIO LODI




IJssink De Meent - Alkmaar - Netherlands



GUELL 3

Identifying and classifying our optics

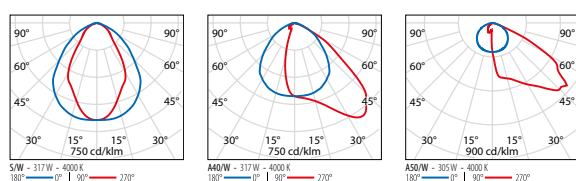

GUELL 3 S/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
291	I	-	80	4000	S/W	-	43015	38812	■	3116972	✓
291	I	-	80	3000	S/W	-	40972	37254	■	3116975	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
291	I	-	80	4000	S/W	-	43015	38812	■	3116974	✓
291	I	-	80	3000	S/W	-	40972	37254	■	3116977	✓



GUELL 3 A/W

IP66 - IK07 - 650 °C

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
291	I	-	80	4000	A40/W	-	43015	36328	■	3116963	✓
291	I	-	80	3000	A40/W	-	40972	34875	■	3116966	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
291	I	-	80	4000	A40/W	-	43015	36328	■	3116965	✓
291	I	-	80	3000	A40/W	-	40972	34875	■	3116968	✓



GUELL 3 A50/W


IP66 - IK07

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
305	I	✓	80	4000	A50/W	-	48341	35814	■	306114	✓
305	I	✓	80	3000	A50/W	-	43200	34346	■	3109685	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
305	I	-	80	4000	A50/W	-	48341	35814	■	306120	✓
305	I	✓	80	3000	A50/W	-	43200	34346	■	3103871	✓
231	I	-	80	4000	A50/W	-	36256	27496	■	306122	✓
231	I	-	80	3000	A50/W	-	28800	26145	■	3114365	✓



Optional accessories


DESCRIPTION	COLOR	PART NUMBER	UKCA
GUELL 3			
Protective grid		14452702	✓
Wall mount support 1000 mm	■	14453994	✓
Single pole top support GUELL 3 for poles Ø 60-76 mm/Ø 2.36"-2.99"	■	14453794	✓
Double pole top support GUELL 3 for poles Ø 60-76 mm/Ø 2.36"-2.99"	■	14453894	✓
GUELL 3 strengthening bracket. Suitable for one floodlight single point fixing M10 screw in centre of the bracket	■	14461104	✓
GUELL 3 S/W			
Louvre GUELL 3 Symmetrical		14454220	✓
GUELL 3 A/W			
Louvre A40/W	■	14452894	✓
Louvre GUELL 3-4 A50/W	■	3102585	✓
GUELL 3 A/W - S/W			
Frosted glass GUELL 3	■	14452994	✓




14452702




14453994




14453794




14453894




14461104



14454220



14452894
3102585



14452994