


CRICKET+ 20

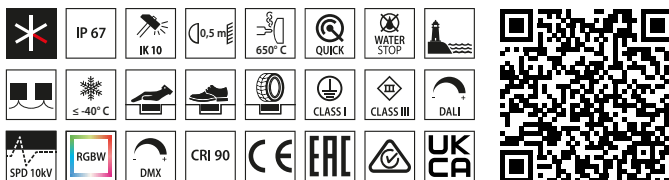


- AN-96 / Anthracite gray / Textured
- INOX / Stainless steel / Matt


Scan the QR-code for the latest information

Series of reduced depth in-ground luminaires, comprising:

- Black painted anodised die-cast aluminium housing
- High-transparency polycarbonate optics
- Aluminium heat sink
- Anti-ageing custom moulded silicone sealing gasket(s) with resilient elastic return capacity
- Extra clear, toughened, flat glass diffuser
- Die-cast aluminium trim powder-coated
- Die-cast aluminium trim, powder-coated, covered with AISI 316 stainless steel (stainless steel options)
- Mains connection through waterproof connection system (WATER-STOP)
- Stainless steel locking hardware
- Technopolymer recess box to be ordered separately
- Floor mounted luminaires are usually subject to harsh conditions. For proper use and safety, they must be correctly installed by qualified personnel and according to the manual instructions
- Do not install luminaires in sunken areas
- Static ON/OFF or dimmable DALI options available
- For more RGBW options consult factory
- The RGBW versions to be powered with 48V DC SELV drivers, available as accessories. Colour management through DMX interface
- DMX signal generator for RGBW versions available (ordered separately)






CRICKET+ 20



CRICKET+ 20
(3111135)

Identifying and classifying our optics



CRICKET+ 20 A/M

IP67 - IK10 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
26	I	-	90	2700	A5/M	-	3195	1570	■	3111900	✓
26	I	-	90	2700	A5/M	-	3195	1570	■	3111897	✓
26	I	-	80	4000	A5/M	-	2940	1916	■	3108377	✓
26	I	-	80	3000	A5/M	-	2724	1793	■	3108378	✓
26	I	-	80	4000	A5/M	-	2940	1916	■	3108371	✓
26	I	-	80	3000	A5/M	-	2724	1793	■	3108372	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
26	I	-	90	2700	A5/M	-	3195	1570	■	3111906	✓
26	I	-	90	2700	A5/M	-	3195	1570	■	3111903	✓
26	I	-	80	4000	A5/M	-	2940	1916	■	3108389	✓
26	I	-	80	3000	A5/M	-	2724	1793	■	3108390	✓
26	I	-	80	4000	A5/M	-	2940	1916	■	3108383	✓
26	I	-	80	3000	A5/M	-	2724	1793	■	3108384	✓



CRICKET+ 20 C/I

IP67 - IK10 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
26	I	-	90	2700	C/I	-	3195	1907	■	3111901	✓
26	I	-	90	2700	C/I	-	3195	1907	■	3111898	✓
26	I	-	80	4000	C/I	-	2940	2326	■	3108381	✓
26	I	-	80	3000	C/I	-	2724	2177	■	3108382	✓
26	I	-	80	4000	C/I	-	2940	2326	■	3108375	✓
26	I	-	80	3000	C/I	-	2724	2177	■	3108376	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
26	I	-	90	2700	C/I	-	3195	1907	■	3111907	✓
26	I	-	90	2700	C/I	-	3195	1907	■	3111904	✓
26	I	-	80	4000	C/I	-	2940	2326	■	3108393	✓
26	I	-	80	3000	C/I	-	2724	2177	■	3108394	✓
26	I	-	80	4000	C/I	-	2940	2326	■	3108387	✓
26	I	-	80	3000	C/I	-	2724	2177	■	3108388	✓



CRICKET+ 20 C/M

IP67 - IK10 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
26	I	-	90	2700	C/M	-	3195	2078	■	3111902	✓
26	I	-	90	2700	C/M	-	3195	2078	■	3111899	✓
26	I	-	80	4000	C/M	-	2940	2536	■	3108379	✓
26	I	-	80	3000	C/M	-	2794	2373	■	3108380	✓
26	I	-	80	4000	C/M	-	2940	2536	■	3108373	✓
26	I	-	80	3000	C/M	-	2794	2373	■	3108374	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
26	I	-	90	2700	C/M	-	3195	2078	■	3111908	✓
26	I	-	90	2700	C/M	-	3195	2078	■	3111905	✓
26	I	-	80	4000	C/M	-	2940	2536	■	3108391	✓
26	I	-	80	3000	C/M	-	2794	2373	■	3108392	✓
26	I	-	80	4000	C/M	-	2940	2536	■	3108385	✓
26	I	-	80	3000	C/M	-	2794	2373	■	3108386	✓



CRICKET+ 20 RGBW C/M

IP67 - IK10 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
RGBW LED											
16.5	III	-	80	rgbw 4000	C/M	30°	1150	538	■	3112199	✓
16.5	III	-	80	rgbw 4000	C/M	30°	1150	538	■	3112198	✓



Control gear

DESCRIPTION	COLOR	PART NUMBER	UKCA
CRICKET+ 20 RGBW			
Driver - CV 100 W - 48 V kit		310950	✓
Driver - CV 500 W - 48 V kit		310951	✓
Controller DMX touch white		3117844	✓
Controller DMX touch black		3117845	✓
USB key EcoEcco		3115612	✓



310950



310951



3117844




3117845



3115612

Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
CRICKET+ 20			
Recessed fixing kit		3111135	✓



3111135



St. Sauveur-le-Vicomte Castle - France