


MIMIK 20

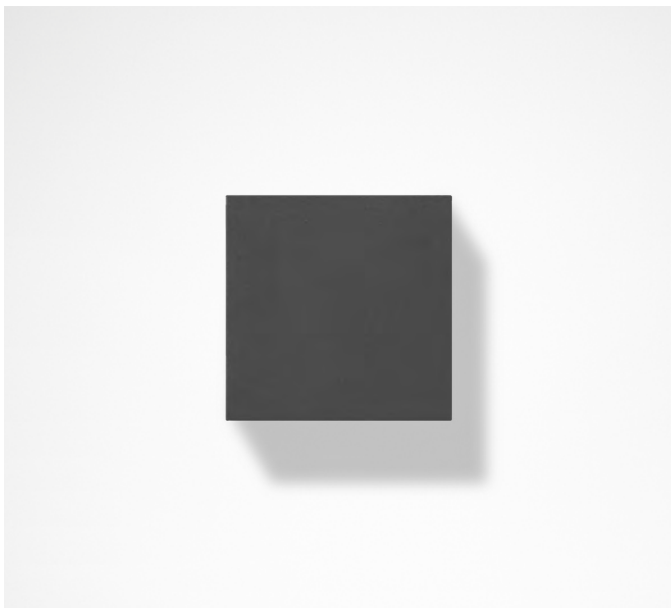

Scan the QR-code for
the latest information



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Wall-mounted LED luminaire, comprising:


- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Anti-ageing custom moulded silicone sealing gasket(s)
- Microprismatic, toughened, flat glass diffuser, silk-screened on the inside (MIMIK FLAT versions)
- Single (M) and dual (B) emission versions available
- Extra-clear, toughened, flat glass diffuser, silk-screened on the inside (MIMIK models)
- MIMIK models are equipped with high-transmittance polycarbonate optics with different light distributions to meet a large variety of lighting schemes
- Optimised asymmetric distribution for wide spacing and lighting-class levels matching (CP options)
- Built-in driver
- Stainless steel locking hardware
- EM/1P are maintained emergency versions (1h)
- EM/3P version is designed for multipurpose 3 hours sustained emergency lighting
- Openable and maintainable luminaire (future-proof)




Private Villa - Verona - Italy



MIMIK 20 CEILING




MIMIK 20
FLAT



MIMIK 20


Identifying and classifying our optics

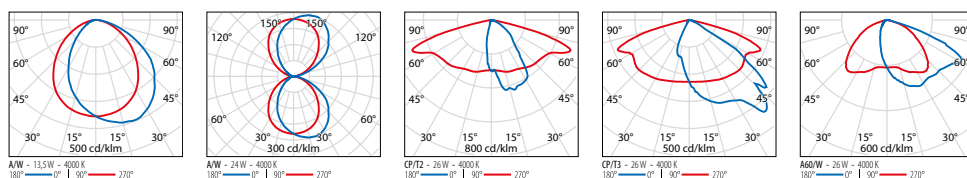

MIMIK 20 FLAT M

IP65 - IK06


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
12	I	-	80	4000	A/W	-	1710	1273		303744	✓
12	I	-	80	3000	A/W	-	1653	1230		303746	✓
12	I	-	80	4000	A/W	-	1710	1273		303745	✓
12	I	-	80	3000	A/W	-	1653	1230		303747	✓
12	I	-	80	4000	A/W	-	1710	1273		303795	✓
12	I	-	80	3000	A/W	-	1653	1230		303842	✓



MIMIK 20 FLAT M EM1P

IP65 - IK06


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - emergency 1h - 220-240 V 50/60 Hz											
12	I	-	80	4000	A/W	-	1710	1273		304201	✓
12	I	-	80	3000	A/W	-	1653	1230		304198	✓
12	I	-	80	4000	A/W	-	1710	1273		304202	✓
12	I	-	80	3000	A/W	-	1653	1230		304199	✓
12	I	-	80	4000	A/W	-	1710	1273		304203	✓
12	I	-	80	3000	A/W	-	1653	1230		304200	✓



MIMIK 20 FLAT B

IP65 - IK06


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
22.5	I	-	80	4000	A/W	-	3420	2516		303748	✓
22.5	I	-	80	3000	A/W	-	3306	2435		303750	✓
22.5	I	-	80	4000	A/W	-	3420	2516		303749	✓
22.5	I	-	80	3000	A/W	-	3306	2435		303751	✓
22.5	I	-	80	4000	A/W	-	3420	2516		303797	✓
22.5	I	-	80	3000	A/W	-	3306	2435		303794	✓



MIMIK 20 CP/T2

IP65 - IK06


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
26	I	✓	70	4000	CP/T2	-	3360	2384		303752	✓
26	I	✓	70	3000	CP/T2	-	3120	2346		303754	✓
26	I	✓	70	4000	CP/T2	-	3360	2384		303753	✓
26	I	✓	70	3000	CP/T2	-	3120	2346		303755	✓
26	I	✓	70	4000	CP/T2	-	3360	2384		303841	✓
26	I	✓	70	3000	CP/T2	-	3120	2346		303840	✓
21	I	✓	70	4000	CP/T2	-	2453	2005		304419	✓
21	I	✓	70	3000	CP/T2	-	2278	1973		304416	✓
21	I	✓	70	4000	CP/T2	-	2453	2005		304420	✓
21	I	✓	70	3000	CP/T2	-	2278	1973		304417	✓
21	I	✓	70	4000	CP/T2	-	2453	2005		304421	✓
21	I	✓	70	3000	CP/T2	-	2278	1973		304418	✓



MIMIK 20 CP/T2 EM3P

IP65 - IK06


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - Emergency 3h - 220-240 V 50/60 Hz											
21	I	-	70	4000	CP/T2	-	2453	2005		304395	✓
21	I	-	70	3000	CP/T2	-	2278	1973		304394	✓
21	I	-	70	4000	CP/T2	-	2453	2005		304397	✓
21	I	-	70	3000	CP/T2	-	2278	1973		304396	✓
21	I	-	70	4000	CP/T2	-	2453	2005		304399	✓
21	I	-	70	3000	CP/T2	-	2278	1973		304398	✓



MIMIK 20 CP/T3

IP65 - IK06


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
26	I	✓	70	4000	CP/T3	-	3360	2401		303756	✓
26	I	✓	70	3000	CP/T3	-	3120	2364		303758	✓
26	I	✓	70	4000	CP/T3	-	3360	2401		303757	✓
26	I	✓	70	3000	CP/T3	-	3120	2364		303759	✓
26	I	✓	70	4000	CP/T3	-	3360	2401		303733	✓
26	I	✓	70	3000	CP/T3	-	3120	2364		303734	✓
21	I	✓	70	4000	CP/T3	-	2453	2012		304425	✓
21	I	✓	70	3000	CP/T3	-	2278	1988		304422	✓
21	I	✓	70	4000	CP/T3	-	2453	2012		304426	✓
21	I	✓	70	3000	CP/T3	-	2278	1988		304423	✓
21	I	✓	70	4000	CP/T3	-	2453	2012		304427	✓
21	I	✓	70	3000	CP/T3	-	2278	1988		304424	✓



MIMIK 20 CP/T3 EM3P

IP65 - IK06


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - Emergency 3h - 220-240 V 50/60 Hz											
21	I	-	70	4000	CP/T3	-	2453	2012		304401	✓
21	I	-	70	3000	CP/T3	-	2278	1988		304400	✓
21	I	-	70	4000	CP/T3	-	2453	2012		304403	✓
21	I	-	70	3000	CP/T3	-	2278	1988		304402	✓
21	I	-	70	4000	CP/T3	-	2453	2012		304405	✓
21	I	-	70	3000	CP/T3	-	2278	1988		304404	✓



MIMIK 20 A60/W

IP65 - IK06


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
26	I	✓	70	4000	A60/W	-	3360	2183		303760	✓
26	I	✓	70	3000	A60/W	-	3120	2149		303762	✓
26	I	✓	70	4000	A60/W	-	3360	2183		303761	✓
26	I	✓	70	3000	A60/W	-	3120	2149		303763	✓
26	I	✓	70	4000	A60/W	-	3360	2183		303735	✓
26	I	✓	70	3000	A60/W	-	3120	2149		303736	✓
21	I	✓	70	4000	A60/W	-	2453	1836		304431	✓
21	I	✓	70	3000	A60/W	-	2278	1807		304428	✓
21	I	✓	70	4000	A60/W	-	2453	1836		304432	✓
21	I	✓	70	3000	A60/W	-	2278	1807		304429	✓
21	I	✓	70	4000	A60/W	-	2453	1836		304433	✓
21	I	✓	70	3000	A60/W	-	2278	1807		304430	✓



MIMIK 20 A60/W EM3P

IP65 - IK06

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - Emergency 3h - 220-240 V 50/60 Hz											
21	I	-	70	4000	A60/W	-	2453	1836		304407	✓
21	I	-	70	3000	A60/W	-	2278	1807		304406	✓
21	I	-	70	4000	A60/W	-	2453	1836		304409	✓
21	I	-	70	3000	A60/W	-	2278	1807		304408	✓
21	I	-	70	4000	A60/W	-	2453	1836		304411	✓
21	I	-	70	3000	A60/W	-	2278	1807		304410	✓




Optional accessories

Complete unit

1A+1B = please order 2 codes

COMPONENTS	
A	luminaire
B	customising ring

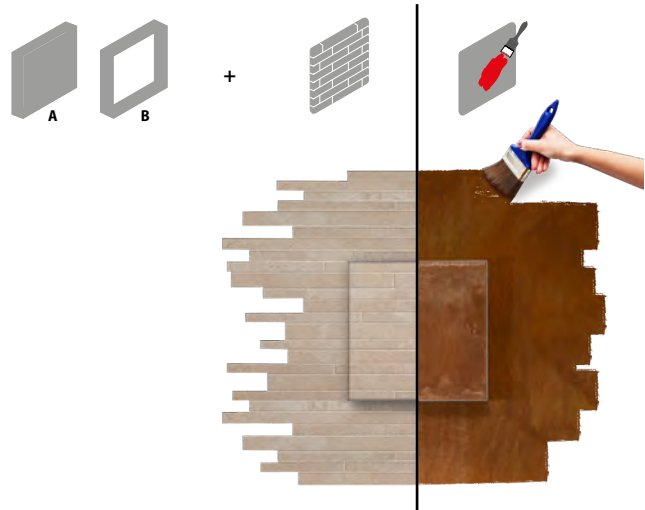

DESCRIPTION	COLOR	PART NUMBER	UKCA
MIMIK FLAT M			
FLAT M Customising ring / Facade Accessory	■	310440	✓
FLAT M Customising ring / Facade Accessory	■	310441	✓
FLAT M Customising ring / Facade Accessory	□	310450	✓
MIMIK FLAT B			
FLAT B Customising ring / Facade Accessory	■	310442	✓
FLAT B Customising ring / Facade Accessory	■	310443	✓
FLAT B Customising ring / Facade Accessory	□	310451	✓
MIMIK CP/T2 - CP/T3 - A6o/W			
Customising ring / Facade Accessory	■	310444	✓
Customising ring / Facade Accessory	■	310445	✓
Customising ring / Facade Accessory	□	310449	✓

