

GUELL 4



Scan the QR-code for the latest information



■ GR-94 / Metallic grey / Textured

LED floodlight for indoor and outdoor, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Extra clear, toughened, flat glass diffuser
- High-performance polished, oxidised, iridescence-free, aluminium reflector (Al 99.99)
- Anti-ageing custom moulded silicone sealing gasket(s)
- Technopolymer electrical connection box
- Cable gland for cables Ø 7 - Ø 17 mm
- High asymmetrical distributions low-glare optic options available (A50/W versions)
- Stainless steel locking hardware
- Fully integrated stainless steel aluminium spring clips
- Galvanised powder-coated steel bracket
- Polyester polyester powder coat steel sheet gear housing
- Integral surge protection device (SPD) against mains overvoltages up to 10 kV (CM/DM)
- Openable and maintainable luminaire (future-proof)
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory
- Consult factory for dimmable DALI versions with remote supply unit, up to a 50-metre maximum distance (A50 / W models only)
- Design by GIORGIO LODI




Schierker Feuerstein arena - Wernigerode - Germany



GUELL 4

Identifying and classifying our optics

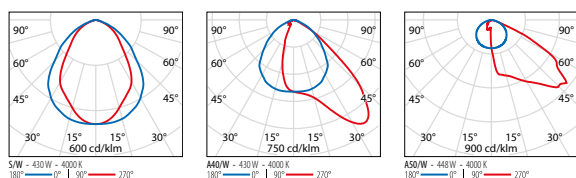

GUELL 4 A/W

IP66 - IK07

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - dimmable DALI 220-240 V 50/60 Hz											
428	I	-	80	4000	A40/W	-	62472	50539	■	3117452	✓
428	I	-	80	3000	A40/W	-	59100	47624	■	3117450	✓

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

428	I	-	80	4000	A40/W	-	62472	50539	■	3117451	✓
428	I	-	80	3000	A40/W	-	59100	47624	■	3117449	✓

5000K versions are available on web



GUELL 4 S/W

IP66 - IK07

LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - dimmable DALI 220-240 V 50/60 Hz											
428	I	-	80	4000	S/W	-	62472	55187	■	3117458	✓
428	I	-	80	3000	S/W	-	59100	50539	■	3117456	✓

Power LED dimmable 1-10 V 220-240 V 50/60 Hz

428	I	-	80	4000	S/W	-	62472	55187	■	3117457	✓
428	I	-	80	3000	S/W	-	59100	50539	■	3117455	✓

5000K versions are available on web



GUELL 4 A50/W

IP66 - IK07


LUMINAIRE WATTAGE [W]	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT [lm]	LUMINAIRE LUMEN OUTPUT [lm]	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - dimmable DALI 220-240 V 50/60 Hz											
448	I	-	80	4000	A50/W	-	72511	52346	■	306128	✓

5000K versions are available on web




Optional accessories


DESCRIPTION	COLOR	PART NUMBER	UKCA
GUELL 4 A/W - S/W			
Vetro soft GUELL 4	■	14465794	✓
GUELL 4 A/W			
Louvre A40/W	■	14452894	✓
Louvre GUELL 3-4 A50/W	■	3102585	✓
GUELL 4			
Protective grid		14452702	✓



14465794



14452894
3102585



14452702