


MULTI+ 40 PC

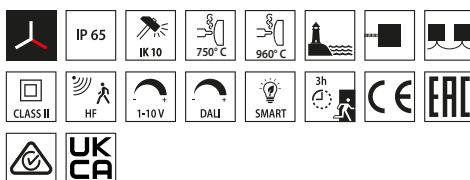

☐ WH-87 / White / Textured


Scan the QR-code for the latest information

Series of wall and ceiling mounted luminaires for indoor and outdoor use, comprising:



- Technopolymer housing
- Technopolymer vandal-proof opal diffuser, 960°C glow wire test rated
- Anti-ageing custom moulded silicone sealing gasket(s)
- Stainless steel, anti-tampering locking screws
- Through-wiring designed
- Class II
- Built-in driver
- Integral, tiltable, self-heat dissipating, Metal-Core SMD LED board (future proof)
- EM/3P version is designed for multipurpose 3 hours sustained emergency lighting
- Max 20 mm diameter for cable/conduit entry
- Hyper-frequency (HF) sensor operating at 5.8 Ghz +/- 75 Mhz
- SMART versions are equipped with customised electronic devices that allow energy savings reducing the luminous flux, whilst providing a 30% working flux for safety lighting and reaching 100% flux when necessary
- SMART HF versions are complete with integrated High Frequency (HF) sensor that operates from 30% up to 100% of the flux when it detects the presence of people
- SMART DA versions are suitable for use in systems with two separate lines where the demand for 100% of the flux is managed by a push button or line sensor



Residential building de Bever - Heerhugowaard - Netherlands



MULTI+ 40 PC

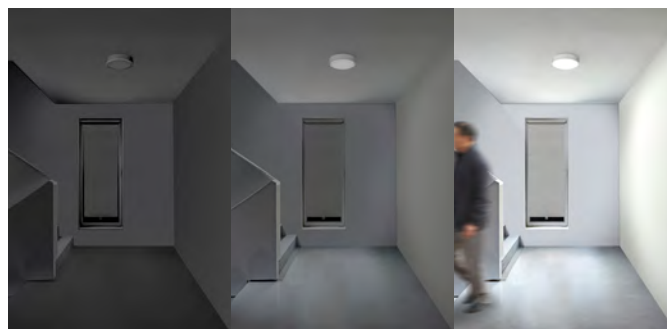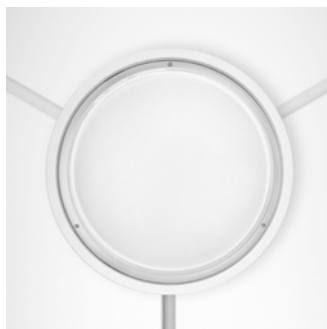

OFF
0%

ON - SMART
30%

ON - SMART
100%

MULTI+ 40 PC

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
27	II	-	80	4000	S/EW	-	4284	2278		304127	✓
27	II	-	80	3000	S/EW	-	4141	2146		304126	✓
19.5	II	-	80	4000	S/EW	-	3121	1502		304141	✓
19.5	II	-	80	3000	S/EW	-	3017	1464		304140	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
27	II	-	80	4000	S/EW	-	4284	2278		304131	✓
27	II	-	80	3000	S/EW	-	4141	2146		304130	✓
Power LED dimmable 1-10 V 220-240 V 50/60 Hz											
27	II	-	80	4000	S/EW	-	4284	2278		304129	✓
27	II	-	80	3000	S/EW	-	4141	2146		304128	✓



MULTI+ 40 PC SMART HF

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 230 V 50 Hz											
27	II	-	80	4000	S/EW	-	4284	2278		304211	✓
27	II	-	80	3000	S/EW	-	4141	2146		304210	✓



MULTI+ 40 PC HF

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 230 V 50 Hz											
27	II	-	80	4000	S/EW	-	4284	2278		304135	✓
27	II	-	80	3000	S/EW	-	4141	2146		304134	✓



MULTI+ 40 PC SMART DA

IP65 - IK10 - 750 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
27	II	-	80	4000	S/EW	-	4284	2278		304209	✓
27	II	-	80	3000	S/EW	-	4141	2146		304208	✓



MULTI+ 40 PC EM/3P

IP65 - IK10 - 960 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - Emergency 3h - 220-240 V 50/60 Hz											
19.5	II	-	80	4000	S/EW	-	3121	1502		304139	✓
19.5	II	-	80	3000	S/EW	-	3017	1464		304138	✓



Optional accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
MULTI+ 40 PC			
Tool TORX		310514	✓



310514