


BLIZ SQUARE 40



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

- Series of wall and ceiling mounted luminaires for indoor and outdoor use, comprising:
- Die-cast aluminium housing and trim, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
 - Pressed glass diffuser, internally coated
 - Anti-ageing custom moulded silicone sealing gasket(s)
 - Through-wiring designed
 - 4000K and 3000K mid-power LED board
 - Built-in driver
 - Stainless steel locking hardware
 - Static ON/OFF or dimmable DALI options available
 - EM/3P version is designed for multipurpose 3 hours sustained emergency lighting

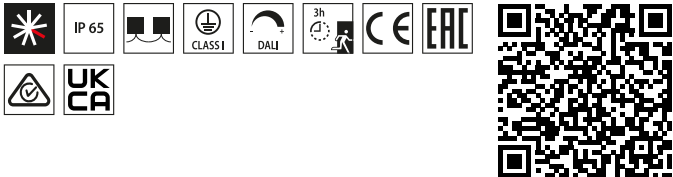


Abessinio stadium - Wilmington - Delaware - USA



BLIZ



BLIZ POST

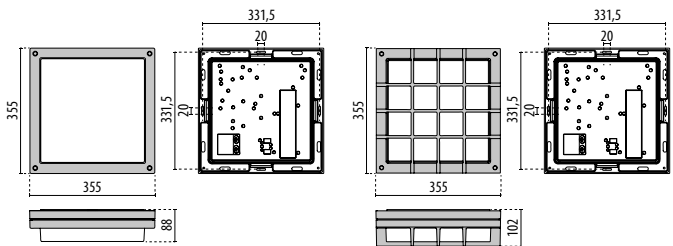

BLIZ SQUARE 40

BLIZ SQUARE 40
/G

BLIZ SQUARE 40

IP65 - IK07

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
39	I	-	80	4000	S/EW	-	6732	2495		304650	✓
39	I	-	80	3000	S/EW	-	6732	2515		304647	✓
39	I	-	80	4000	S/EW	-	6732	2495		304651	✓
39	I	-	80	3000	S/EW	-	6732	2515		304648	✓
39	I	-	80	4000	S/EW	-	6732	2495		304652	✓
39	I	-	80	3000	S/EW	-	6732	2515		304649	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
39	I	-	80	4000	S/EW	-	6732	2495		304662	✓
39	I	-	80	3000	S/EW	-	6732	2515		304659	✓
39	I	-	80	4000	S/EW	-	6732	2495		304663	✓
39	I	-	80	3000	S/EW	-	6732	2515		304660	✓
39	I	-	80	4000	S/EW	-	6732	2495		304664	✓
39	I	-	80	3000	S/EW	-	6732	2515		304661	✓



BLIZ SQUARE 40 EM/3P

IP65 - IK07

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - Emergency 3h - 220-240 V 50/60 Hz											
39	I	-	80	4000	S/EW	-	6732	2495		304668	✓
39	I	-	80	3000	S/EW	-	6732	2515		304665	✓
39	I	-	80	4000	S/EW	-	6732	2495		304669	✓
39	I	-	80	3000	S/EW	-	6732	2515		304666	✓
39	I	-	80	4000	S/EW	-	6732	2495		304670	✓
39	I	-	80	3000	S/EW	-	6732	2515		304667	✓



BLIZ SQUARE 40/G

IP65 - IK07

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
39	I	-	80	4000	S/EW	-	6732	2495		304782	✓
39	I	-	80	3000	S/EW	-	6732	2515		304779	✓
39	I	-	80	4000	S/EW	-	6732	2495		304783	✓
39	I	-	80	3000	S/EW	-	6732	2515		304780	✓
39	I	-	80	4000	S/EW	-	6732	2495		304784	✓
39	I	-	80	3000	S/EW	-	6732	2515		304781	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
39	I	-	80	4000	S/EW	-	6732	2495		304788	✓
39	I	-	80	3000	S/EW	-	6732	2515		304785	✓
39	I	-	80	4000	S/EW	-	6732	2495		304789	✓
39	I	-	80	3000	S/EW	-	6732	2515		304786	✓
39	I	-	80	4000	S/EW	-	6732	2495		304790	✓
39	I	-	80	3000	S/EW	-	6732	2515		304787	✓



Optional accessories

DESCRIPTION	COLOR	PART NUMBER	UKCA
BLIZ SQUARE 40			
Polycarbonate diffusor		310255	✓



310255