


HEDO+

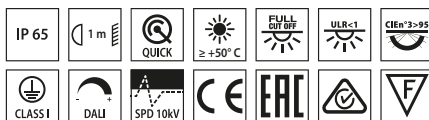


Scan the QR-code for the latest information

■ AN-96 / Anthracite gray / Textured


Pole-top mounted outdoor luminaire, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Coated die-cast aluminium pole-top adaptor for pole Ø 60 / 76 mm
- Microprismatic, flat glass diffuser, silk-screened on the inside
- Anti-ageing custom moulded silicone sealing gasket(s) with resilient elastic return capacity
- The IP66-rated socket-plug fast connector for mains connection without opening the luminaire. Made in PA66 with silver-plated brass contacts for cables Ø 9 - Ø 12 mm
- Built-in driver
- Integral surge protection device (SPD) against mains overvoltages up to 10 kV (CM/DM)
- Stainless steel locking hardware
- UNI 10819 light pollution standards compliant (0% ULR rating)
- Other colour temperatures (CCT) and colour rendering index (CRI) options available. Consult factory
- Design by ROBERTO FIORATO



HEDO+

Identifying and classifying our optics



HEDO+ C/EW

IP65 - IK09

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
42	I	-	80	4000	C/EW	-	6140	3865	■	3104691	✓
42	I	-	80	3000	C/EW	-	5894	3710	■	3104689	✓
23	I	-	80	4000	C/EW	-	3247	2145	■	3104685	✓
23	I	-	80	3000	C/EW	-	3150	2080	■	3104683	✓
Power LED - dimmable DALI 220-240 V 50/60 Hz											
42	I	-	80	4000	C/EW	-	6140	3865	■	3104692	✓
42	I	-	80	3000	C/EW	-	5894	3710	■	3104690	✓
23	I	-	80	4000	C/EW	-	3247	2145	■	3104686	✓
23	I	-	80	3000	C/EW	-	3150	2080	■	3104684	✓

