


CLY

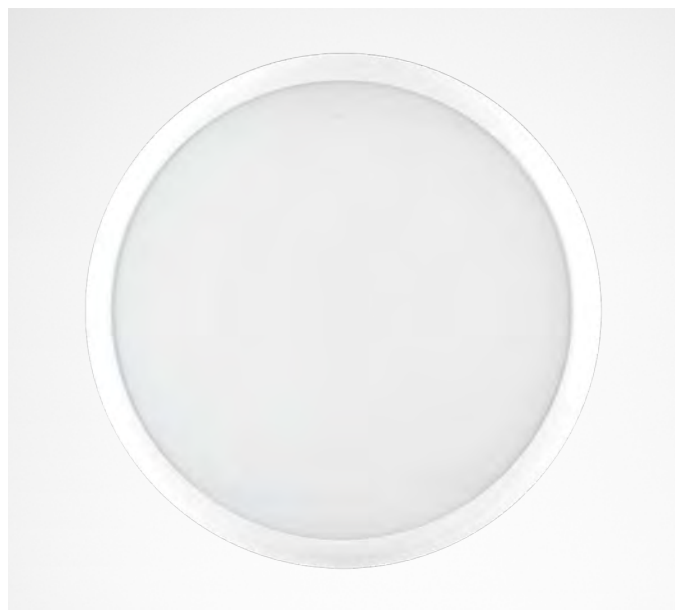


□ WH-87 / White / Matt



Scan the QR-code for the latest information

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:

- Technopolymer housing, trim and diffuser
- Anti-ageing custom moulded silicone sealing gasket(s)
- Class II
- Tilting easy-maintenance SMD LED board
- Dip switch for LED CCT control at 3000K or 4000K, field adjustable
- EM/3P version is designed for multipurpose 3 hours sustained emergency lighting
- Hyper-frequency (HF) sensor operating at 5.8 Ghz +/- 75 Mhz
- The DLS+DETEK versions are supplied with an electronic device complete with a High Frequency sensor and a daylight sensor (DLS). This is programmed to switch the device on automatically when natural light is low, ensuring constant secure lighting at 30% of the luminous flow and reaching 100% of the flow when any presence is detected
- The luminous flux data shown refer to the maximum power operating level



CLY

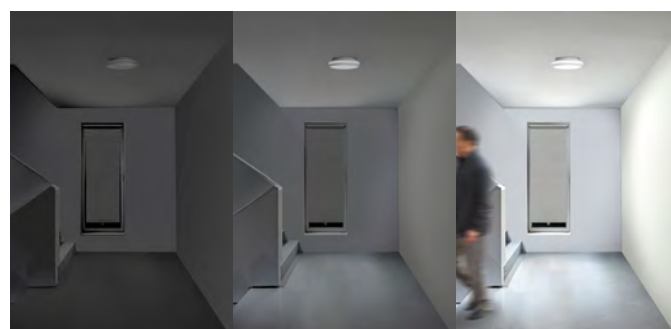

OFF
0%

ON - DLS+DETEK
30%

ON - DLS+DETEK
100%

CLY

IP65 - IK10 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz											
17	II	-	80	3000 4000	S/EW	-	2534	1695		3116565	✓



CLY DLS+DETEK

IP65 - IK10 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED 220-240 V 50/60 Hz + HF Sensor											
17	II	-	80	3000 4000	S/EW	-	2534	1695		3116566	✓



CLY EM/3P

IP65 - IK10 - 850 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - Emergency 3h - 220-240 V 50/60 Hz											
17	II	-	80	3000 4000	S/EW	-	2534	1695		3116567	✓



CLY EM/3P+DLS+DETEK

IP65 - IK10 - 850 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER	UKCA
Power LED - Emergency 3h - 220-240 V 50/60 Hz + HF Sensor											
17	II	-	80	3000 4000	S/EW	-	2534	1695		3116568	✓

